




Datenblatt - Fiche technique - Data sheet

11.02.9010

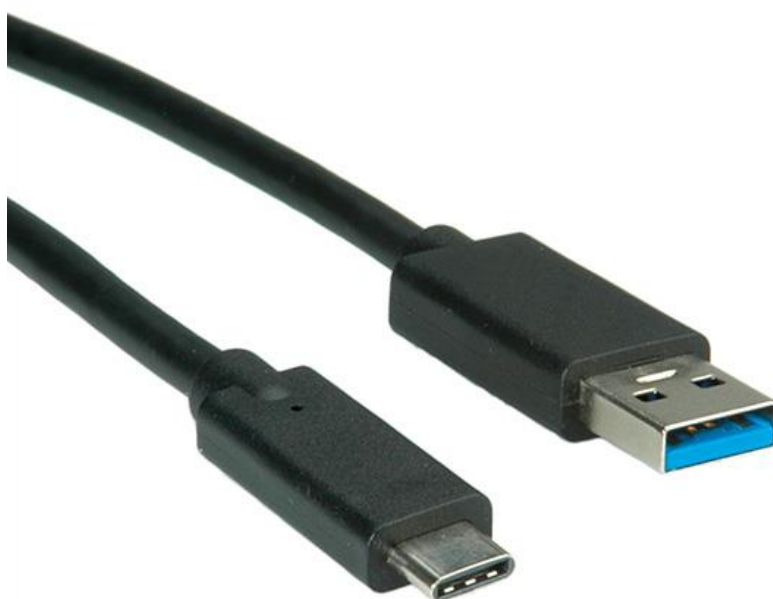

ROLINE USB 3.1 Kabel, A-C, ST/ST, schwarz, 0,5 m

ROLINE Câble USB 3.1, A-C, M/M, noir, 0,5 m

ROLINE USB 3.1 Cable, A-C, M/M, black, 0.5 m

	1	2	3	4	5	6	7	8																																																																																																																																																																									
A									A																																																																																																																																																																								
B									B																																																																																																																																																																								
C	Specification : 1 Cable USB 3.1 Gen1 (32#(7/0.08T)*1P+D(7/0.08T)+AL+MY)*2P+32#(7/0.08T)*1P+24#(7/0.2T)*2C+F+AD(7/0.127B) B(16/5/0.12AL), OD=4.2mm, Printing: E468041...SUPER HIGH SPEED USB Revision 3.0 2 Connector USB TYPE C, Shell: Nickel Plated, Insulator: Black, Pin: Gold Plated, with PCB, 56K Resistor, 10NF Capacitors (AM/C M30-0822-01024) 3 Connector USB 3.1 AM, Insulator: Blue, Pin: Gold Plated 4 Inner Molding LDPE 5 Outer Molding PVC: 45P, Black, RoHS 6 Heat-Shrink Tube Ø1.0, Color: Black, Length=6mm 7 Heat-Shrink Tube Ø2.5, Color: Black, Length=8mm 8 Front Shell For USB 3.1 AM, Nickel Plated 9 Rear Shell For USB 3.1 AM, Nickel Plated 10 Copper Foil W=20mm, Conductive on Double Side, L=50mm								C																																																																																																																																																																								
D	Electrical Test : 1. 100% Test(Open, Short, Miss Wire) 2. Contact Resistance: 3 ohm Max. 3. Insulation Resistance: 5M ohm Min. 4. Hi-pot: 300V DC/10ms Pin Assignment Conn. 1 4 Black 7 Drain 1 Red 3 Green 2 White 6 Blue 5 Yellow 9 Orange 8 Purple Shell Drain Conn. 1 A1, A12, B1, B12 A5 A4, A9, B4, B9 A6 A7 A2 A3 B11 B10 Shell								D																																																																																																																																																																								
E	<table><tr><th>Rev.</th><th>Date</th><th>Contents of Change</th><th>Designer</th><th>Tol±</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>Approve</th><th>Check</th><th>Draw</th><th>Design</th><th>Product Name</th><th colspan="3">ROLINE USB3.1 Cable, A-C, M/M, 0.5m</th></tr><tr><td>△1</td><td></td><td></td><td></td><td>Range</td><td>Pla</td><td>Met</td><td>Ins</td><td>Por</td><td>Cab</td><td>Pac</td><td>Gas</td><td>Dis</td><td></td><td></td><td rowspan="5">Allen</td><td rowspan="5">Allen</td><td rowspan="5"></td><td rowspan="5">Philip</td><td>Drawing Date</td><td>Product No.</td><td>11.02.9010</td><td>R00</td></tr><tr><td>△2</td><td></td><td></td><td></td><td>0~6</td><td>0.1</td><td>0.1</td><td>0.1</td><td>0.2</td><td>0.5</td><td>1</td><td>0.5</td><td>0.2</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△3</td><td></td><td></td><td></td><td>6~30</td><td>0.1</td><td>0.1</td><td>.15</td><td>.25</td><td>1</td><td>1</td><td>0.5</td><td>.25</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△4</td><td></td><td></td><td></td><td>30~80</td><td>0.1</td><td>.15</td><td>0.2</td><td>0.3</td><td>2</td><td>1.5</td><td>1</td><td>0.3</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△5</td><td></td><td></td><td></td><td>80~180</td><td>.15</td><td>.15</td><td>.25</td><td>0.3</td><td>2</td><td>2</td><td>1</td><td>.45</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△6</td><td></td><td></td><td></td><td>180~315</td><td>.15</td><td>0.2</td><td>0.3</td><td>0.4</td><td>2.5</td><td>2</td><td>1</td><td>0.6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△7</td><td></td><td></td><td></td><td>315~800</td><td>0.2</td><td>0.3</td><td>0.4</td><td>0.5</td><td>3</td><td>3</td><td>2</td><td>1.1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>								Rev.	Date	Contents of Change	Designer	Tol±											Approve	Check	Draw	Design	Product Name	ROLINE USB3.1 Cable, A-C, M/M, 0.5m			△1				Range	Pla	Met	Ins	Por	Cab	Pac	Gas	Dis			Allen	Allen		Philip	Drawing Date	Product No.	11.02.9010	R00	△2				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2							△3				6~30	0.1	0.1	.15	.25	1	1	0.5	.25							△4				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3							△5				80~180	.15	.15	.25	0.3	2	2	1	.45							△6				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6											△7				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1											E
Rev.	Date	Contents of Change	Designer	Tol±											Approve	Check	Draw	Design	Product Name	ROLINE USB3.1 Cable, A-C, M/M, 0.5m																																																																																																																																																													
△1				Range	Pla	Met	Ins	Por	Cab	Pac	Gas	Dis			Allen	Allen		Philip	Drawing Date	Product No.	11.02.9010	R00																																																																																																																																																											
△2				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2																																																																																																																																																																					
△3				6~30	0.1	0.1	.15	.25	1	1	0.5	.25																																																																																																																																																																					
△4				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3																																																																																																																																																																					
△5				80~180	.15	.15	.25	0.3	2	2	1	.45																																																																																																																																																																					
△6				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6																																																																																																																																																																					
△7				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1																																																																																																																																																																					
F	<table><tr><th>Rev.</th><th>Date</th><th>Contents of Change</th><th>Designer</th><th>Tol±</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>Approve</th><th>Check</th><th>Draw</th><th>Design</th><th>Product Name</th><th colspan="3">ROLINE USB3.1 Cable, A-C, M/M, 0.5m</th></tr><tr><td>△1</td><td></td><td></td><td></td><td>Range</td><td>Pla</td><td>Met</td><td>Ins</td><td>Por</td><td>Cab</td><td>Pac</td><td>Gas</td><td>Dis</td><td></td><td></td><td rowspan="5">Allen</td><td rowspan="5">Allen</td><td rowspan="5"></td><td rowspan="5">Philip</td><td>Drawing Date</td><td>Product No.</td><td>11.02.9010</td><td>R00</td></tr><tr><td>△2</td><td></td><td></td><td></td><td>0~6</td><td>0.1</td><td>0.1</td><td>0.1</td><td>0.2</td><td>0.5</td><td>1</td><td>0.5</td><td>0.2</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△3</td><td></td><td></td><td></td><td>6~30</td><td>0.1</td><td>0.1</td><td>.15</td><td>.25</td><td>1</td><td>1</td><td>0.5</td><td>.25</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△4</td><td></td><td></td><td></td><td>30~80</td><td>0.1</td><td>.15</td><td>0.2</td><td>0.3</td><td>2</td><td>1.5</td><td>1</td><td>0.3</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△5</td><td></td><td></td><td></td><td>80~180</td><td>.15</td><td>.15</td><td>.25</td><td>0.3</td><td>2</td><td>2</td><td>1</td><td>.45</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△6</td><td></td><td></td><td></td><td>180~315</td><td>.15</td><td>0.2</td><td>0.3</td><td>0.4</td><td>2.5</td><td>2</td><td>1</td><td>0.6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△7</td><td></td><td></td><td></td><td>315~800</td><td>0.2</td><td>0.3</td><td>0.4</td><td>0.5</td><td>3</td><td>3</td><td>2</td><td>1.1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>								Rev.	Date	Contents of Change	Designer	Tol±											Approve	Check	Draw	Design	Product Name	ROLINE USB3.1 Cable, A-C, M/M, 0.5m			△1				Range	Pla	Met	Ins	Por	Cab	Pac	Gas	Dis			Allen	Allen		Philip	Drawing Date	Product No.	11.02.9010	R00	△2				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2							△3				6~30	0.1	0.1	.15	.25	1	1	0.5	.25							△4				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3							△5				80~180	.15	.15	.25	0.3	2	2	1	.45							△6				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6											△7				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1											F
Rev.	Date	Contents of Change	Designer	Tol±											Approve	Check	Draw	Design	Product Name	ROLINE USB3.1 Cable, A-C, M/M, 0.5m																																																																																																																																																													
△1				Range	Pla	Met	Ins	Por	Cab	Pac	Gas	Dis			Allen	Allen		Philip	Drawing Date	Product No.	11.02.9010	R00																																																																																																																																																											
△2				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2																																																																																																																																																																					
△3				6~30	0.1	0.1	.15	.25	1	1	0.5	.25																																																																																																																																																																					
△4				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3																																																																																																																																																																					
△5				80~180	.15	.15	.25	0.3	2	2	1	.45																																																																																																																																																																					
△6				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6																																																																																																																																																																					
△7				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1																																																																																																																																																																					
	1	2	3	4	5	6	7	8																																																																																																																																																																									