



ECONOMY RANGE

7.5mm pitch standard profile rising clamp terminal blocks

Product overview


- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 solid block end stackable
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.33-3.3 mm² (22-12 AWG)
- Guided pin alignment
- Captive screws
-  approved

CTB0112



SPECIFICATION	
Rating	10A 300V
Insulation resistance	5000M Ω /1000V
Withstand voltage	AC1500V/1min
Contact resistance	20m Ω
Working temperature	-33°C to +120°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tin plated brass
Rising clamp	Nickel plated brass
Screw/torque	M2.5 steel, nickel pated 0.4Nm
Recommended PCB hole size	ϕ 1.5mm

PART NO.	POLES	LENGTH
CTB0112/2	2	15mm
CTB0112/3	3	22.5mm
CTB0112/4	4	30mm
CTB0112/5	5	37.5mm
CTB0112/6	6	45mm
CTB0112/7	7	52.5mm
CTB0112/8	8	60mm
CTB0112/9	9	67.5mm
CTB0112/10	10	75mm
CTB0112/11	11	82.5mm
CTB0112/12	12	90mm

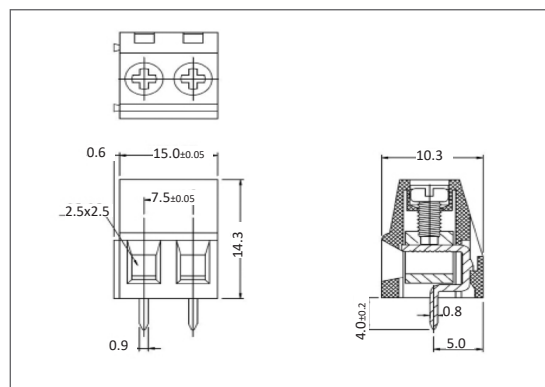

KEY FEATURES

Professional rising clamps | UL94-V0 PA moulding | Interlocking

