



10mm pitch standard profile rising clamp terminal blocks

Product overview


- 2 to 12 pole interlocking
- Professional rising clamp terminals
- Standard profile
- Moulded in green UL94-V0 flame retardant PA66
- Cable acceptance - 0.33-3.31mm² (22-12 AWG)
- Guided pin alignment
-  approved

CTB0202



SPECIFICATION	
Rating	10A 300V
Insulation resistance	5000M Ω /1000V
Withstand voltage	AC1500V/1min
Contact resistance	20m Ω
Working temperature	-33°C to +120°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tin plated brass
Wire clamp	Nickel plated brass
Screw/torque	M2.5 steel, nickel plated 0.4Nm
Recommended PCB hole size	ϕ 1.5mm

PART NO.	POLES	LENGTH
CTB0202/2	2	15.2mm
CTB0202/3	3	25mm
CTB0202/4	4	35mm
CTB0202/5	5	45mm
CTB0202/6	6	55mm
CTB0202/7	7	75mm
CTB0202/8	8	85mm
CTB0202/9	9	95mm
CTB0202/10	10	105mm
CTB0202/11	11	115mm
CTB0202/12	12	125mm

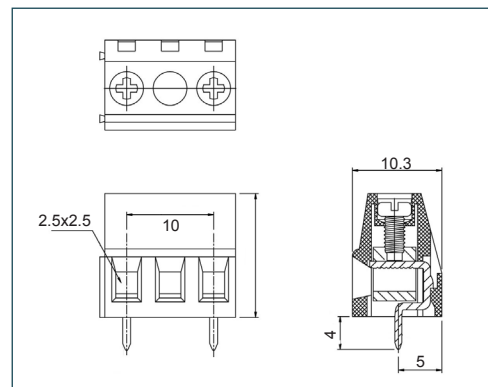

KEY FEATURES

2-12 pole interlocking | Double interlock mechanism | Professional rising clamp

