




ECONOMY RANGE

5mm pitch 45° rising clamp terminal blocks

Product overview


- 2-12 pole interlocking
- Moulded in black UL94-V0 flame retardant PA66
- Professional rising clamp terminal
- 0.2-3.3mm2 (24-12 AWG)
-  approved

CTB3202

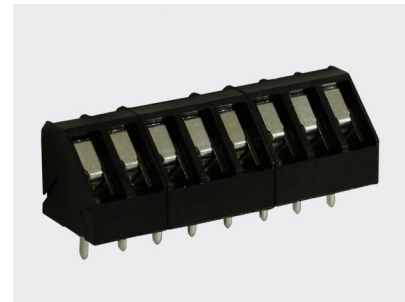

SPECIFICATION	
Rating	15A 300V
Insulation resistance	5000M Ω /1000V
Withstand voltage	AC2000V/1min
Contact resistance	20m Ω
Working temperature	-33°C to +120°C
Mouldings	UL94-V0 flame retardant PA66
Screw/torque	M2.5 steel, nickel plated 0.4Nm
Recommended PCB hole size	ϕ 1.2mm-1.4mm

PART NO.	POLES	LENGTH
CTB3202/2	2	10mm
CTB3202/3	3	15mm
CTB3202/4	4	20mm
CTB3202/5	5	25mm
CTB3202/6	6	30mm
CTB3202/7	7	35mm
CTB3202/8	8	40mm
CTB3202/9	9	45mm
CTB3202/10	10	50mm
CTB3202/11	11	55mm
CTB3202/12	12	60mm

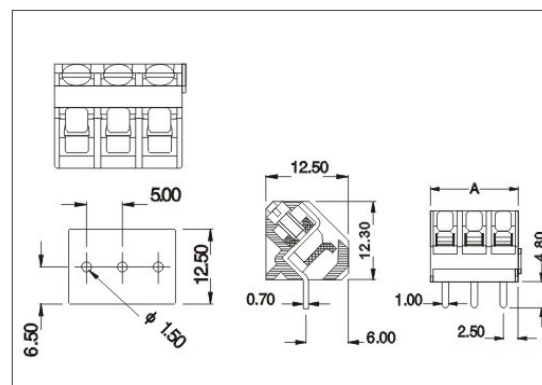

KEY FEATURES

UL94-V0 PA66 moulding | 45 Degree cable entry | Interlocking

