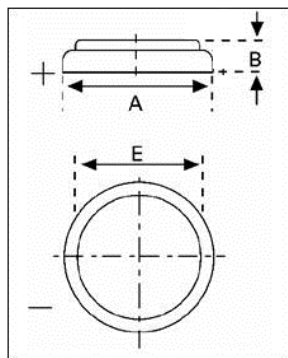


Data Sheet


Type Number 6032
Designation IEC CR 2032
System Li-Manganese dioxide / Organic Electrolyte
UL Recognition MH 13654 (N)
Nominal Voltage 3 V
Typical Capacity C 230 mAh
 Load 5.6 kOhm, at 20°C down to 2 V
Weight (approx.) 3 g
Volume 0,95 ccm
Coding..... Date of Manufacturing Month / Year

Temperature Ranges min. max.
 Storage - 55°C 70°C
 Discharge - 20°C 70°C

Dimensions min. max.
 Diameter (A) 19,7 20,0
 Height (B) 2,9 3,2
 Shoulder Diameter (E) 16,0

Segment Electronic

Main Applications Watch
 Photo
 Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h / d, 7d / w Current [µA]:	5600 Ω	Time: Capacity [mAh]: Energy [mWh]:	460 h 230 645