


ENERGIZER E93

C



Industry Standard Dimensions

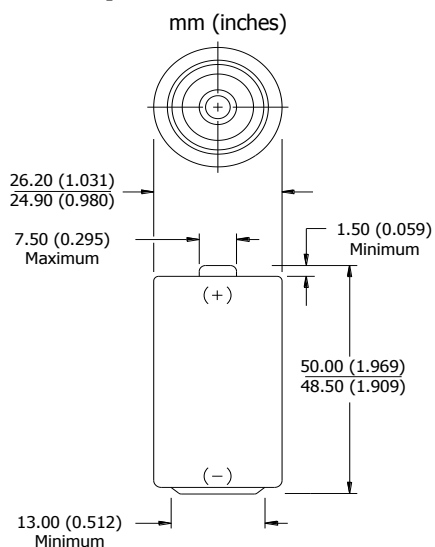


Reversal Protection:
Non-Conductive Area

Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-14A, IEC-LR14
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	66.2 grams (2.3 oz.)
Typical Volume:	26.9 cubic centimeters (1.6 cubic inch)
Jacket:	Plastic Label
Shelf Life:	10 years at 21°C
Terminal:	Flat Contact

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

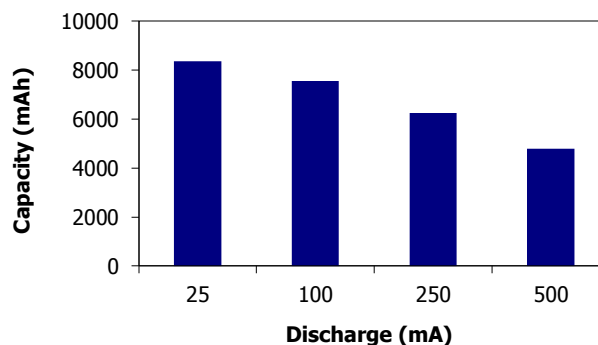

Device Selection Guide:

Portable Stereo



Toy




Lighting



Radio



Battery Selection Indicator

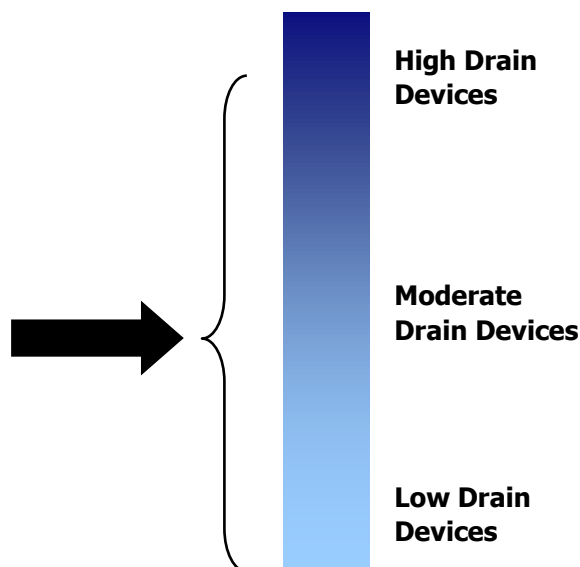


ENERGIZER E93

C


Constant Resistance Performance

Typical Characteristics (21°C)

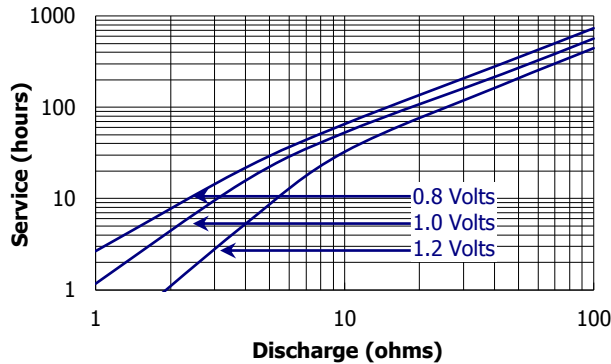


Constant Current Performance

Typical Characteristics (21°C)

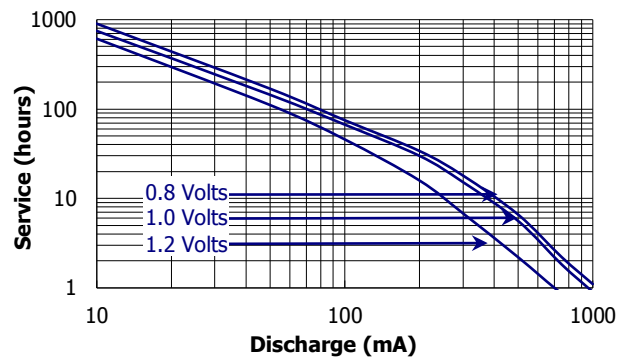


Industry Standard Tests (21°C)


RADIO 20 ohm 4 hrs/day

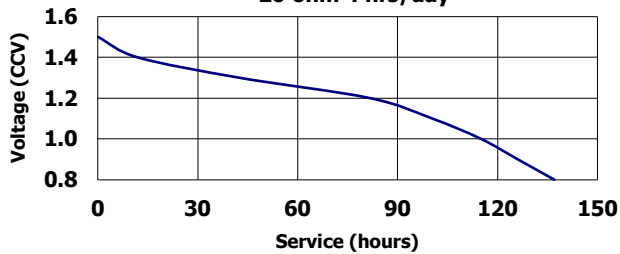


LIGHTING 3.9 ohm LIF

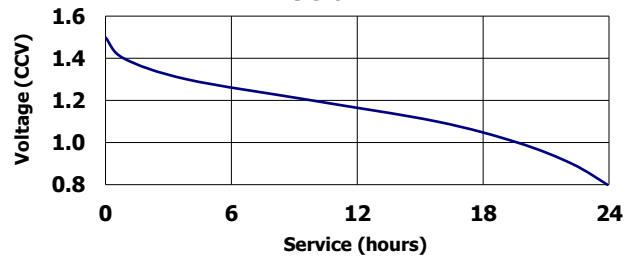

TOY 3.9 ohm 1 hr/day

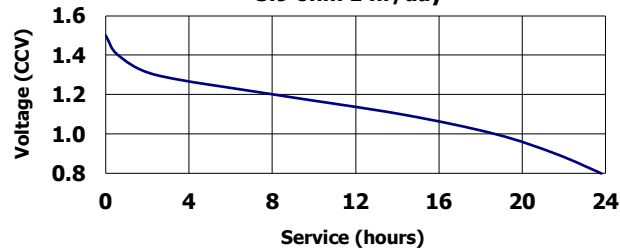

PORTABLE STEREO 400 mA 2 hrs/day

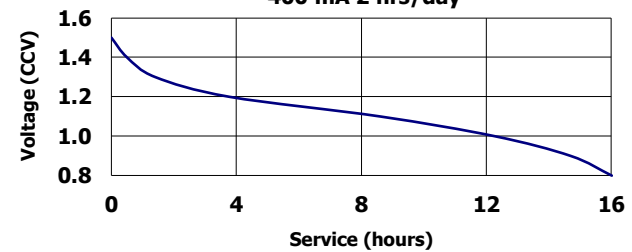

Pack Quantity : 2
 Manufacturers Part Number : E300129500
 Pack Quantity : 4
 Manufacturers Part Number : E300129300