


ENERGIZER CR2032



Industry Standard Dimensions

mm (inches)

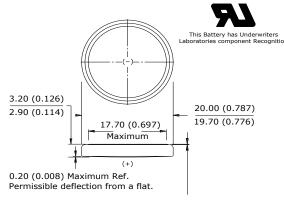

0.10 (0.004) Minimum Ref. (Applies to top edge of gasket or edge of crimp, whichever is higher.)

Lithium Coin

Specifications

Classification: "Lithium Coin"

Chemical System: Lithium / Manganese Dioxide (Li/MnO₂) **Designation:** ANSI / NEDA-5004LC, IEC-CR2032

Nominal Voltage: 3.0 Volts

Typical Capacity: 240 mAh (to 2.0 volts) (Rated at 15K ohms at 21°C)

Typical Weight: 3.0 grams (0.10 oz.)

Typical Volume: 1.0 cubic centimeters (0.06 cubic inch)

Typical IR: $10,000 - 40,000 \text{ m}\Omega$ **Max Rev Charge:** 1 microampere


Energy Density: 198 milliwatt hr/g, 653 milliwatt hr/cc

Typical Li Content: 0.109 grams (0.0038 oz.)


UL Recognized: MH29980
Operating Temp: -30C to 60C
Self Discharge: ~1% / year

- (1) KEEP OUT OF REACH OF CHILDREN. Swallowing may lead to serious injury or death in as little as 2 hours due to chemical burns and potential perforation of the esophagus. Immediately see doctor; have doctor phone (202) 625-3333.
- (2) Battery compartment design. To prevent children from removing batteries, battery compartments should be designed with one of the following methods: a) a tool such as screwdriver or coin is required to open battery compartment or b) the battery compartment door/cover requires the application of a minimum of two independent and simultaneous movements of the securing mechanism to open by hand. Screws should remain captive with the battery door or cover.

Continuous Discharge Characteristics

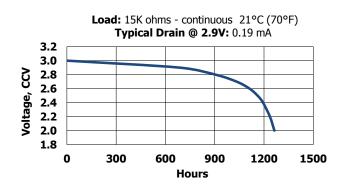

Cross Section

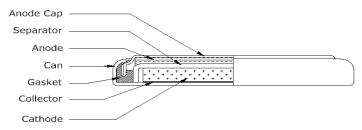

Simulated Application test

Typical Performance at 21°C (70°F)


Schedule:	Typical Drains: at 2.9V	Load	Cutoff 2.0V
	(mA)	(ohms)	(hours)
Continuous	0.19	15,000	1263




ENERGIZER CR2032


Lithium Coin

Pulse Characteristics

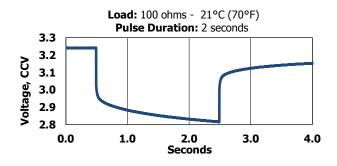

Pulse Discharge Characteristics

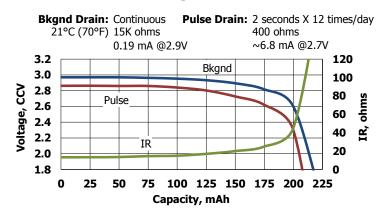

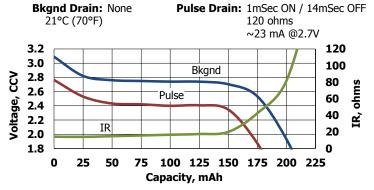

Pack Quantity : 6

Manufacturers Part Number: E300303700