

# QC16 Series

## 1.2x1.6 4-Pad SMD Quartz Crystal Unit



### Features

- 1.2 x 1.6 x 0.4mm ultra miniature package
- Seam sealed ceramic package with metal lid assures high precision and reliability

### Applications

- High density applications
- Modem, communication and test equipment
- PCMCIA, wireless applications
- Automotive applications



| General Specifications                     |                                     |
|--------------------------------------------|-------------------------------------|
| Frequency Range                            | 24.000 to 40.000MHz (Fundamental)   |
| Frequency Tolerance at 25°C                | ±15 to ±30ppm (±30ppm standard)     |
| Frequency Stability over Temperature Range | See Stability vs. Temperature Table |
| Storage Temperature                        | -55 to +125°C                       |
| Aging per Year                             | ±3ppm max.                          |
| Load Capacitance $C_L$                     | 7 to 32pF and Series Resonance      |
| Shunt Capacitance $C_0$                    | 3.0pF                               |
| Equivalent Series Resistance (ESR)         | See ESR Table                       |
| Drive Level                                | 100μW max.                          |
| Insulation Resistance ( $M\Omega$ )        | 500 at 100Vdc ±15Vdc                |

### Equivalent Series Resistance (ESR)


| Frequency Range - MHz | $\Omega$ max. | Mode of Operation |
|-----------------------|---------------|-------------------|
| 24.000 to 31.999      | 120           | Fundamental       |
| 32.000 to 38.399      | 100           |                   |
| 38.400 to 40.000      | 80            |                   |

### Frequency Stability vs. Temperature

| Operating Temperature | ±15ppm | ±20ppm | ±25ppm | ±30ppm | ±50ppm |
|-----------------------|--------|--------|--------|--------|--------|
| -20 to +70°C          | ○      | ○      | ○      | ○      | ●      |
| -40 to +85°C          | ○      | ○      | ○      | ○      | ○      |

● standard ○ available

### Mechanical Dimensions

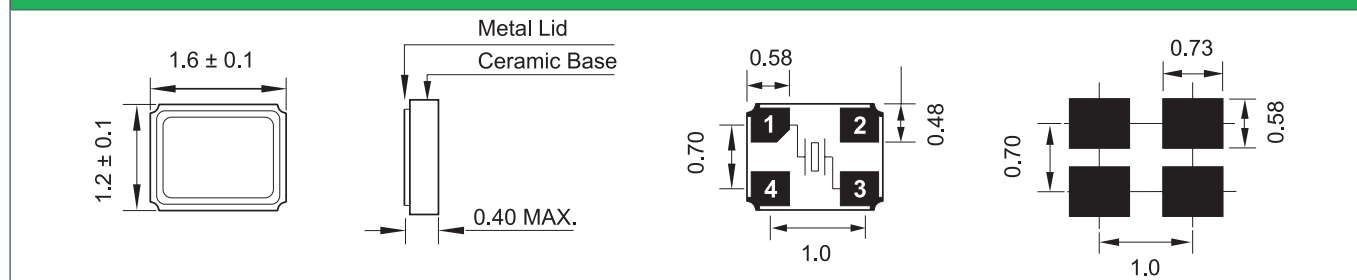

### Part Numbering Guide

| Qantek Code | Package                 | Nominal Frequency (in MHz)                            | Vibration Mode | Load Capacitance                                                          | Operating Temperature Range                 | Frequency Tolerance                                         | Frequency Stability                                                       | Automotive Indicator | Packaging                                                               |
|-------------|-------------------------|-------------------------------------------------------|----------------|---------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------|
| Q = Qantek  | C16 = 1.2x1.6 4-Pad SMD | 7 digits including the decimal point (f.i.e. 12.0000) | F = AT-Fund    | S = Series<br>08 = 8pF<br><b>12 = 12pF</b><br>18 = 18pF<br>20 = 20pF etc. | A = -20 to +70°C<br><b>B = -40 to +85°C</b> | 1 = ±15ppm<br>2 = ±20ppm<br>3 = ±25ppm<br><b>4 = ±30ppm</b> | 1 = ±15ppm<br>2 = ±20ppm<br>3 = ±25ppm<br>4 = ±30ppm<br><b>5 = ±50ppm</b> | not available        | M = 250pcs Tape&Reel<br>R = 1000pcs Tape&Reel<br>R3 = 3000pcs Tape&Reel |

Example: QC1624.0000F12B45R

bold letters = recommended standard specification



**QANTEK Technology Corporation**

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)


www.qantek.com

info@qantek.com

# QC16 Series

## 1.2x1.6 4-Pad SMD Quartz Crystal Unit

### Tape and Reel Dimensions

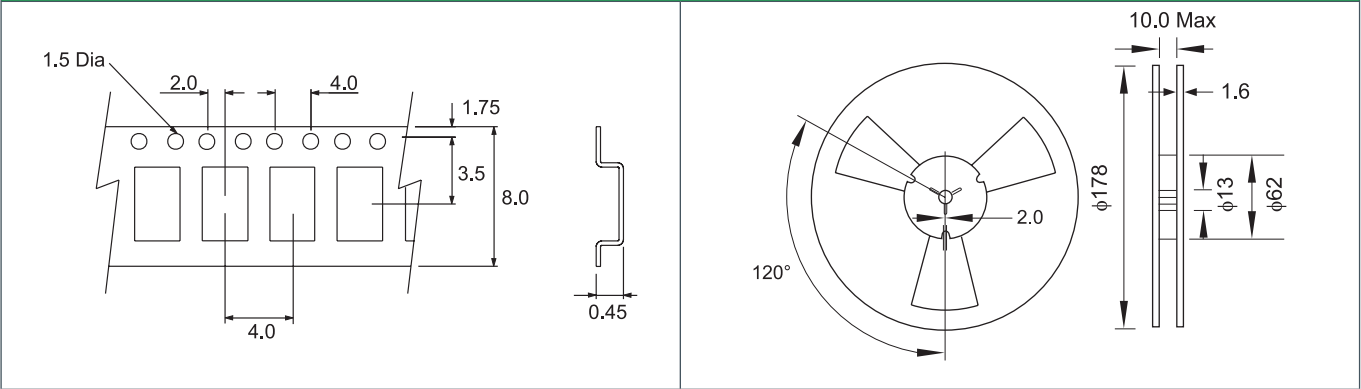


### Marking Code Guide

Contains frequency, Qantek manufacturing code, production code (month and year) and load capacitance.

| Year/Month Codes |     |     |     |     |     |     |     |     |     |     |     |     | Load Capacitance Code in pF |         |    |         |
|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------------|---------|----|---------|
|                  | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec | pF                          | PN Code | pF | PN Code |
| 2011 / 2015      | A   | B   | C   | D   | E   | F   | G   | H   | J   | K   | L   | M   | 12                          | A       | 20 | F       |
| 2012 / 2016      | N   | P   | Q   | R   | S   | T   | U   | V   | W   | X   | Y   | Z   | 18                          | B       | 22 | G       |
| 2013 / 2017      | a   | b   | c   | d   | e   | f   | g   | h   | j   | k   | l   | m   | 8                           | C       | 30 | H       |
| 2014 / 2018      | n   | p   | q   | r   | s   | t   | u   | v   | w   | x   | y   | z   | 10                          | D       | 32 | I       |
|                  |     |     |     |     |     |     |     |     |     |     |     |     | 16                          | E       | S  | S       |

*Example: First Line: 240 (Frequency) Second Line: QAA (Qantek - January 2011 - 12 pF)*

### Solder Reflow Profile

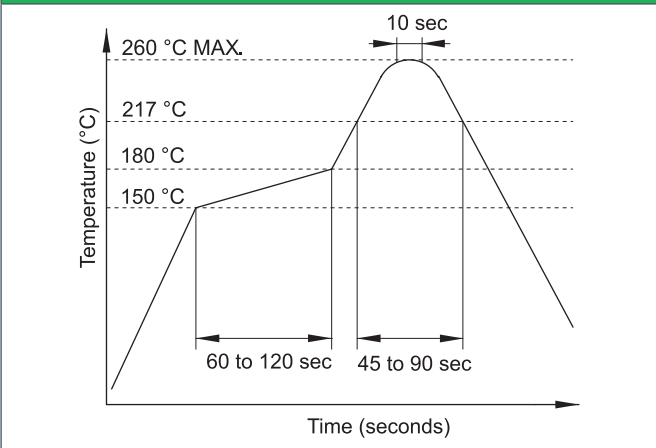

### Environmental Specifications

|                  |                               |
|------------------|-------------------------------|
| Mechanical Shock | MIL-STD-202, Method 213, C    |
| Vibration        | MIL-STD-202, Method 201 & 204 |
| Thermal Cycle    | MIL-STD, Method 1010, B       |
| Gross Leak       | MIL-STD-202, Method 112       |
| Fine Leak        | MIL-STD-202, Method 112       |

All specifications are subject to change without notice.