

QCP9 Series


4.6x12.5 4-Pad Plastic SMD Crystal Unit

Features

- Excellent environmental and heat resistance plastic package with reflow capability
- Extended temperature -40 to +85°C for industrial applications

Applications

- Commercial and Industrial applications



General Specifications	
Frequency Range	3.579545 to 27.000MHz (Fundamental)
Frequency Tolerance at 25°C	±30 to ±50ppm (±50ppm standard)
Frequency Stability over Temperature Range	See Stability vs. Temperature Table
Storage Temperature	-55 to +125°C
Aging per Year	±5ppm max.
Load Capacitance C_L	10 to 32pF
Shunt Capacitance C_0	7.0pF max.
Equivalent Series Resistance (ESR)	See ESR Table
Drive Level	100μW typ. (500μW max)
Insulation Resistance ($M\Omega$)	500 at 100Vdc ±15Vdc

Equivalent Series Resistance (ESR)		
Frequency Range - MHz	Ω max.	Mode of Operation
3.500 to 3.999	200	Fundamental
4.000 to 6.999	150	
7.000 to 8.999	120	
9.000 to 11.999	100	
12.000 to 13.999	80	
14.000 to 19.999	70	
20.000 to 27.000	60	

Frequency Stability vs. Temperature			
Operating Temperature	±30ppm	±50ppm	±100ppm
-20 to +70°C	○	○	○
-40 to +85°C	○	●	○
● standard ○ available			

Mechanical Dimensions			

Part Numbering Guide								
Qantek Code	Package	Nominal Frequency (in MHz)	Vibration Mode	Load Capacitance	Operating Temperature Range	Frequency Tolerance	Frequency Stability	Packaging
Q = Qantek	CP9 = 4.6x12.5 4-Pad SMD	7 digits including the decimal point (f.i.e. 12.0000)	F = AT-Fund	12 = 12pF 16 = 16pF 18 = 18pF 20 = 20pF 30 = 30pF etc.	A = -20 to +70°C B = -40 to +85°C	3 = ±30ppm 5 = ±50ppm 0 = ±100ppm	3 = ±30ppm 5 = ±50ppm 0 = ±100ppm	R = 1000pcs Tape&Reel R3 = 3000pcs Tape&Reel
Example: QCP912.0000F12B55R						bold letters = recommended standard specification		



QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)


Fax: +1 877-227-0440 (tollfree)

www.qantek.com

info@qantek.com

QCP9 Series

4.6x12.5 4-Pad Plastic SMD Crystal Unit

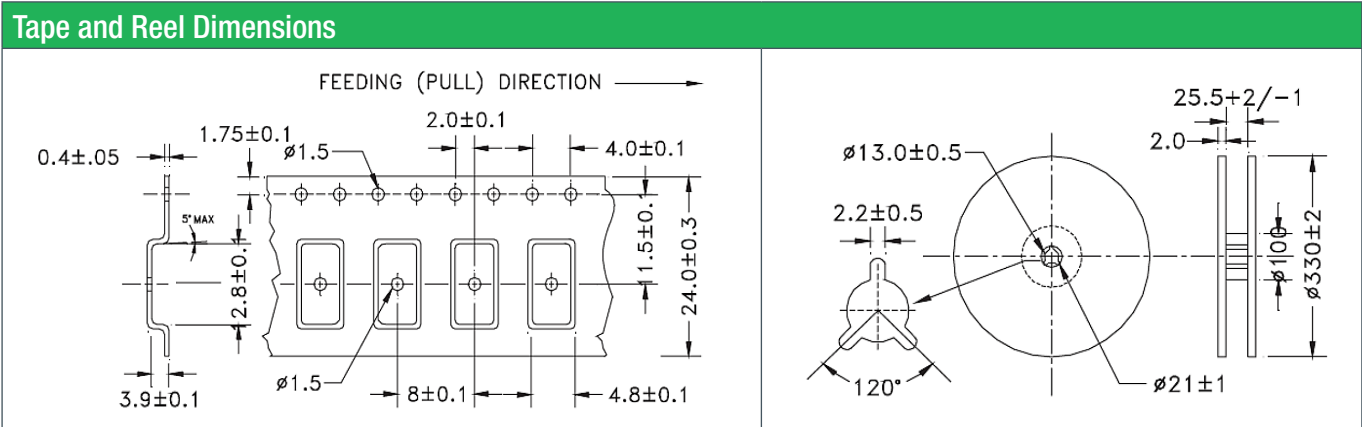

Marking Code Guide

Contains frequency

