

QX1 Series

1.6x2.0 SMD HCMOS Clock Oscillator

Features

- Ultra-miniature 1.6 x 2.0 x 0.6mm package
- Frequency Range 4MHz to 50 MHz
- Tristate (Enable/Disable) function as standard
- Supply voltage 1.8, 2.5 or 3.3 Volts

Description

QX1 ultra-miniature oscillators consist of a TTL/HCMOS-compatible hybrid circuit and a miniature quartz crystal packaged in a low-profile, industry-standard ceramic package.



General Specifications	
Frequency Range	1.000 to 50.000MHz
Output Logic	HCMOS
Temperature Stability*	±100ppm
	±50ppm
	±30ppm
	±25ppm
Phase Jitter RMS	<1ps typ.
Aging per year	±5ppm
Operating Temperature Range	Standard -20 to +70°C
	Industrial -40 to +85°C
	Extended -40 to +105°C
	Automotive -40 to +125°C
Storage Temperature Range	-55 to +125°C
* Frequency stability is inclusive of calibration tolerance at 25°C, frequency change due to shock & vibration, ±10% supply voltage variation and stability over temperature range.	

Electrical Specifications		1.8Vdd ± 5%	2.5Vdd ± 5%	3.3Vdd ± 5%
Input Current	1.000 to 10.000MHz	3mA	4mA	5mA
	10.100 to 20.000MHz	4mA	5mA	6mA
	20.100 to 32.000MHz	5mA	6mA	7mA
	32.100 to 50.000MHz	6mA	7mA	8mA
Output Voltage	Logic High (Voh)	90% Vdd min.		
	Logic Low (Vol)	10% Vdd max.		
Output Symmetry	Standard	40 to 60%		
	Tight	45 to 55%		
Output Load		15pF max.		
Rise and Fall Time	1.000 to 10.000MHz	6ns max.	5ns max.	5ns max.
	10.100 to 20.000MHz	6ns max.	5ns max.	5ns max.
	20.100 to 32.000MHz	5ns max.	5ns max.	5ns max.
	32.100 to 50.000MHz	4ns max.	4ns max.	4ns max.
Enable-Disable Function		Tri-State		
Start Up Time		10 ms max.		

Mechanical Dimensions	
Pin Connection: #1 E/D, #2 GND, #3 Output, #4 VDC Enable/Disable Function: E/D (#1) Output (#3), High (Open) Operating, Low High Impedance	

Part Numbering Guide									
Qantek Code	Package	Supply Voltage	Frequency Stability	Frequency	Operating Temperature Range	Automotive Indicator	Load Capacitance	Tight Symmetry Indicator	Packaging
Q = Qantek	X1 = 1.6x2.0	18 = 1.8V 25 = 2.5V 33 = 3.3V	A = ±25ppm B = ±50ppm C = ±100ppm D = ±20ppm	in MHz, always 8 digits including the decimal point (f.ie. 20.00000)	A = -20 to +70°C B = -40 to +85°C C = -40 to +105°C D = -40 to +125°C	A = AEC-Q200	15 = 15pF	T = 45/55	R = Tape&Reel M = Minireel (250pcs Tape&Reel)
Example: QX133B20.00000B15R bold letters = recommended standard specification									



QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)


www.qantek.com

info@qantek.com

QX1 Series

1.6x2.0 SMD HCMOS Clock Oscillator

Tape and Reel Dimensions

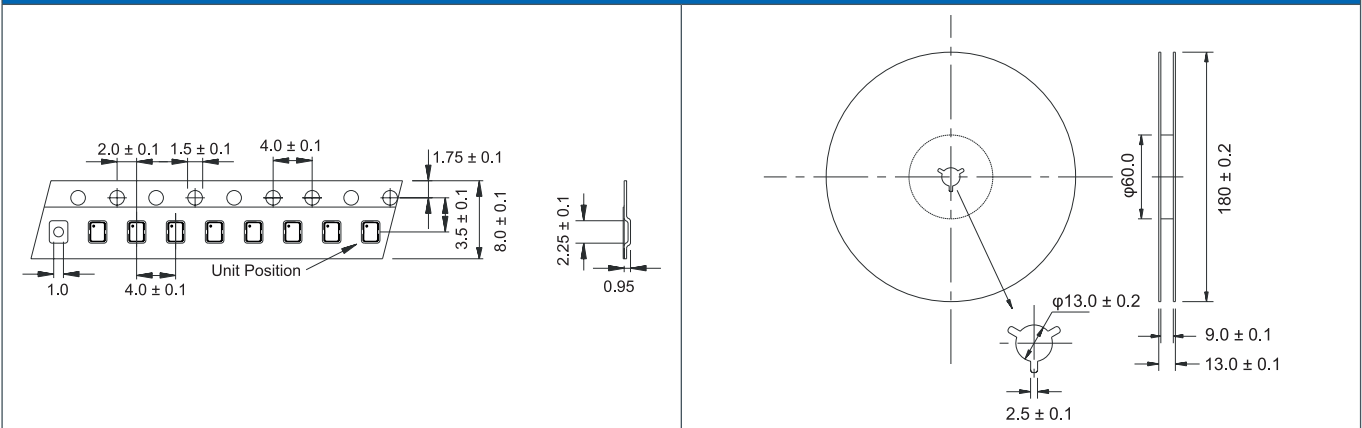


Marking Code Guide

Contains frequency, Qantek manufacturing code, production code (month and year), stability, temperature range and voltage indicator.

Year/Month Codes													Stability / Temperature Range					Voltage	
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	ppm	20	25	50	100	Volt	PN Code
2015 / 2019	A	B	C	D	E	F	G	H	J	K	L	M	-20 to +70°C	A	B	C	D	1.8	1
2016 / 2020	N	P	Q	R	S	T	U	V	W	X	Y	Z	-40 to +85°C	E	F	G	H	2.5	2
2017 / 2021	a	b	c	d	e	f	g	h	j	k	l	m	-40 to +105°C	-	-	I	J	3.3	3
2018 / 2022	n	p	q	r	s	t	u	v	w	x	y	z	-40 to +125°C	-	-	-	K	custom	S

Example: First Line: QAG3 (QANTEK – January 2019 – ±50ppm / -40 to +85°C – 3.3V) Second Line: 250 (Frequency)

Solder Reflow Profile

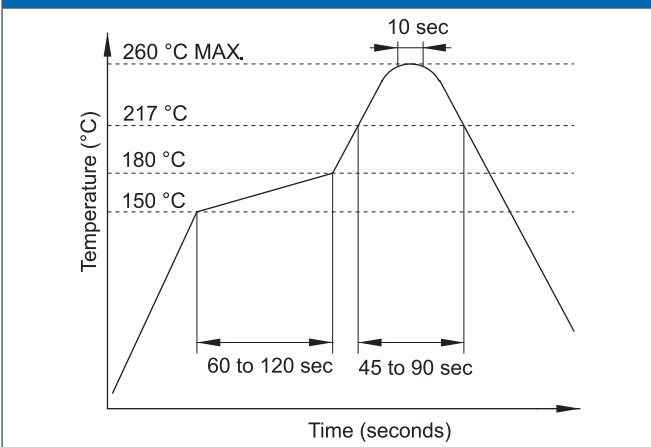

Environmental Specifications

Mechanical Shock	MIL-STD-202, Method 213, C
Vibration	MIL-STD-202, Method 201 & 204
Thermal Cycle	MIL-STD, Method 1010, B
Gross Leak	MIL-STD-202, Method 112
Fine Leak	MIL-STD-202, Method 112

All specifications are subject to change without notice.



QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)

www.qantek.com

info@qantek.com