



TW3320/TW3322 Wideband GPS/GLONASS Antenna


The TW3320/TW3322 is a high performance antenna covering the GPS L1, GLONASS L1 and SBAS (WAAS, EGNOS & MSAS) frequency band (1575 to 1606 MHz). It features a patch element with 40% wider bandwidth than hitherto available in this format. Unlike its competitors, both GPS-L1 and GLONASS signals are included in the 1dB received power bandwidth.

The TW3320/TW3322 has a two stage Low Noise Amplifier with a mid-section SAW. An optional tight pre-filter is available with part number TW3322 to protect against saturation by high level sub-harmonics and L-Band signals.

The TW3320/3322 is housed in a permanent mount industrial-grade weather-proof enclosure. Two options for pole mounting are available an L-bracket (P/N#23-0040-0) or a pipe mount (P/N#23-0065-0)



TW3320/TW3322
Shown with Low Profile Radome. Conical
Radome also available

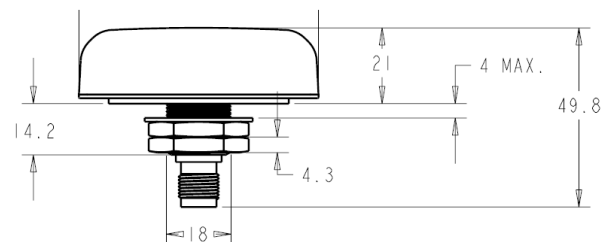

Applications

- Cost Sensitive Mission Critical Positioning
- Military & Security
- Fleet Management & Asset Tracking

Features

- Low noise LNA: 1 dB typical (TW3320)
- High rejection mid-section SAW filter
- Available Pre-filter (TW3322)
- High gain: 28 dB typ.
- Wide voltage input range: 2.5 to 16 VDC
- IP67 weather proof housing
- Low Power: 9mA typ.

Benefits

- Bandwidth fully Includes GPS-L1 & GLONASS
- Excellent multipath rejection
- Increased system accuracy
- Excellent signal to noise ratio
- Great out of band signal rejection
- Ideal for harsh environments
- RoHS compliant



TW3320/TW3322 Wideband GPS/GLONASS Antenna Specifications

Antenna

Architecture	Wideband Single Feed Patch
1 dB Bandwidth	31 MHz
10dB Return Loss Bandwidth	45MHz
Antenna Gain (with 100mm ground plane)	4.5 dBic
Axial Ratio	<4dB @ 1590MHz, 8 dB typical at band edges

Electrical

Architecture	TW3320	LNA stage 1 -> SAW filter-> LNA stage 2
	TW3322	SAW Prefilter ->LNA stage 1 -> SAW filter-> LNA stage 2
Filtered LNA Frequency Bandwidth		1574 to 1606 MHz
Polarization		RHCP
Gain (1575.42 to 1606 MHz)		28dB min., TW3320; 26dB, TW3322,
Gain flatness		+/- 2 dB, 1575 to 1606 MHz
Out-of-Band Rejection		<1500 MHz >35 dB
		<1550 MHz >25 dB
		>1640 MHz >35 dB
VSWR (at LNA output)		<1.5:1
Noise Figure		1 dB typ., TW3320; 2.5dB typ., TW3322
Supply Voltage Range (over coaxial cable)		+2.5 to 16 VDC nominal
Supply Current		9 mA typ
ESD Circuit Protection		15 KV air discharge

Mechanicals & Environmental

Mechanical Size	66.5 mm dia. x 21 mm H
Operating Temperature Range	40 to +85 °C
Enclosure	Radome: EXL9330, Base: Zamak White Metal
Weight	150 g
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G

Ordering Information

Legacy Part Numbers:

TW3320 – GPS/Glonass Antenna

32-3320-xx-yy

TW3322 – GPS/Glonass Antenna with Pre-filter

32-3322-xx-yy

Connector:

xx = 00 TNC

xx = 01 N Type (premium applies)

Radome Colour

yy = 10 Dark grey low profile

yy = 11 White low profile

* As a result of a growing product portfolio, Tallysman has rationalized its part number system. No changes have been made to the mechanical or electrical properties of these products. Where administratively possible, please use the following Part Numbers.

TW3320 – GPS/GLONASS antenna

33-3320-xx-yy-zzzz

TW3322 – 33-3322-xx-yy-zzzz

Where xx = connector type, yy = type and colour of radome, and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

106 Schneider Road, Unit 3

Ottawa ON K2K 1Y2 Canada

Tel 613 591 3131

Fax 613 591 3121

sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind.

© 2010 Tallysman Wireless Inc. All rights reserved.

Rev 3.2