

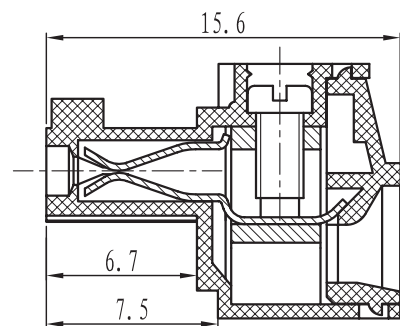


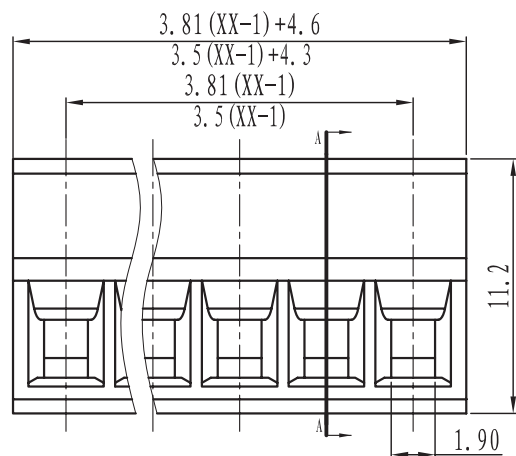

SECTION A-A

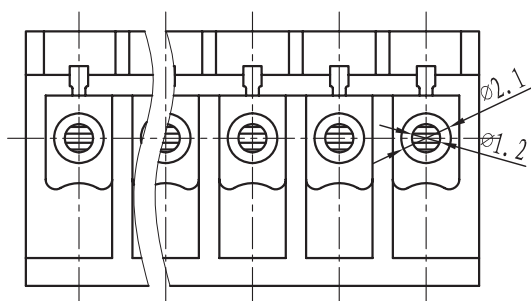

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	short angle sid	≡	—	□	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to 10	to 10	over 10 to 50	over 50 to 120	to 120	to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5

Electrical

Standard: UL IEC

Rated voltage: 300V 250V

Rated current: 8A 10A

Contact resistance: 20mΩ

Wire range: 28-16AWG 1.5mm²

Withstanding voltage: AC2000V/1Min

Insulation resistance: 500MΩ/DC500V

Mechanical

Temp.Range: -40° C~+105° C

Torque: 0.2Nm (1.71lb`in)

Strip length: 6-7mm

Dimensions

Pitch: 3.81mm/3.5mm

Poles: 2P-24P

Material

Housing: PA66,UL94V-0

Screws: M2, steel Zinc plated

Wire guard: Brass, Ni plated

Clamp: Phosphor bronze, Ni plated

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	20.1550M-E 21.1550M-E