

IPSAT Series

Intrinsically Safe Pressure Transducer



Approvals:-
ATEX / IECEx

II 1G Ex ia IIC T4 Ga (Ta -see schedule)



- **Piezo-resistive thick film ceramic sensor**
- **Stainless steel body**
- **Accuracy $\leq \pm 0.25\%$ FS BFSL**
- **Pressure ranges from -1 to 400 bar**

The IPSAT series is ideally suited for use in a wide range of industrial applications in hazardous areas. The probe uses a piezo-resistive ceramic sensor, giving excellent media compatibility within a stainless steel housing

The electronics incorporate a microprocessor based amplifier, requiring no adjusting and giving stable electronics, especially industrial applications.

Each device is temperature compensated, calibrated and supplied with a traceable serial number and calibration data.



Electrical Protection

Supply reverse polarity	No damage but also no function
Electromagnetic compatibility	CE Compliant

Mechanical Stability

Shock	100g / 11s
Vibration	10g RMS (20 - 2000Hz)

Environment & Thermal Effects

Ambient Temperature Range	-20°C to +75°C
Storage temperature	-20°C to +80°C
Compensated temperature range	+20°C to +80°C
Thermal Zero Shift (TZS)	$\leq \pm 0.04\%$ /FS/°C
Thermal Span Shift	$\leq \pm 0.015\%$ /°C
Permissible environment	Zone 0

Performance

Accuracy (Non-Linearity & Hysteresis)	$\leq \pm 0.25\%$ / FS (BFSL)
Setting Errors (offsets)	Zero & Full Scale, $\leq \pm 0.5\%$ / FS

Material Specifications

Housing	316 Stainless Steel
"O" ring seals	Viton
Diaphragm	Ceramic Al ₂ O ₃ 96%
Media wetted parts	Housing & connection, "O" ring seal, diaphragm
Weight	Approx 100g
Installation position	Any
Operational Life	> 100x 10 ⁶ cycles
Insulation resistance	> 50MΩ at 50Vdc

Pressure Ranges

Nominal Pressure, Gauge,	bar	1	2	5	10	20	50	100	250	400
Compound range	bar	-1 to 0	-1 to 2	-1 to 5	-1 to 9	-1 to 19	-1 to 24			
Permissible Overpressure	bar	2	4	10	20	40	100	200	400	650
Burst Pressure	bar	4	5	12	25	50	120	250	500	650

Output Signal and Supply Voltage

Wire system	Output	Supply Voltage	Connection	Pin Nos
2-wire	4-20mA	10-28Vdc	+ve Supply	Pin 1
			-ve Supply	Pin 2
			Ground	Earth Pin

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email:sales@cynergy3.com

ISO9001 CERTIFIED
IPSAT 2017



www.cynergy3.com


IPSAT Series

Intrinsically Safe Pressure Transducer



Part Number	Pressure Rating
IPSAT-G1000-5	0 - 1 Bar G
IPSAT-G6000-5	0 - 6 Bar G
IPSAT-GM1P9-5	-1 to +9 Bar G
IPSAT-G1002-5	0 - 10 Bar G
IPSAT-G1602-5	0 - 16 bar G
IPSAT-C0184-5	-1 to +24 Bar G
IPSAT-G2502-5	0 - 25 Bar G
IPSAT-G4002-5	0 - 40 Bar G
IPSAT-G1003-5	0 - 100 Bar G
IPSAT-G2503-5	0 - 250 Bar G
IPSAT-G4003-5	0 - 400 Bar G

Mechanical Dimensions

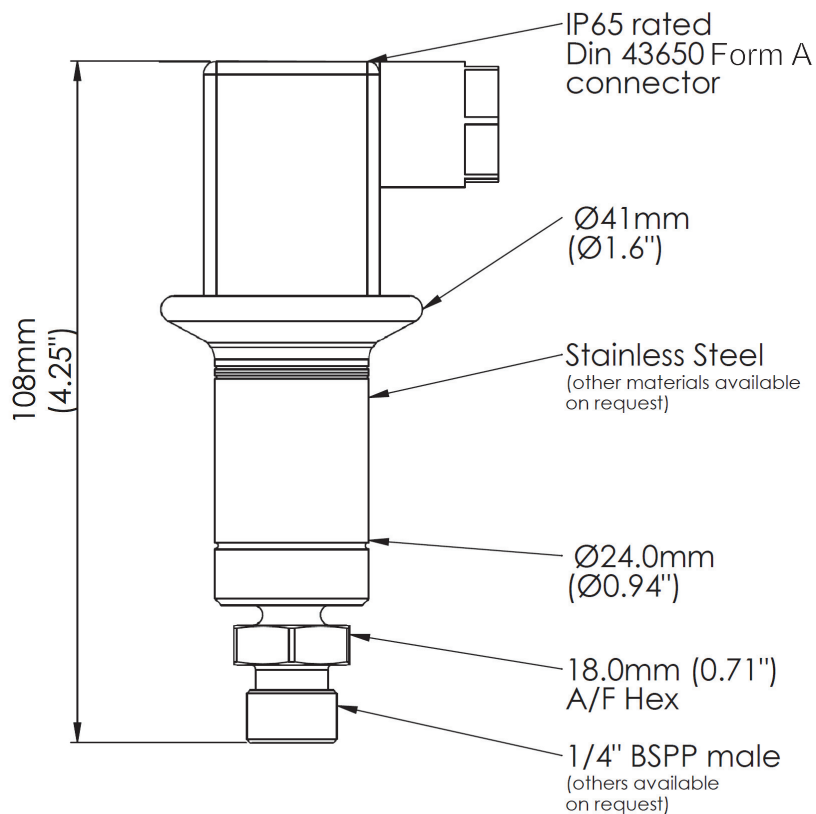

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED



www.cynergy3.com