





5mm pitch standard profile 90° screw terminal blocks

Product overview


- 2 and 3 pole interlocking
- Wire protector terminals
- Standard profile 90° mounting
- Moulded in UL94-V0 flame retardant PA66
- Cable acceptance - 0.6-1.6mm² (22-14AWG)
- Guided pin alignment
- Anti solder wicking terminals
-   approved

CTBPI050



SPECIFICATION	
Rating	UL=16A/300V, VDE=24A/250V
Insulation resistance	500M Ω /500V
Withstand voltage	AC2000V/1min
Contact resistance	20m Ω (max)
Working temperature	-40°C to +105°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tin plated brass
Wire protector	Phosphor bronze, nickel plated
Screw/torque	M2.5 steel, zinc plated 0.4Nm
Recommended PCB hole size	ϕ 1.5mm

PART NO.	POLES	LENGTH
CTBPI050/2	2	10mm
CTBPI050/3	3	15mm
CTBPI050/4	4	20mm
CTBPI050/5	5	25mm
CTBPI050/6	6	30mm
CTBPI050/7	7	35mm
CTBPI050/8	8	40mm
CTBPI050/9	9	45mm
CTBPI050/10	10	50mm
CTBPI050/11	11	55mm
CTBPI050/12	12	60mm

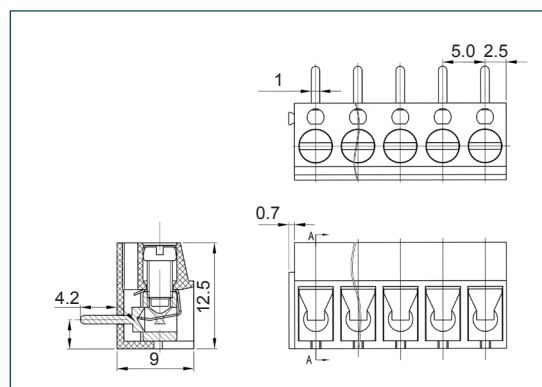

KEY FEATURES

Wire protector terminals | Interlock mechanism | Standard profile

