



002

PCB TERMINAL
BLOCKS

5mm triple decker rising clamp terminal blocks

Product overview


- Triple decker terminals
- Moulded in green UL94-V0 flame retardant PA66
- 2.5mm² - IEC
- 30-14 AWG - UL
- Professional rising clamp terminals
- Guided pin alignment
- approved

CTBPTDVG



SPECIFICATION	
Rating	UL=15A/300V VDE=18A/250V
Insulation resistance	500M Ω /500V
Withstand voltage	AC2000V/1min
Contact resistance	20m Ω (max)
Working temperature	-40°C to +105°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tin plated brass
Rising clamp	Brass, nickel plated
Screw/torque	M2.5 steel, zinc plated 0.4Nm
Recommended PCB hole size	$\varnothing$ 1.5mm

PART NO.	POLES	LENGTH
CTBPTDVG/2	6	12.5mm
CTBPTDVG/3	9	17.5mm
CTBPTDVG/4	12	22.5mm
CTBPTDVG/5	15	27.5mm
CTBPTDVG/6	18	32.5mm
CTBPTDVG/7	21	37.5mm
CTBPTDVG/8	24	42.5mm
CTBPTDVG/9	27	47.5mm
CTBPTDVG/10	30	52.5mm
CTBPTDVG/11	33	57.5mm
CTBPTDVG/12	36	62.5mm

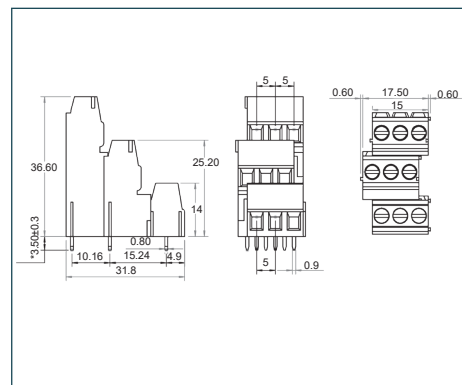

KEY FEATURES

Flame retardant PA66 | Triple decker terminals | Professional rising clamp



081

TERMINAL STRIPS

095

WIRE TO BOARD
CONNECTORS

100

CIRCULAR
CONNECTORS

151

IP68 CONNECTORS

158

INTERFACE
MODULES AND
RELAY BASES