





5.08mm pitch low profile rising clamp terminal blocks

Product overview


- 2 and 3 pole double interlocking mechanism for increased strength
- Professional rising clamp terminals
- Low profile
- Moulded in green UL94-V0 flame retardant PA66
- Cable acceptance - 0.4-1.3mm² (26-16AWG)
- Guided pin alignment
-   approved

CTBP0508

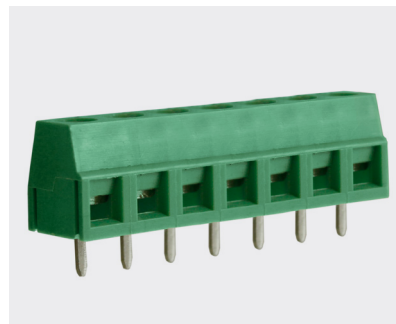

SPECIFICATION	
Rating	UL=8A/300V, VDE=15A/250V
Insulation resistance	500M Ω /500V
Withstand voltage	AC2000V/1min
Contact resistance	20m Ω (max)
Working temperature	-40°C to +105°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tin plated brass
Rising clamp	Brass, nickel plated
Screw/torque	M2.5 steel, zinc plated 0.4Nm
Recommended PCB hole size	ϕ 1.3mm

PART NO.	POLES	LENGTH
CTBP0508/2	2	10.16mm
CTBP0508/3	3	15.24mm
CTBP0508/4	4	20.32mm
CTBP0508/5	5	25.4mm
CTBP0508/6	6	30.48mm
CTBP0508/7	7	35.56mm
CTBP0508/8	8	40.64mm
CTBP0508/9	9	45.72mm
CTBP0508/10	10	50.8mm
CTBP0508/11	11	55.88mm
CTBP0508/12	12	60.96mm

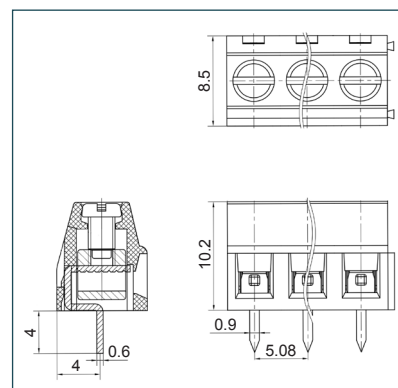

KEY FEATURES

Low profile | Double interlock mechanism | Professional rising clamp

