

CERAMIC SMD CRYSTAL



ABM3B-155-12.800 MHz

5.0 X 3.2 X 1.1 mm

RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

FEATURES

- Fundamental mode
- Suitable for reflow
- Tight stability
- Ceramic package and metal lid assures high precision and reliability
- Seam sealing

APPLICATIONS

- Cellular telephones, pagers
- Communication and test equipment
- High density applications
- PCMCIA and wireless applications

STANDARD SPECIFICATIONS

PARAMETERS	MINIMUM	TYPICAL	MAXIMUM	UNITS	NOTES
Center Frequency	12.800			MHz	
Operation Mode	Fundamental				
Operating Temperature	-40		+85	°C	
Storage Temperature	-40		+85	°C	
Frequency Tolerance @ 25°C	-10		+10	ppm	
Frequency Stability over the Operating Temperature (ref. to +25°C)	-20		+20	ppm	
Equivalent series resistance (R1)			70	Ω	
Shunt capacitance (C0)			7	pF	
Load capacitance (CL)	16			pF	
Drive Level		10	100	μW	
Aging	-5		+5	ppm	First year@25°C±3°C
Insulation Resistance	500			MΩ	@100Vdc±15V

OPTIONS AND PART IDENTIFICATION (LEFT BLANK IF STANDARD)

ABM3B-155-12.800MHZ - ☐

PACKAGING
Blank: Bulk
T: 1Kpcs/Reel




ABM3B-155-12.800 MHz

5.0 X 3.2 X 1.1 mm


 **RoHS/RoHS II Compliant**

MSL = N/A: NOT APPLICABLE

MECHANICAL DIMENSIONS: INCHES (mm)

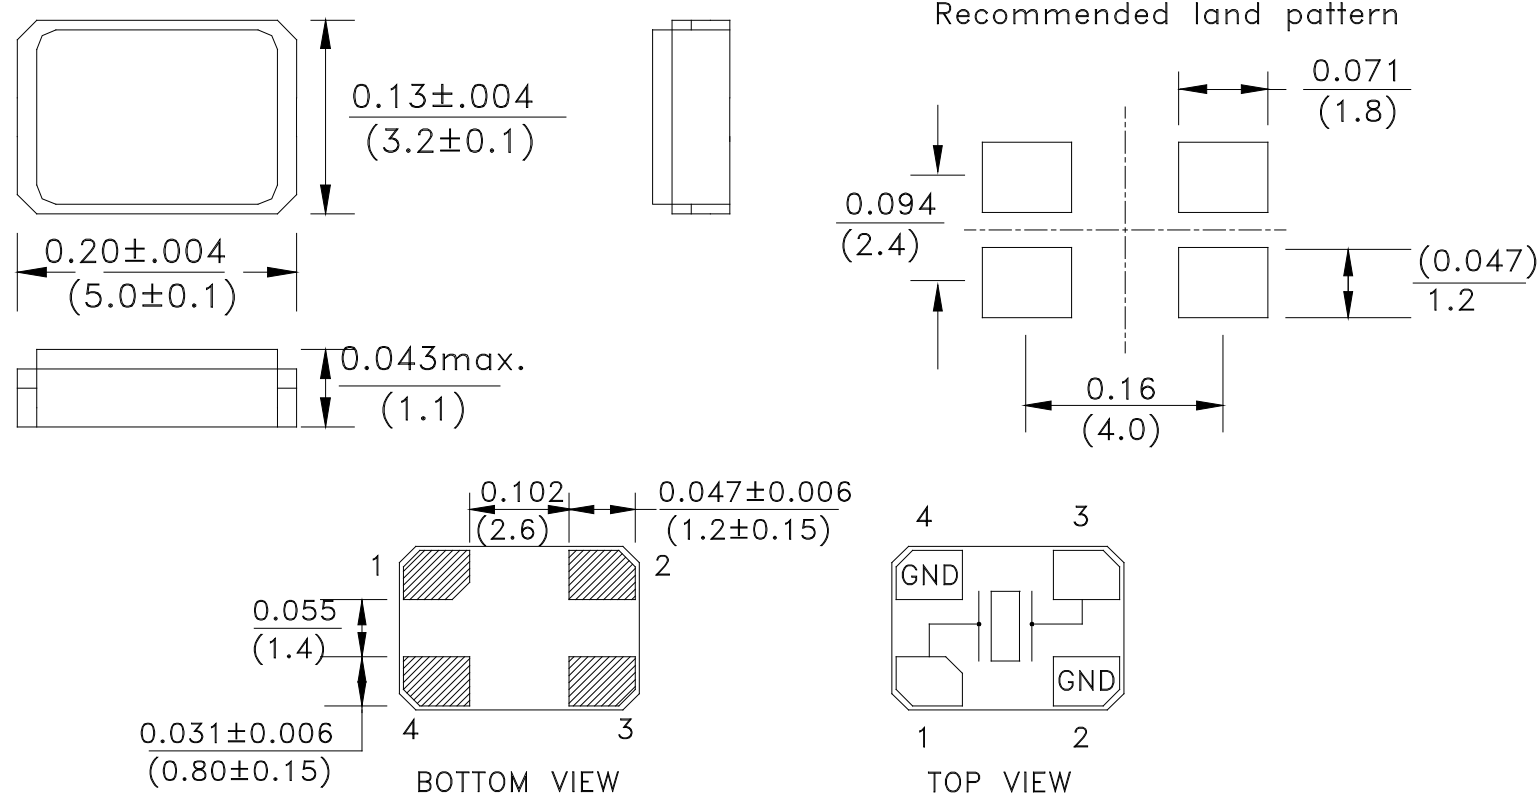

REFLOW PROFILE

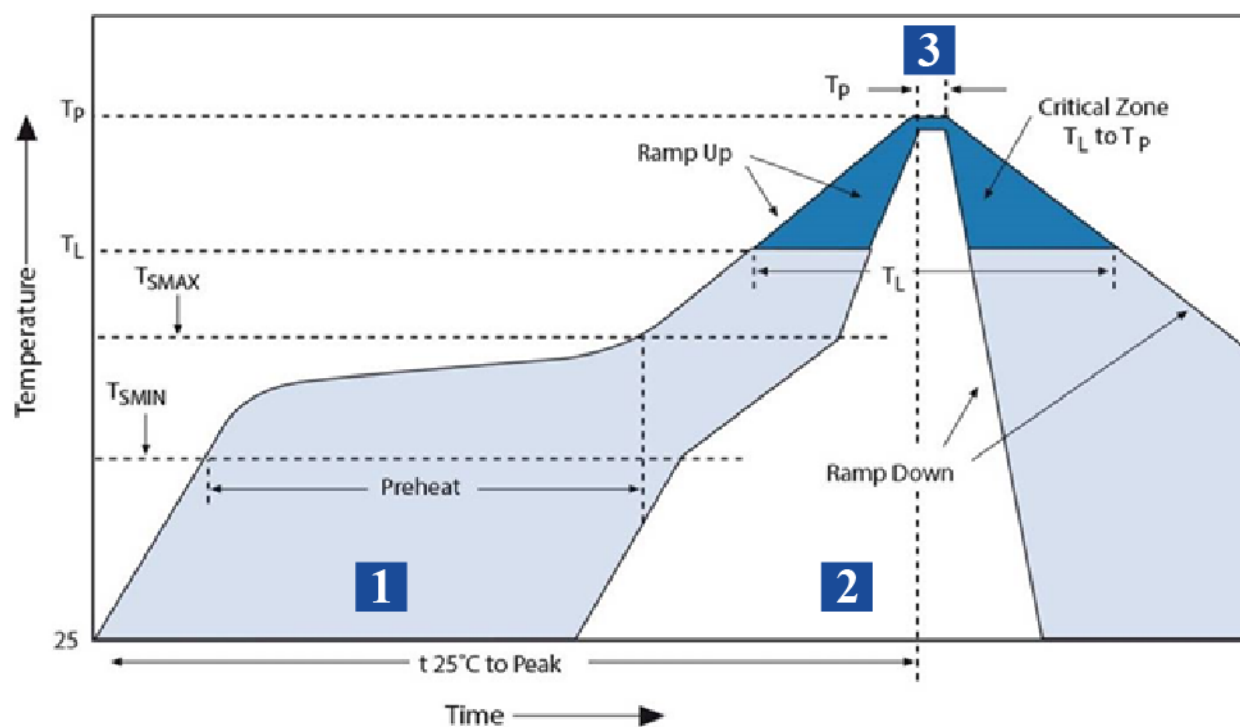

Zone	Description	Temperature	Time
1	Preheat	$T_{\text{SMIN}} \sim T_{\text{SMAX}}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	T_{L} 230°C	30 ~ 40 sec.
3	Peak Heat	T_{P} 260°C	10 sec. MAX

CERAMIC SMD CRYSTAL

ABM3B-155-12.800 MHz



5.0 X 3.2 X 1.1 mm




RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

PACKAGING

TAPE AND REEL: T: 1000PCS/REEL

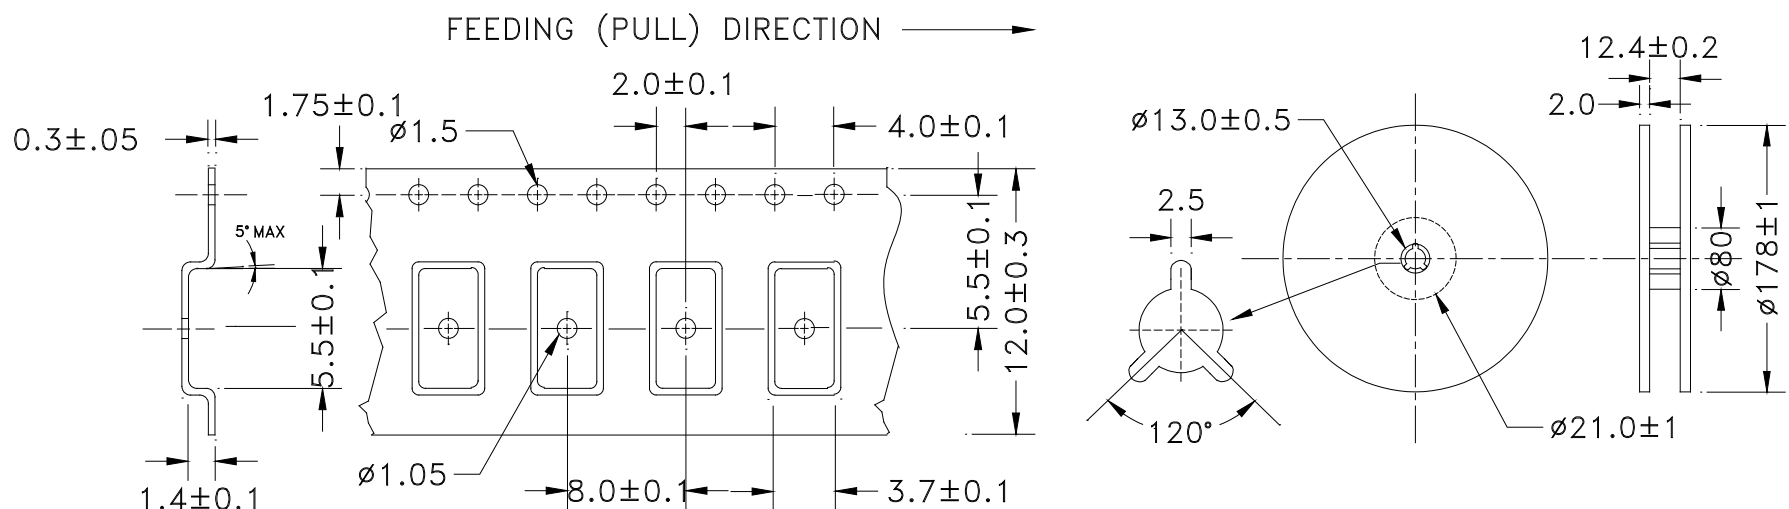

NOTES

1. The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON LLC for more information.
2. ABRACON LLC will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
3. In no case shall ABRACON LLC be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
4. When changing your production process, please notify ABRACON LLC immediately.
5. ABRACON LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON LLC's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON LLC is required. Please contact ABRACON LLC for more information.