



Features:

- Fred chip construction
- Ultra-fast switching, high efficiency
- Low forward voltage drop
- High surge current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

Mechanical Data:

Case	: TO-220AC Type, molded plastic
Terminals	: Pure tin plated, lead free solderable Per MIL-STD-202, method 208
Polarity	: As marked on the body
Weight	: 1.9 grams (approx.)
Mounting Position	: Any
Reverse Voltage	: 200 Volts
Forward Current	: 15 Amperes

Typical Applications

For use in high frequency rectifier of switching mode power supplies, Freewheeling Diode, DC/DC converters or polarity protection application

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	Values	Unit
Max. Recurrent Peak Reverse Voltage	V_{RRM}	200	V
Max. RMS Voltage	V_{RMS}	140	
Max. DC Blocking Voltage	V_{DC}	200	
Max. Average Forward Rectified Current	$I_{F(AV)}$	15	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	200	
Max. Forward Voltage at 15A per leg	V_F	1	V
Max. Reverse Recovery Time (Note1)	T_{RR}	35	nS
Max. DC Reverse Current at $T_J = 25^{\circ}C$ Rated DC Blocking Voltage at $T_J = 100^{\circ}C$	I_R	10 250	μA
Typical Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	70	$^{\circ}C/W$
Typical Thermal Resistance, Junction to Case	$R_{\theta JC}$	3	
Operating Temperature Range	T_J	-55 to +150	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}C$

Notes:

1. Measured With $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$
2. The typical data above is for reference only

Ratings and Characteristic Curves

FIG.1-FORWARD CURRENT DERATING

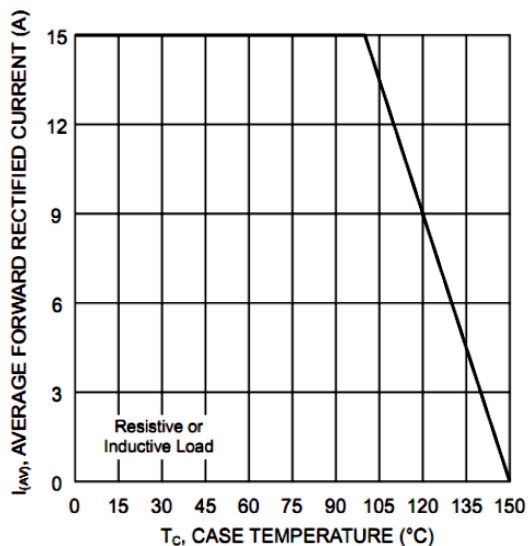


FIG.2-TYPICAL FORWARD CHARACTERISTICS

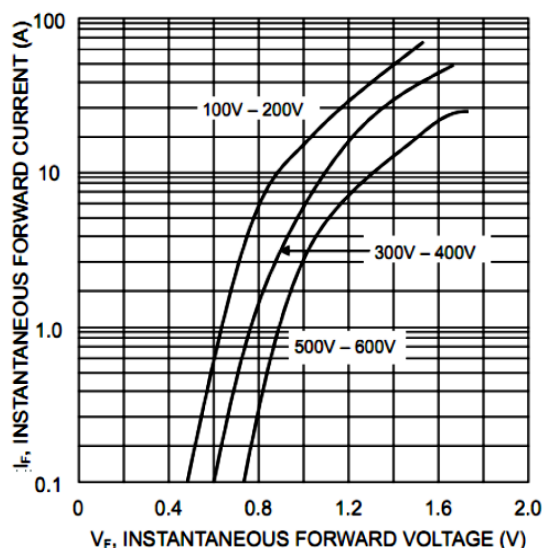


FIG.3-MAXIMUM NON-REPETITIVE PEAK FWD SURGE CURRENT



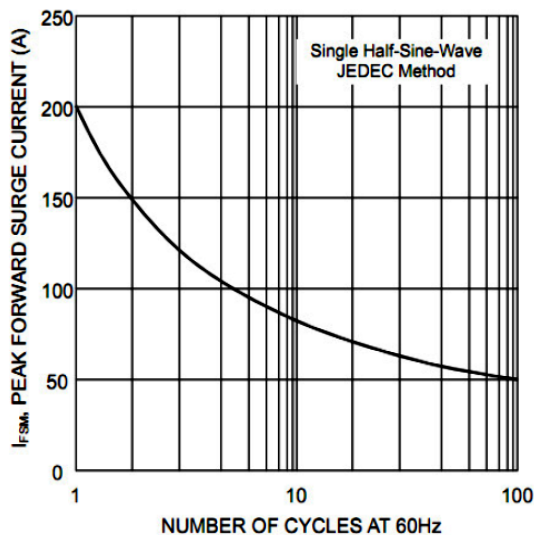


FIG.4-TYPICAL REVERSE CHARACTERISTICS

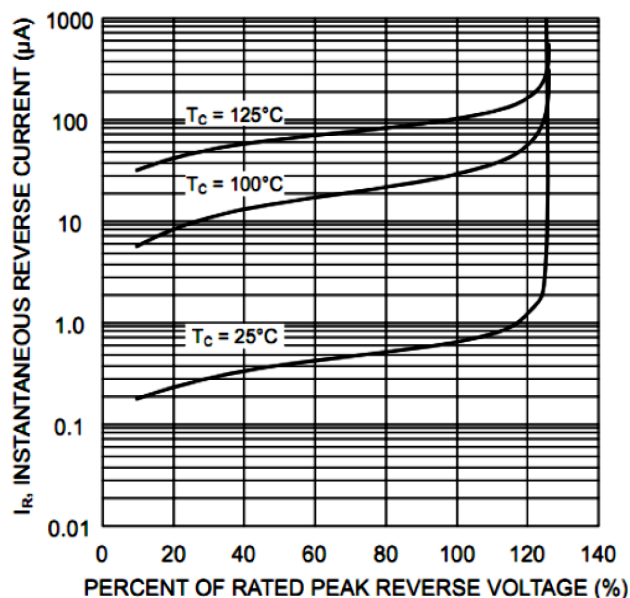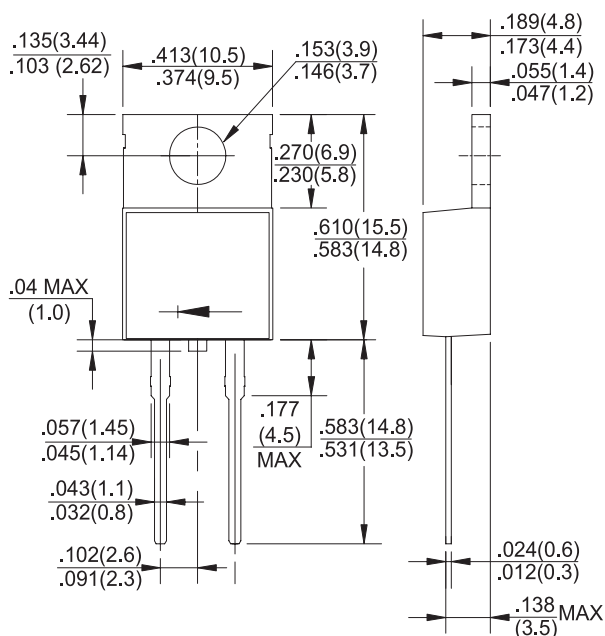

Dimensions:

TO-220AC

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Schottky Barrier Rectifier	MUR1520

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.