

Surface Mount

Super Fast Recover Rectifier

multicompPRO



Features:

- Low reverse leakage
- Glass passivated chip junction
- High forward surge capability
- High temperature soldering guaranteed: 260°C/10s seconds at terminals.

Mechanical Data:

Case	: Molded plastic body
Terminals	: Solder plated
Polarity	: Colour band denotes cathode
Mounting position	: Any
Reverse Voltage	: 50 to 1000 Volts
Forward Current	: 1 Ampere

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Type Number	Symbol	UF1AB	UF1BB	UF1DB	UF1JB	UF1KB	UF1MB	Unit
Max. Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	600	800	1000	V
Max. RMS Voltage	V _{RMS}	35	70	140	420	560	700	
Max. DC Blocking Voltage	V _{DC}	50	100	200	600	800	1000	
Max. Average Forward Rectified Current	I _{F(AV)}	1						A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave	I _{FSM}	30						
Max. Peak Reverse Current Full Cycle @T _A =75°C	I _{R(AV)}	30						
Max. Forward Voltage I _F = 1A	V _F	1			1.7			V
Max. Reverse Current T _A = 25°C	I _R	5						µA
Max. Reverse Recovery Time I _F = 0.5A I _R = 1.0A I _{RR} = 0.25A	T _{RR}	50			75			nS
Type Junction Capacitance V _R = 4.0V, f =1MHz	C _J	15						pF
Typical Thermal Resistance	R _{θJA}	50						°C/W
Operating Temperature Range	T _J	-55 to +150						°C
Storage Temperature Range	T _{STG}							

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Thermal resistance junction to lead.
3. The typical data above is for reference only

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Surface Mount Super Fast Recover Rectifier

multicompPRO

Ratings and Characteristic Curves

FIG. 1 – FORWARD CURRENT DERATING CURVE

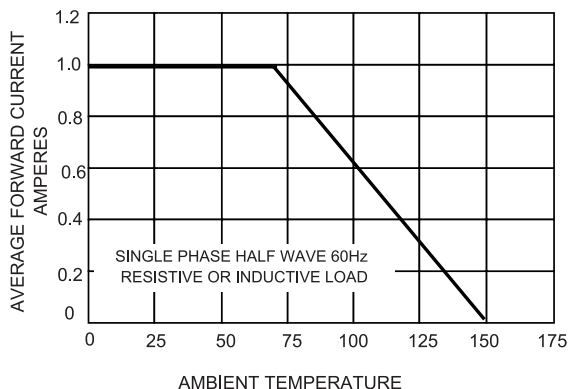


FIG. 2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

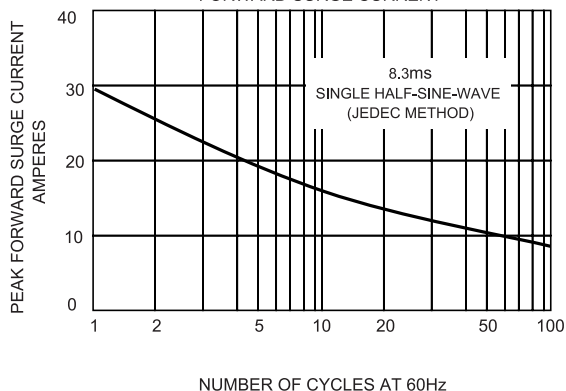


FIG.3 – TYPICAL JUNCTION CAPACITANCE

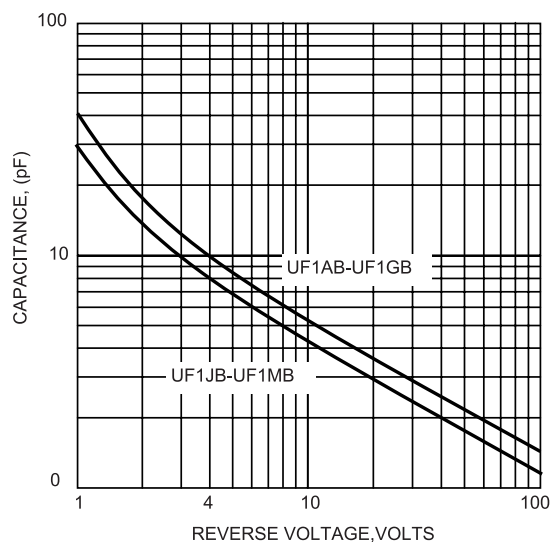


FIG.4-TYPICAL FORWARD CHARACTERISTICS


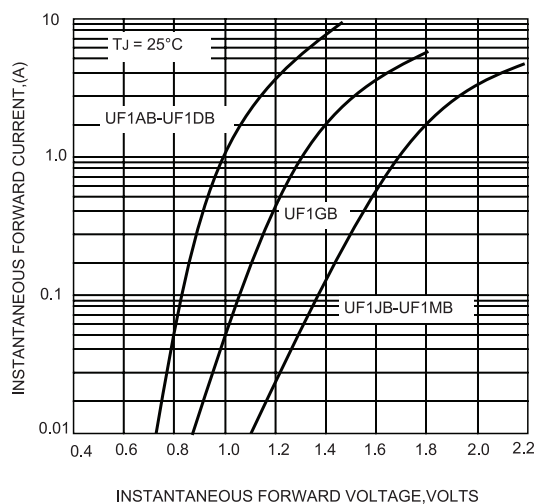


FIG.5-TYPICAL REVERSE CHARACTERISTICS

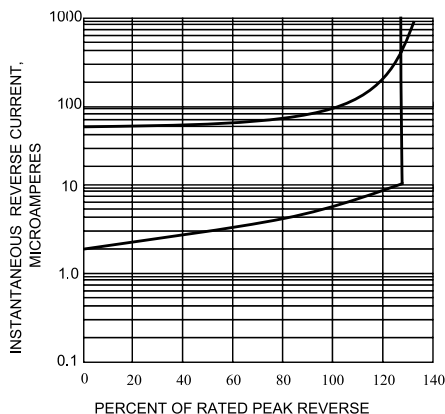


Surface Mount Super Fast Recover Rectifier

multicompPRO

Dimensions:

DO-214AA (SMB)

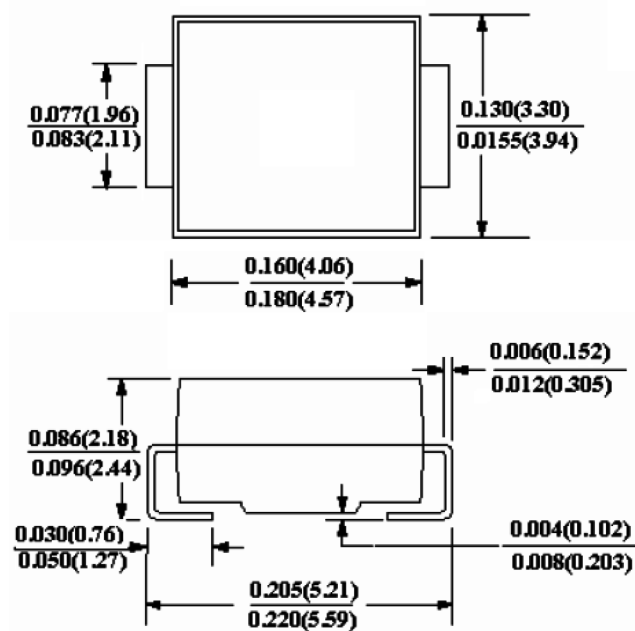

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Surface Mount Super Fast Recover Rectifiers	UF1AB
	UF1BB
	UF1DB
	UF1JB
	UF1KB
	UF1MB

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO