

RoHS
Compliant



Features:

- High efficiency, Low V_F
- High current capability
- High reliability
- High surge current capability
- Low power loss

Mechanical Data

Case	: Moulded plastic
Lead	: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
Polarity	: Colour band denotes cathode end
High temperature soldering guaranteed	: 260°C / 10s / 0.375 Inches, (9.5mm) lead lengths at 5 lbs, (2.3kg) tension
Weight	: 0.34 g

Max. Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60 Hz, resistive or inductive load


For capacitive load, derate current by 20%

Type Number	Symbol	Values	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	V
Maximum RMS Voltage	V_{RMS}	35	
Maximum DC Blocking Voltage	V_{DC}	50	
Maximum Average Forward Rectified Current 0.375 Inches (9.5mm) Lead Length at $T_A = 55^\circ\text{C}$	$I_{(AV)}$	1	A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	30	
Maximum Instantaneous Forward Voltage at 1A	V_F	1.2	V
Maximum Reverse Current at Rated V_R $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	I_R	5 150	μA
Maximum Reverse Recovery Time (Note 1)	T_{RR}	200	nS
Typical Junction Capacitance (Note 2)	C_J	10	pF
Typical Thermal Resistance	$R_{\theta JA}$	65	$^\circ\text{C/W}$
Operating Temperature Range	T_J	-65 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}		$^\circ\text{C}$


Notes : 1. Reverse Recovery Test Conditions: $I_F = 1.0\text{A}$, $V_R = 30\text{V}$, $di/dt = 50\text{A}/\mu\text{S}$, $I_{rr} = 10\%$ IRM for Measurement of trr.
2. Measured at 1MHz and Applied Reverse Voltage of 4V DC
3. Mount on Cu-Pad Size 5mm × 5mm on PCB

Rating and Characteristic Curves


Maximum Forward Current Derating Curve

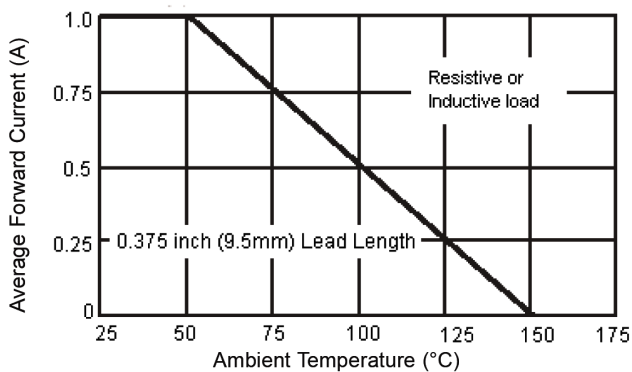


Maximum Non-Repetitive Peak Forward Surge Current

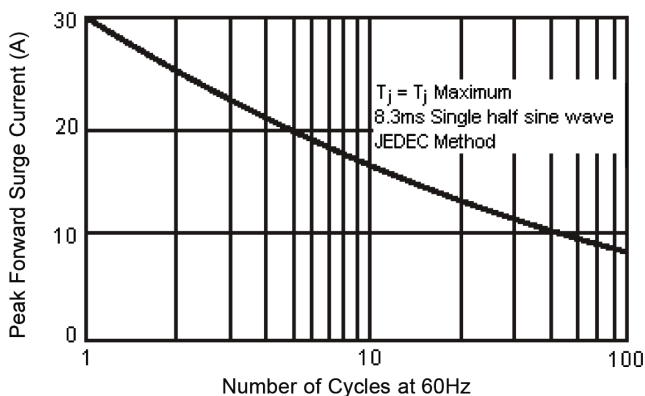


Typical Junction Capacitance

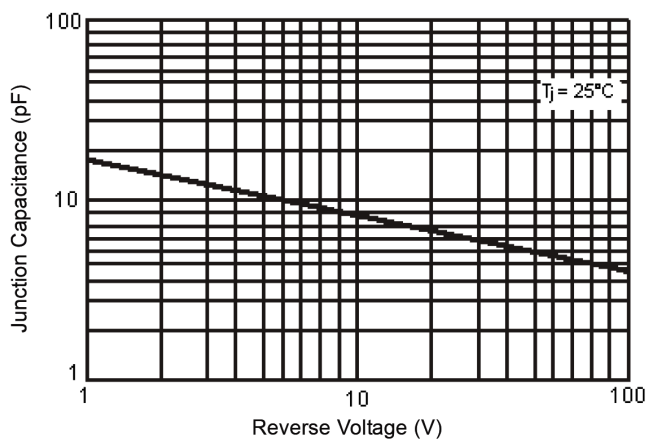


Typical Reverse Characteristics

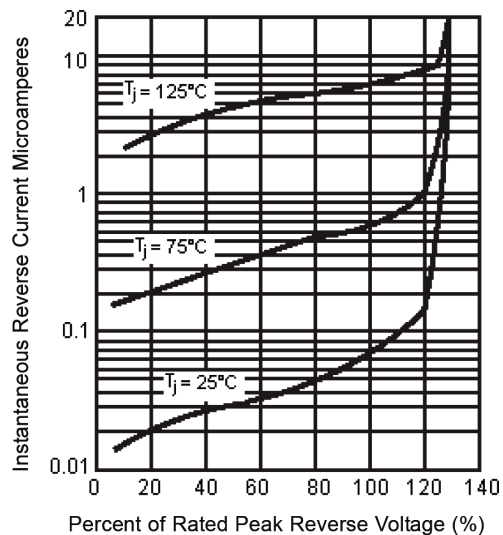


Typical Instantaneous Forward Characteristics

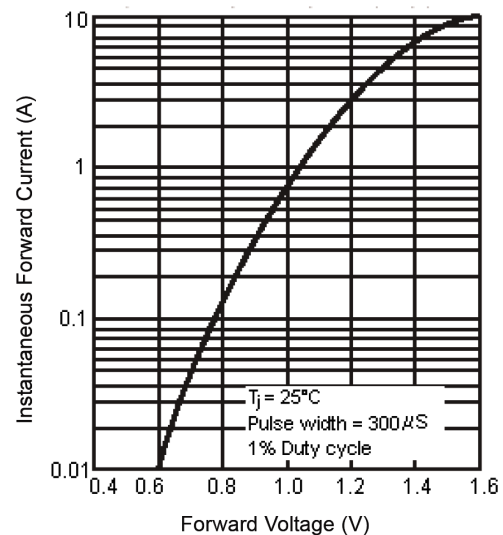

Reverse Recovery Time Characteristic and Test Circuit Diagram

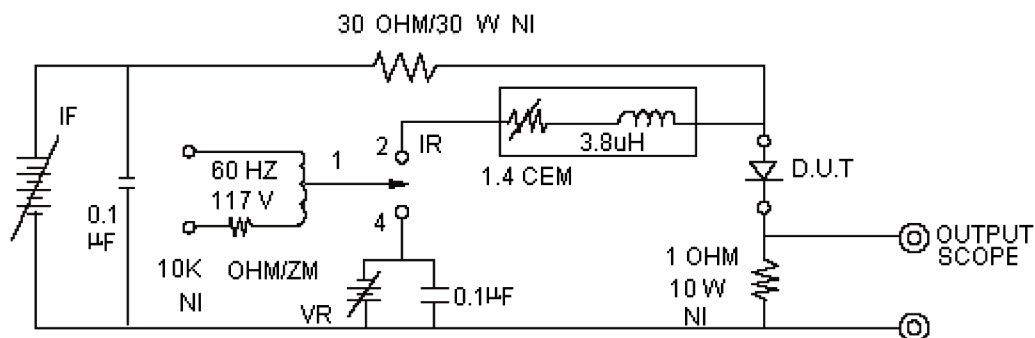

Dimensions:

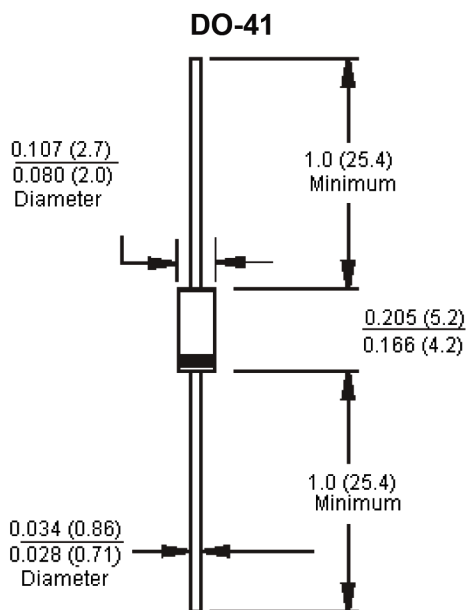

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Standard Recovery Diode, 50V, 1A	1N4933+

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.