

6A Power Diodes

P600 Series

multicompPRO



Features

- High surge current capability
- Void-free plastic in a P600 package
- High current operation 6 Amperes at $T_A = 55^\circ\text{C}$
- Exceeds environmental standards of MIL-S-19500/228

Mechanical Data

Case	: Moulded plastic, P600
Terminals	: Axial leads, solderable per MIL-STD-202, Method 208
Polarity	: Colour band denotes cathode
Mounting Position	: Any
Weight	: 2.1 g

Max. Ratings and Electrical Characteristics

At $T_A = 25^\circ\text{C}$ unless otherwise specified. Single phase, half-wave, 60Hz, resistive or inductive load

All values except maximum RMS voltage are registered JEDEC parameters

Characteristics	P600A+	P600D+	P600G+	P600K+	P600M+	Units
Max. Recurrent Peak Reverse Voltage	50	200	400	800	1,000	V
Max. RMS Voltage	35	140	280	560	700	
Max. DC Blocking Voltage	50	200	400	800	1,000	
Max. Average Forward Rectified Current T _A = 55°C	6					A
Max. Overload Surge Current at 1 Cycle (Note 1)	400					
Max. Forward Voltage at 6A DC	1					V
Max. DC Reverse Current at T _A = 25°C	10					µA
Rated DC Blocking Voltage at T _A = 100°C	1					mA DC
Typical Junction Capacitance (Note 3) C _J	150					pF
Typical Thermal Resistance (Note 2) R _{θJA}	20					°C / W
Typical Thermal Resistance (Note 2) R _{θJL}	4					
Operating Temperature Range	-55 to 150					°C
Storage Temperature Range						

Notes

1. Peak forward surge current, per 8.3 ms single half-sine-wave superimposed on rated load (JEDEC method)
2. Thermal resistance from junction to ambient and from junction to lead at 0.375 inches (9.5 mm) lead length PCB mounted with 1.1×1.1 inches (30mm $\times$ 30mm) copper pads
3. Measured at 1 MHz and applied reverse voltage of 4 volts

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

6A Power Diodes

P600 Series

multicompPRO

Rating and Characteristic Curves

Fig. 1-Typical Reverse Characteristics

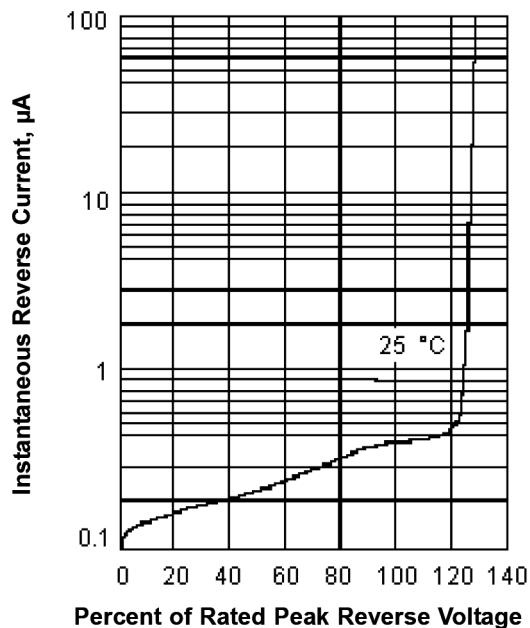


Fig. 2-Forward Derating Curve

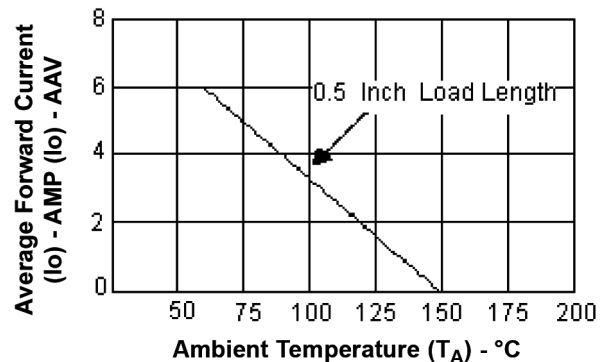


Fig. 4-Typical Instantaneous Forward Characteristics

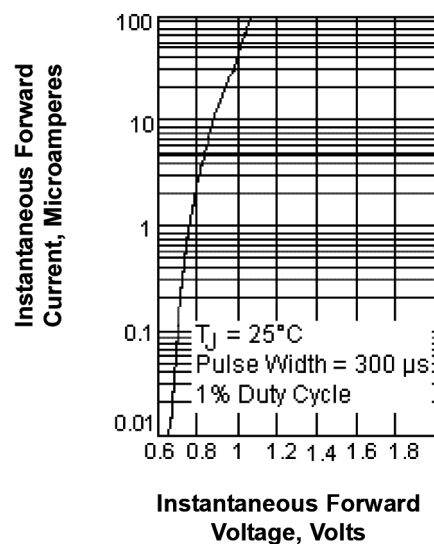


Fig. 3-Typical Transient Thermal Impedance


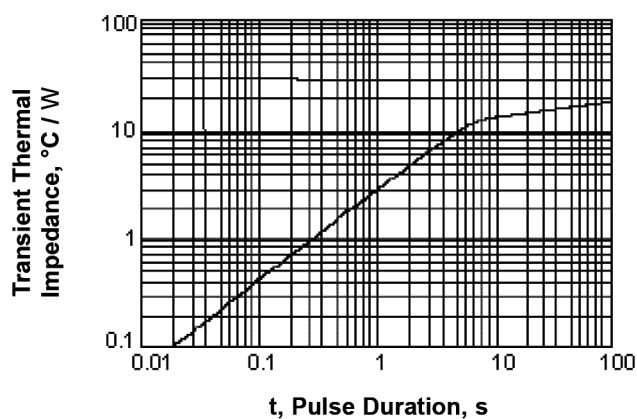


Fig. 5-Maximum Overload Surge Current

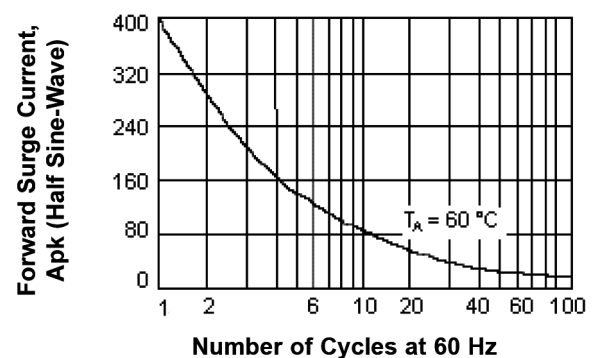


6A Power Diodes

P600 Series

multicompPRO

Dimensions

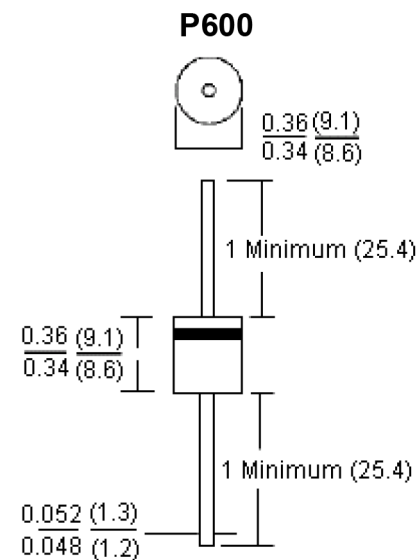

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Standard Recovery Diode, 50V, 6 A, Single, 1V, 400 A	P600A+
Standard Recovery Diode, 200V, 6 A, Single, 1V, 400 A	P600D+
Standard Recovery Diode, 400V, 6 A, Single, 1V, 400 A	P600G+
Standard Power Diode, 800V, 6 A, Single, 1.35 V, 400 A	P600K+
Standard Recovery Diode, 1kV, 6 A, Single, 1 V, 400 A	P600M+

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO