

ECASD61B476M020K00

indicates a package specification code.



< List of part numbers with package codes >
ECASD61B476M020K00

Shape

L size	7.3 ±0.3mm
W size	4.3 ±0.2mm
T size	2.8 ±0.3mm
W1 size (max.)	2.4±0.2mm
S size	1.3±0.2mm
Size code in inch(mm)	2917(7343)

References

Packaging	Specifications	Minimum quantity
K	φ330mm Embossed taping	2500

Mass (typ.)	
1 piece	0.20g


Specifications

ESR (equivalent series resistance)	20mΩ
Capacitance	47μF ±20%
Rated voltage	12.5Vdc
Capacitance change rate	±20%
Operating temperature range	-40~105°C
Allowable Ripple Current	2.0 Arms
Leakage Current	58.8 μA


⚠ Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


Frequency Characteristic|Z|

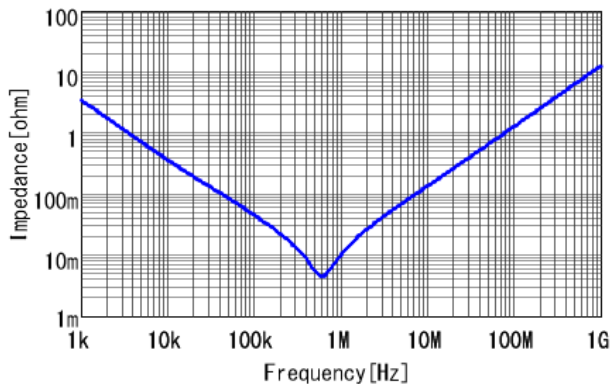


Frequency CharacteristicR

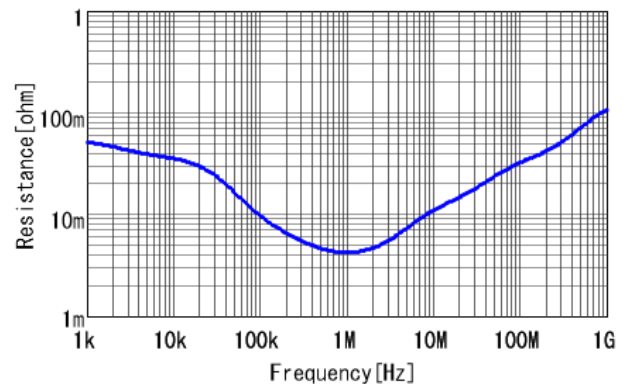


DC bias characteristics

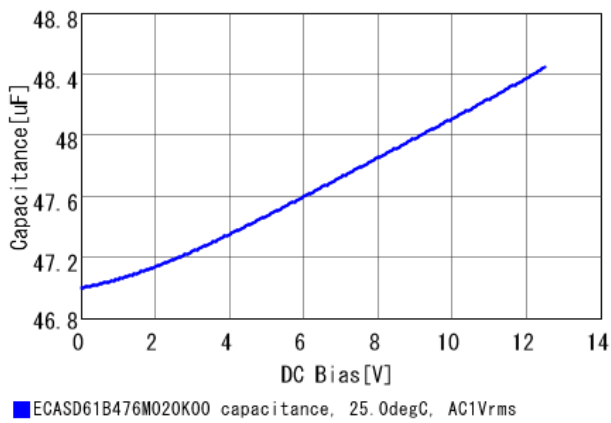


AC Voltage Characteristics

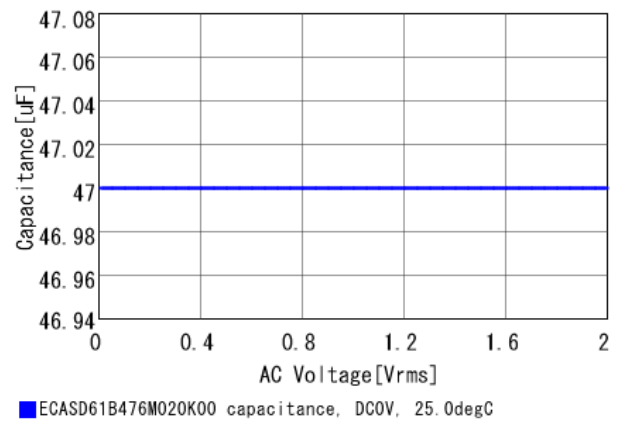

Temperature Characteristics

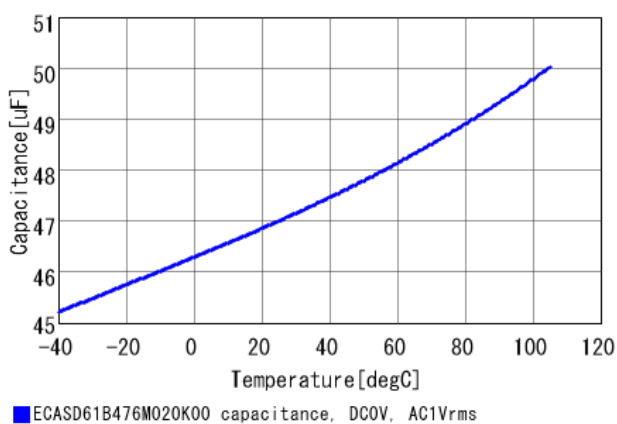

S Parameter S21

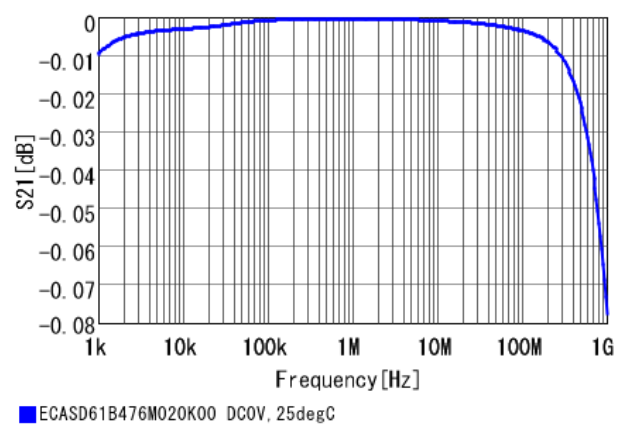

⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.