
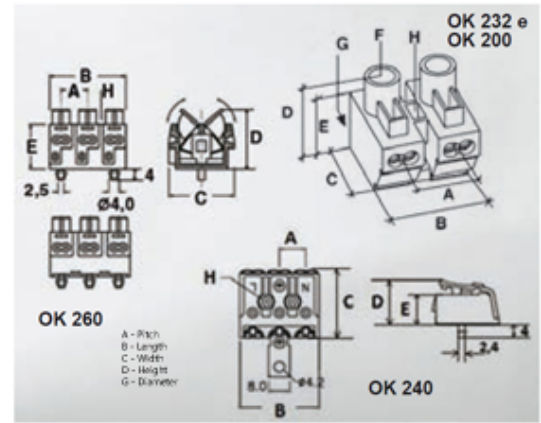


HY200/12 FVSP

12 pole polyamide PA6.6 screw to pushwire pillar block 10mm pitch 32a 450v

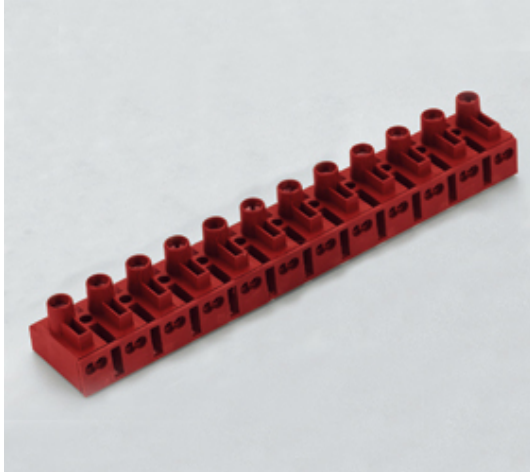

SPECIFICATION

Number of Poles	12
Terminal Material	Nickel plated steel
Body Material	Polyamide PA6.6
UL94 Rating	UL94V0
Max Conductor Size (Sq mm)	1.5/4
Max Current (A)	32
Max Voltage (V)	450
Working Temperature	150
Pitch (mm)	10
Height (mm)	16.2
Width (mm)	20.4
Length (mm)	117
Diameter (mm)	2.8
Comments	without foot
Terminal Screw Material	White zinc plated steel