

**RoHS
Compliant**



Features

- Glass Passivated Die Construction
- Ideally Suited for Automatic Assembly
- Low Forward Voltage Drop
- Low Power Loss
- Ultra-Fast Recovery Time
- Plastic Case Material has UL Flammability Classification Rating 94V-0

Mechanical Data

Case	: SMB/DO-214AA, Molded Plastic
Terminals	: Solder Plated, Solderable per MIL-STD-750, Method 2026
Polarity	: Cathode Band or Cathode Notch
Forward Current	: 1 Amperes
Marking	: Type Number
Weight	: 0.093 grams(approx)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Characteristics	Symbol	MURS120+	MURS160+	Units
Peak Repetitive Reverse Voltage	V_{RRM}	200	600	V
Working Peak Reverse Voltage	V_{RMS}	200	600	
DC Blocking Voltage	V_R	200	600	
RMS Reverse Voltage	$V_{R(RMS)}$	140	420	
Average Rectified Output Current @ $T_L = 90^\circ\text{C}$	I_O	1		A
Non-Repetitive Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	40	35	
Forward Voltage @ $I_F = 1\text{A}$	V_F	0.875	1.25	V
Maximum Reverse Current at Rated DC Blocking Voltage $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	I_R	2 250	5 250	μA
Reverse Recovery Time (Note1)	t_{rr}	25	50	ns
Typical Junction Capacitance(Note2)	C_J	13		pF
Typical Thermal Resistance(Note3)	$R_{\theta JA}$	15		W/°C
Operating Temperature Range	T_J	-55 to +150		°C
Storage Temperature Range	T_{STG}			

Note:

1. Measured With $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
2. Measured at 1 MHz and applied reverse voltage of 4V DC.
3. Mounted on P.C. Board with 8mm² land area.
4. The typical data above is for reference only

Rating and Characteristic Curves

FIG.1 - FORWARD SURGE CURRENT DERATING CURVE

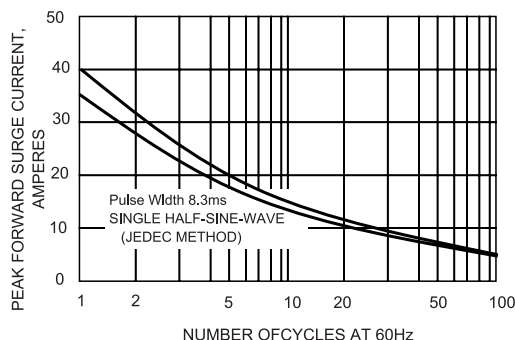


FIG.2 - FORWARD CURRENT DERATING CURVE

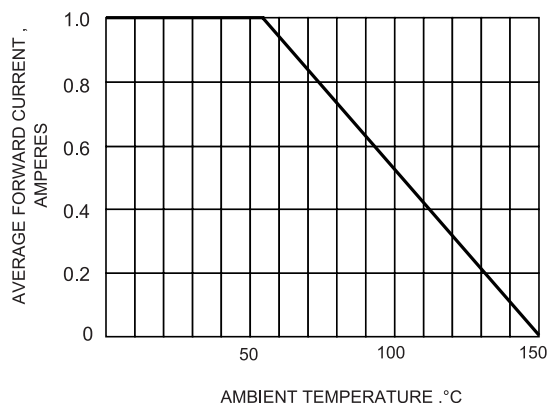


FIG.3-TYPICAL FORWARD CHARACTERISTICS

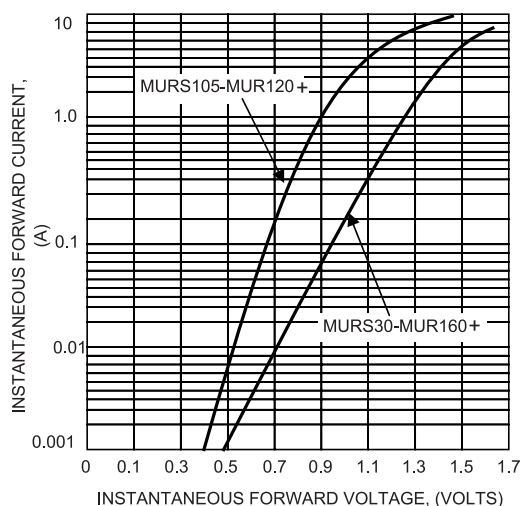


FIG.4-TYPICAL JUNCTION CAPACITANCE



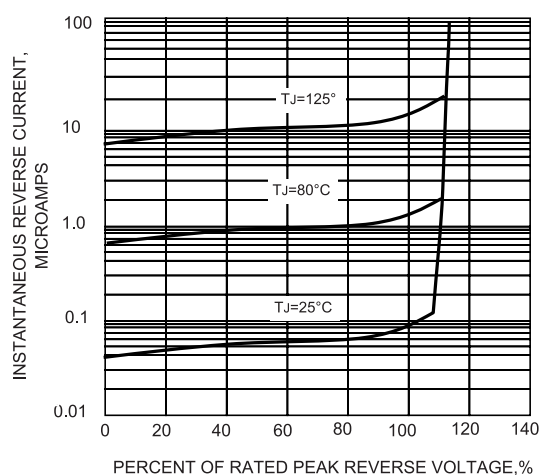


FIG.5 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT

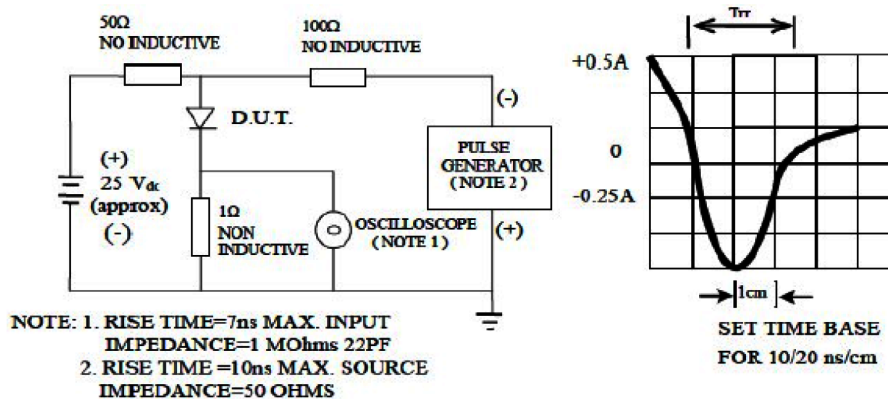

Dimensions:

SMB/DO-214AA

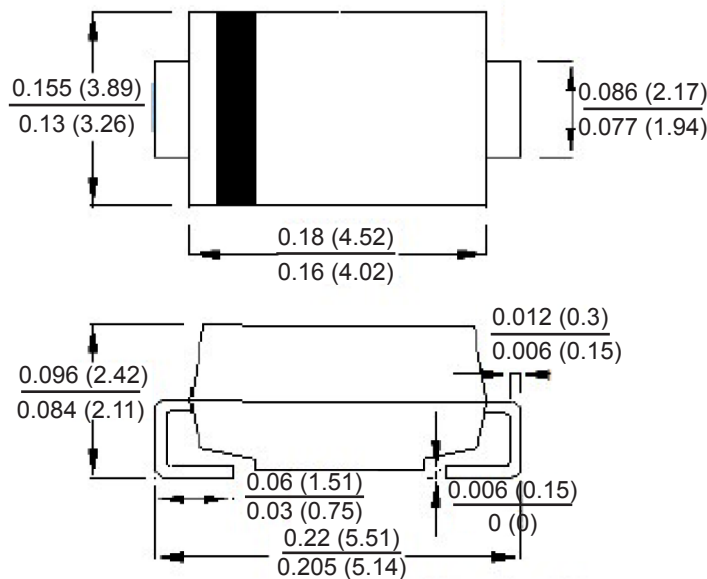

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Rectifiers, 1A 200V SMB	MURS120+
Rectifiers, 1A 600V SMB	MURS160+

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.