


Piezo Transducer

multicompPRO


Panel Mount - Wire Lead Type

AC Devices (requires external circuitry to generate sound)


ABT-422-RC

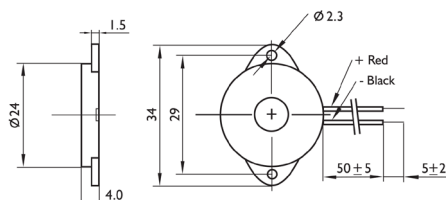

ABT-431-RC

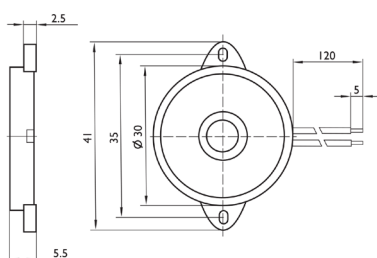

ABT-438-RC

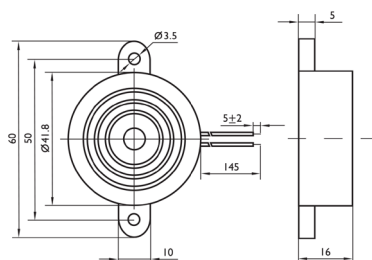

Dimensions : Millimetres
Tolerance: $\pm 0.5\text{mm}$

Specifications

Part Number	ABT-422-RC	ABT-431-RC	ABT-438-RC
Rated Voltage (Vp-p square wave)	15Vp-p	9Vp-p	12Vp-p
Operating Voltage	1 - 30Vp-p	1 - 30Vp-p	1 - 30Vp-p
Rated Current	$\leq 8\text{mA}$	$\leq 3\text{mA}$	3mA
Sound Output level	$\geq 90\text{dB @30cm}$	$\geq 88\text{dB @10cm}$	$\geq 90\text{dB @30cm}$
Resonant Frequency	5500Hz $\pm 700\text{Hz}$	3500Hz $\pm 500\text{Hz}$	2800Hz ± 500
Capacitance	18000pF $\pm 30\%\text{pF}$	20000pF $\pm 30\%\text{pF}$	35000pF $\pm 30\%$
Tone	Continuous		
Housing Material	Black ABS	Black ABS	Black ABS
Operating Temperature	-20°C to +70°C	-20°C to +60°C	-20°C to +60°C
Storage Temperature	-30°C to +80°C	-30°C to +70°C	-30°C to +70°C
Lead Wire	UL1571 AWG32	UL1905 AWG28	UL1007 AWG28
Lead Length	50mm	120mm	145mm
Weight	3g	3.5g	10g


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO


Through Hole Type

AC Devices (requires external circuitry to generate sound)


ABT-402-RC

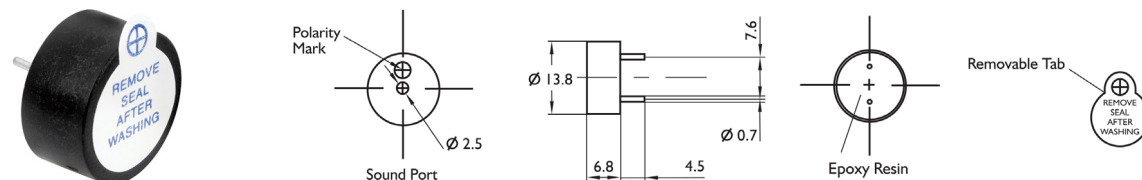

ABT-405-RC

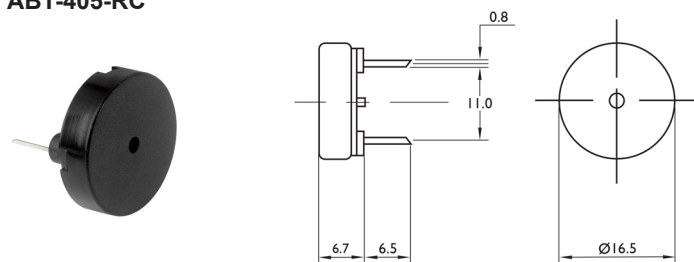

ABT-430-RC

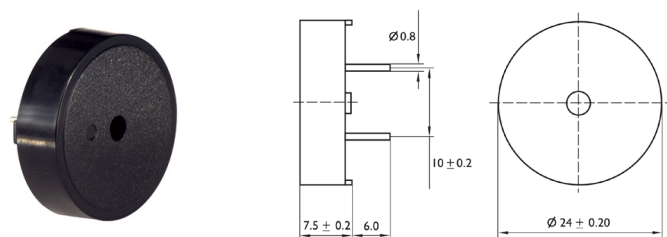


Dimensions : Millimetres
Tolerance: ±0.5mm


Specifications

Part Number	ABT-402-RC	ABT-405-RC	ABT-430-RC
Rated Voltage (Vp-p square wave)	5Vp-p	3Vp-p	9Vp-p
Operating Voltage	1 - 20Vp-p	1 - 30Vp-p	1 - 30Vp-p
Rated Current	≤ 1mA	≤ 1mA	≤ 3mA
Sound Output level	≥ 80dB @10cm	≥ 75dB @10cm	≥ 85dB @10cm
Resonant Frequency	4000Hz ±500Hz	4000Hz ±500Hz	4000Hz ±500Hz
Capacitance	13000pF ±30%pF	10000pF ±30%pF	17000pF ±30%pF
Tone	Continuous		
Housing Material	-	Black Noryl	Black ABS
Operating Temperature	-20°C to +70°C	-20°C to +70°C	-20°C to +60°C
Storage Temperature	-30°C to +80°C	-30°C to +80°C	-30°C to +70°C
Pin Pitch	7.6mm	11mm	10mm
Weight	1g	1g	3g

ABT-436-RC

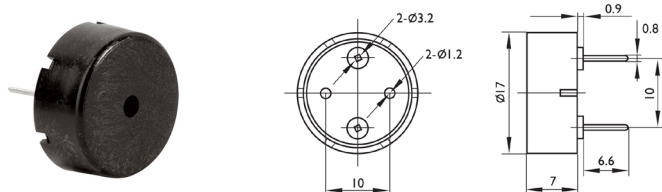

ABT-451-RC

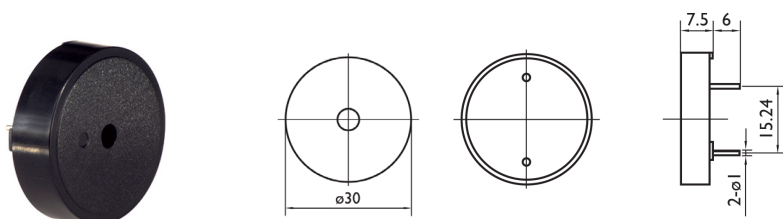


Dimensions : Millimetres
Tolerance: ±0.5mm

Specifications

Part Number	ABT-436-RC	ABT-451-RC
Rated Voltage (Vp-p square wave)	5Vp-p	10Vp-p
Operating Voltage	1 - 30Vp-p	1 - 30Vp-p
Rated Current	≤ 1mA	≤ 3mA
Sound Output level	≥ 78dB @10cm	≥ 90dB @10cm
Resonant Frequency	4000Hz ±500Hz	2800Hz ±500Hz
Capacitance	15000pF ±30%pF	-
Tone	Continuous	
Housing Material	Black Noryl	Black ABS
Operating Temperature	-20°C to +70°C	-20°C to +60°C
Storage Temperature	-30°C to +80°C	-30°C to +70°C
Pin Pitch	10mm	15.24mm
Weight	1g	2g

Through Hole & Wire Lead Type

AC Devices (requires external circuitry to generate sound)

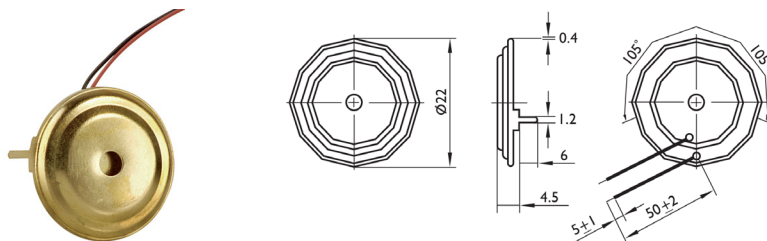


Dimensions : Millimetres
Tolerance: $\pm 0.5\text{mm}$

Specifications

Part Number	ABT-440-RC
Rated Voltage (Vp-p square wave)	15Vp-p
Operating Voltage	1 - 30Vp-p
Rated Current	$\leq 5\text{mA}$
Sound Output level	$\geq 90\text{dB @}10\text{cm}$
Resonant Frequency	4300Hz $\pm 500\text{Hz}$
Tone	Continuous
Housing Material	Brass
Operating Temperature	-20°C to +60°C
Storage Temperature	-30°C to +70°C
Lead Wire	UL1571 AWG32
Lead Length	50mm
Weight	2g

Wire Lead Type

AC Devices (requires external circuitry to generate sound)

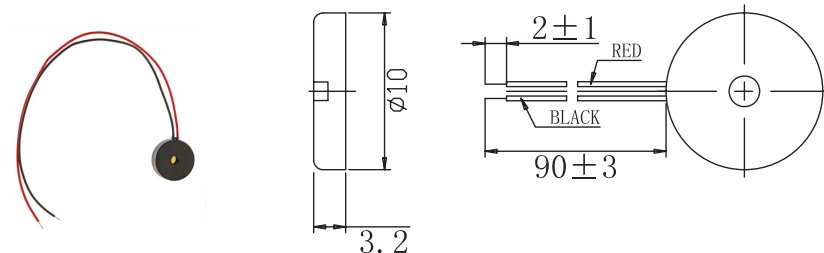

Dimensions : Millimetres
Tolerance: $\pm 0.5\text{mm}$

Specifications

Part Number	ABT-459-RC
Rated Voltage (Vp-p square wave)	10Vp-p
Operating Voltage	1 - 30Vp-p
Rated Current	$\leq 5\text{mA}$
Sound Output level	$\geq 80\text{dB @}10\text{cm}$
Resonant Frequency	3200Hz $\pm 500\text{Hz}$
Capacitance	11000pF $\pm 30\%\text{pF}$
Housing Material	Black ABS
Operating Temperature	-20°C to +60°C
Storage Temperature	-30°C to +70°C
Lead Wire	UL1571 AWG32
Lead Length	90mm
Weight	1g

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.