

RoHS
Compliant



Description

The product is 5A printed board mounted solid state relay. Control voltage is 4 ~ 32VDC. Opto-isolation is 4000VACrms. With high EMC and high inrush current capability.

Features

- Ratings from 0.1A to 5A @ 48-530VAC
- Control voltage: 4-15VDC, 4-32VDC
- PCB mounted
- Opto-isolation: $\geq 4000\text{VACrms}$
- High EMC capability
- High inrush current

Applications

Suitable for important industrial applications such as lighting control, motor control, ATM, medical device, elevator, and auto door

Technical Specification

Input Circuit

Control Voltage Range (-L & -W)	: 4V DC to 15V DC & 4V DC to 32V DC
Min. Turn-On Voltage (-L & -W)	: 4V DC
Min. Turn-Off Voltage	: 1V DC
Max. Input Current (-L & -W)	: 25mA & 20mA

Output Circuit


Load Voltage Range	: 48 ~ 280V AC
Transient Overvoltage	: 600Vpk
Load Current Range	: 0.1 ~ 5A
Max. Turn-On Time	
Zero Crossing	: 1/2AC Cycle + 1ms
Max. Turn-off Time	: 1/2AC Cycle + 1ms
Max. Surge Current (@10 ms) (5A)	: 200A
Max. Off-State Leakage Current [@ Rated Voltage]	: 1mA
Max. On-State Voltage Drop [@ Rated Current]	: 1.5Vrms
Min. Off-State dv/dt[@Maximum Rated Voltage]	: 200V/ μs

General Information

Dielectric Strength Input/Output (50/60Hz)	: $\geq 4000\text{Vrms}$
Ambient Operating Temperature Range	: -30°C to +80°C
Ambient Storage Temperature Range	: -30°C to +100°C
Weight (Typical)	: 16g


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

Diagram

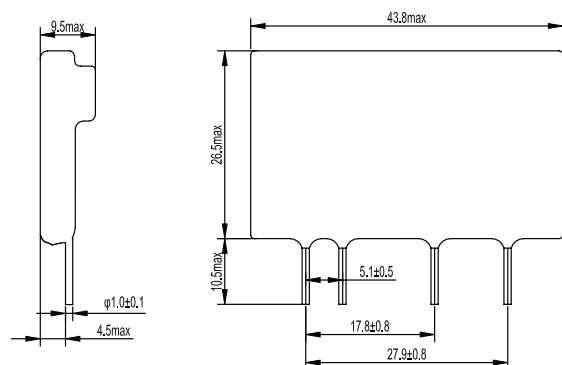


Dimensions : Millimetres

Wiring Diagram

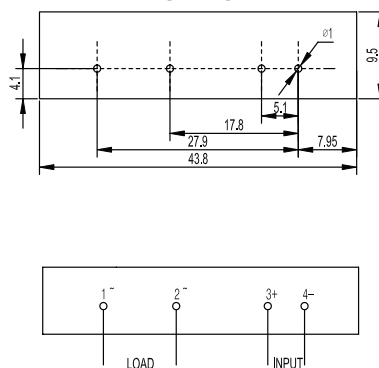

Thermal Curve

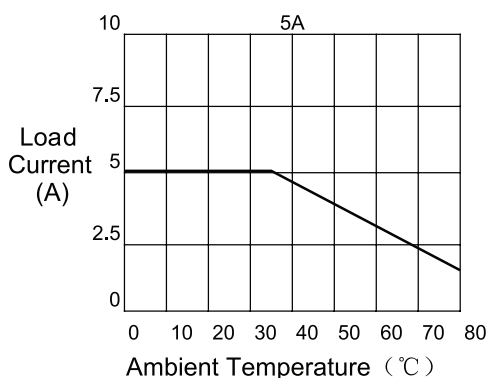

Part Number Explanation

MCKSD

MCKSD
Series

240

Load Voltage
240: 240V AC

D

Control Voltage
D: DC Control

5

Load Current
5: 5 Amp

-L/W

Other
L: 4-15V DC
W: 4-32V DC

Part Number Table

Description	Part Number
SSR, 5A, 240VAC, 4-15V DC	MCKSD240D5-L
SSR, 5A, 24 - 280V AC, 4-32V DC	MCKSD240D5-W

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.