

# Data sheet

## RP018xxVBLC Type 262

Page 1/6

P/N


312621xx

xx=number of poles


2026/03/24

Version: G

## Illustrations

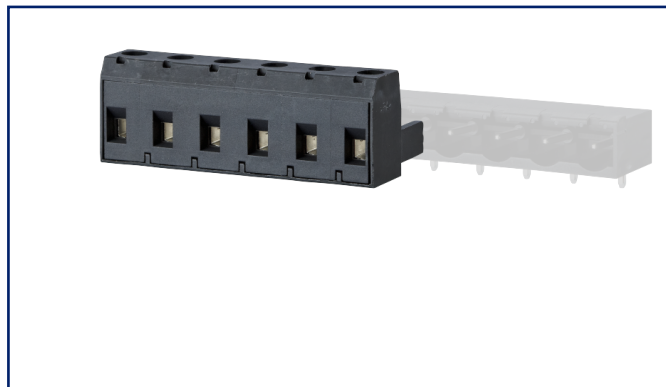

Dimensional drawing as an example

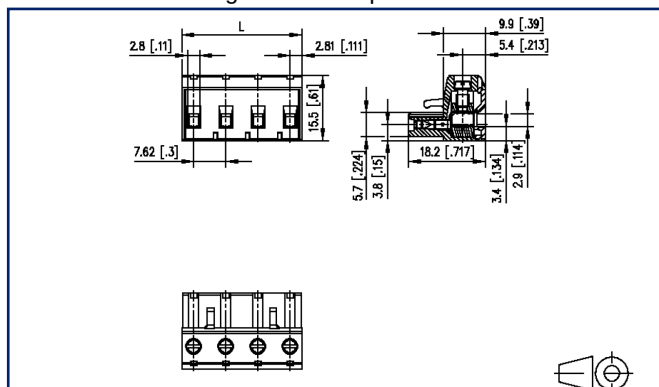

See enlarged drawings at the end of document

## Product specification

- screw type terminal block, pluggable
- centerline 7.62 mm, direction of connection vertical 0°
- lift system, fittable without loss of poles
- color black
- wire entry codeable side perpendicular to plug direction



# Data sheet

## RP018xxVBLC Type 262

Page 2/6

P/N  
312621xx

xx=number of poles

2026/03/24

Version: G

### Technical Data

#### General Data

|                           |           |        |        |
|---------------------------|-----------|--------|--------|
| Tightening torque SEV     | 0.5 Nm    |        |        |
| Tightening torque UL      | 4.4 lb-in |        |        |
| min. number of poles      | 2         |        |        |
| max. number of poles      | 12        |        |        |
| Insulating material class | CTI 600   |        |        |
| clearance/creepage dist.  | 6.1 mm    |        |        |
| Protection category       | IP20      |        |        |
| Insul. strip length       | 8 mm      |        |        |
| Rated current             | 13.5 A    |        |        |
| Overvoltage category      | III       | III    | II     |
| Pollution degree          | 3         | 2      | 2      |
| Rated voltage             | 400 V     | 1000 V | 1000 V |
| Rated test voltage        | 6 kV      | 6 kV   | 6 kV   |

#### Terminal data

|                          |                                                              |
|--------------------------|--------------------------------------------------------------|
| rat.wiring solid AWGmax  | 0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12 |
| rat.wiring strand.AWGmax | 0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12 |

#### Approvals

|                    |                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------|
| extended wiring UL | 2 AWG 16-18, or 1 AWG 16 stranded with 1 AWG 18 solid, or 1 AWG 16 stranded with 1 AWG 18 stranded (up to 12 A) |
|--------------------|-----------------------------------------------------------------------------------------------------------------|



V / A / AWG

300 / 15 / 28 - 12

approval UL - File No.

E121004



500 V / 6 kV / 13.5 A

#### Material

|                        |        |
|------------------------|--------|
| insulating material    | PA66   |
| flammability class     | V0     |
| contact material       | CuSn   |
| Contact surface        | Sn     |
| terminal body thread   | M3     |
| terminal body material | CuZnPb |
| terminal body surface  | Ni     |



# Data sheet

## RP018xxVBLC Type 262

Page 3/6

P/N  
312621xx

xx=number of poles

2026/03/24

Version: G

### Technical Data

|                             |                               |
|-----------------------------|-------------------------------|
| screw thread                | M3                            |
| screw material              | 8,8                           |
| screw surface               | Zn Cr(VI)-frei/free           |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 |

### Climatic Data

|                         |        |
|-------------------------|--------|
| upper limit temperature | 105 °C |
| lower limit temperature | -40 °C |

### general

|           |              |
|-----------|--------------|
| Tolerance | ISO 2768 -mH |
|-----------|--------------|

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet  
RP018xxVBLC Type 262

Page 4/6

P/N  
312621xx  
xx=number of poles  
2026/03/24  
Version: G

## Accessories

| P/N         | Designation                                     |
|-------------|-------------------------------------------------|
| 700025-01-9 | Coding star white with a group of 6 coding pins |



Data sheet

Page 5/6

**RP018xxVBLC Type 262**

P/N

**312621xx****xx=number of poles**

2026/03/24

Version: G

**Counterpart**

| P/N         | Designation |
|-------------|-------------|
| PR118XXHBBN | PR118xxHBBN |
| PR118XXVBBN | PR118xxVBBN |



## Data sheet

## RP018xxVBLC Type 262

Page 6/6

P/N

312621xx


xx=number of poles

2026/03/24

Version: G

## Illustrations

Dimensional drawing as an example

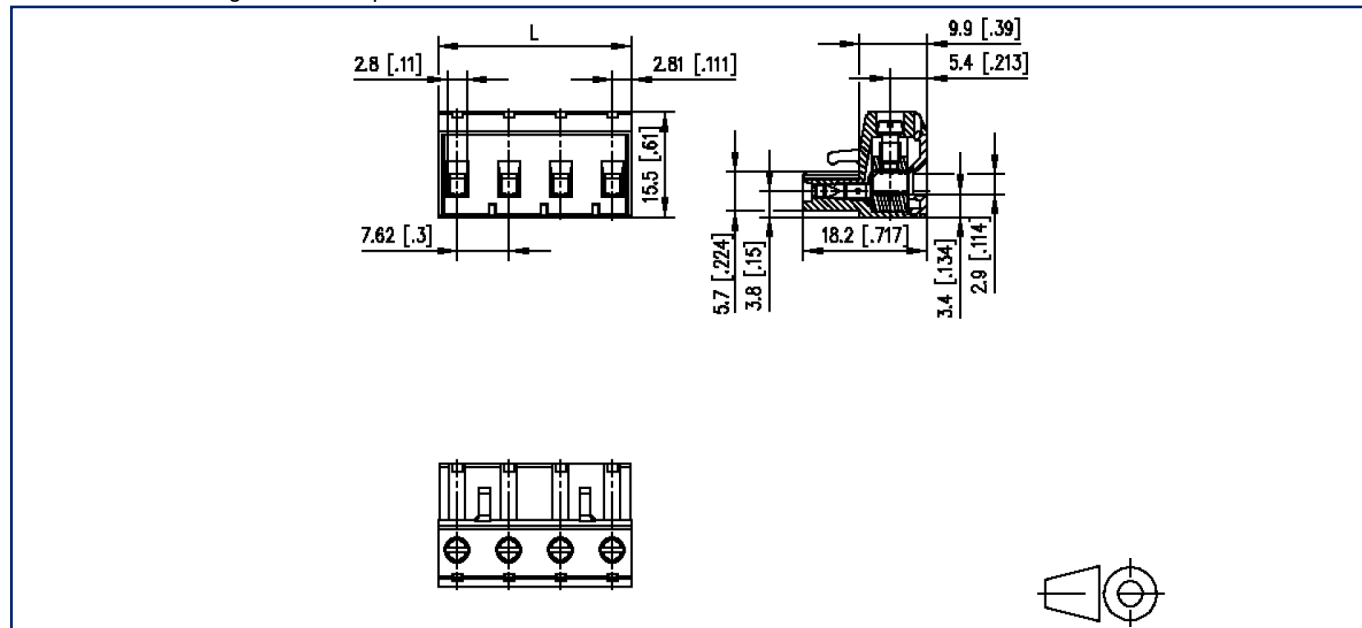

$L = (\text{pole size} - 1) \times \text{centerline} + 5.62 \text{ mm} [0.221]$