

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Solder/Slip-on connection, Color: green, contact surface: Tin, mounting: Direct mounting, accessory order no. 5030172 can only be used in conjunction with MSTB 2,5/...ST and MSTBT 2,5/...ST.

The figure shows a 10-position version of the product

### Why buy this product

- ✓ Cable connection on the inside of the device enables flexible positioning of the panel feed-through
- ✓ Free choice – permanent solder connection or standardized slip-on connection
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies



### Key Commercial Data

|                                      |                                                                                      |
|--------------------------------------|--------------------------------------------------------------------------------------|
| Packing unit                         | 50 STK                                                                               |
| Minimum order quantity               | 50 STK                                                                               |
| GTIN                                 |  |
| GTIN                                 | 4017918003876                                                                        |
| Weight per Piece (excluding packing) | 3.050 g                                                                              |
| Custom tariff number                 | 85366990                                                                             |
| Country of origin                    | Germany                                                                              |

### Technical data

#### Dimensions

|                                  |              |
|----------------------------------|--------------|
| Length [ l ]                     | 17.5 mm      |
| Width [ w ]                      | 30.00 mm     |
| Height [ h ]                     | 29.5 mm      |
| Pitch                            | 5 mm         |
| Dimension a                      | 5.00 mm      |
| Dimensions of slip-on connection | 2,8 x 0,8 mm |

#### General

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

### Technical data

#### General

|                                        |                           |
|----------------------------------------|---------------------------|
| Range of articles                      | DFK-MSTB 2,5/...-G        |
| Type of contact                        | Male connector            |
| Number of positions                    | 2                         |
| Connection method                      | Solder/Slip-on connection |
| Insulating material group              | PA                        |
| Rated surge voltage (III/3)            | 4 kV                      |
| Rated surge voltage (III/2)            | 4 kV                      |
| Rated surge voltage (II/2)             | 4 kV                      |
| Rated voltage (III/3)                  | 320 V                     |
| Rated voltage (III/2)                  | 320 V                     |
| Rated voltage (II/2)                   | 630 V                     |
| Connection in acc. with standard       | EN-VDE                    |
| Nominal current $I_N$                  | 12 A                      |
| Nominal cross section                  | 2.5 mm <sup>2</sup>       |
| Maximum load current                   | 12 A                      |
| Insulating material                    | PA                        |
| Flammability rating according to UL 94 | V2                        |

#### Connection data

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V2     |


#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


### Drawings

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

Drilling diagram



Dimensional drawing

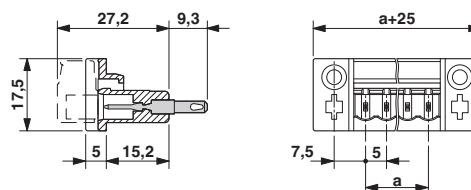

Dimension b: 2.7 mm + (no. of pos. x 5.0 mm)

Dimension c: Dim. b + 7.3 mm

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27141134 |
| eCl@ss 9.0 | 27141134 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |
| ETIM 5.0 | EC001283 |
| ETIM 6.0 | EC001283 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121410 |

### Approvals

#### Approvals

#### Approvals

CSA / VDE Gutachten mit Fertigungsüberwachung / IEC60335 CB Scheme / cULus Recognized / EAC

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

### Approvals

Ex Approvals

#### Approval details

|                                |                                                                                   |                                                                                                                                                                                           |       |
|--------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                            |  | <a href="http://www.csagroup.org/services/testing-and-certification/certified-product-listing/">http://www.csagroup.org/services/testing-and-certification/certified-product-listing/</a> | 13631 |
|                                | B                                                                                 | D                                                                                                                                                                                         |       |
| Nominal current I <sub>N</sub> | 15 A                                                                              | 10 A                                                                                                                                                                                      |       |
| Nominal voltage U <sub>N</sub> | 300 V                                                                             | 300 V                                                                                                                                                                                     |       |

|                                            |                                                                                   |                                                                                                                                                                                                         |          |
|--------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx">http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx</a> | 40004701 |
|                                            |                                                                                   |                                                                                                                                                                                                         |          |
| Nominal current I <sub>N</sub>             | 12 A                                                                              |                                                                                                                                                                                                         |          |
| Nominal voltage U <sub>N</sub>             | 250 V                                                                             |                                                                                                                                                                                                         |          |

|                                |                                                                                     |                                                           |                |
|--------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme                |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58978-B1B2 |
|                                |                                                                                     |                                                           |                |
| Nominal current I <sub>N</sub> | 12 A                                                                                |                                                           |                |
| Nominal voltage U <sub>N</sub> | 250 V                                                                               |                                                           |                |

|                                |                                                                                     |                                                                                                                                                       |                 |
|--------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized               |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                                | B                                                                                   | D                                                                                                                                                     |                 |
| Nominal current I <sub>N</sub> | 15 A                                                                                | 10 A                                                                                                                                                  |                 |
| Nominal voltage U <sub>N</sub> | 300 V                                                                               | 300 V                                                                                                                                                 |                 |

|     |                                                                                     |  |         |
|-----|-------------------------------------------------------------------------------------|--|---------|
| EAC |  |  | B.01742 |
|-----|-------------------------------------------------------------------------------------|--|---------|

### Accessories

Accessories

Coding element

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

### Accessories

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

---

### Filler plug

Accessories - MSTB-BL - 1755477



Keying cap, for forming sections, plugs onto header pin, green insulating material

---

### Mounting material

Screw set - DFK-MSTB-SS - 0708263



Screw set, for securing the header to the device wall, consists of an M3 x 10 screw, with a spring washer and a nut

Accessories - DFK-MSTB-R - 5030172



Locking latch, red insulating material, for housings MSTB 2.5/...ST and MSTBT 2.5/...ST

---

### Additional products

Printed-circuit board connector - MVSTBW 2,5/ 2-ST - 1792524



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

### Accessories

#### Printed-circuit board connector - MSTBP 2,5/ 2-ST - 1765771



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - SMSTB 2,5/ 2-ST - 1768765



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - MSTBT 2,5/ 2-ST - 1779835



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - FRONT-MSTB 2,5/ 2-ST - 1779411



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Front screw connection, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - MVSTBR 2,5/ 2-ST - 1792016



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

## Base strip - DFK-MSTB 2,5/ 2-G - 0707109

### Accessories

#### Printed-circuit board connector - MSTB 2,5/ 2-ST - 1754449



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Screw connection with tension sleeve, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - FKC 2,5/ 2-ST - 1910351



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - FKCT 2,5/ 2-ST - 1909210



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - FKCVR 2,5/ 2-ST - 1909715



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin

---

#### Printed-circuit board connector - FKCVW 2,5/ 2-ST - 1910034



Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, connection method: Push-in spring connection, Color: green, contact surface: Tin