

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://phoenixcontact.com/download>)




The figure shows an 10-position version

Plug component, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, connection method: Crimp connection, Color: green, Corresponding female crimp contacts with current [A] and conductor cross section range [mm²] data: 10A/MSTBC-MT 0,5-1,0 (3190564); 10A/MSTBC-MT 0,5-1,0 BA (3190645); 12A/MSTBC-MT 1,5-2,5 (3190551); 12A/MSTBC-MT 1,5-2,5 BA (3190658). BA = Bandkontakte

### Why buy this product

- ☒ Inexpensive connection of large quantities of pre-assembled conductors

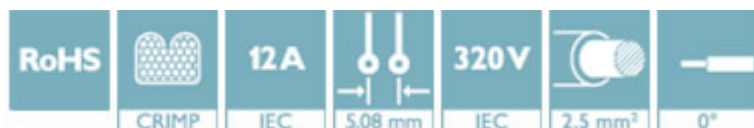

### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 STK                                                                                                  |
| Minimum order quantity               | 50 STK                                                                                                  |
| GTIN                                 | <br>4 017918 047207 |
| GTIN                                 | 4017918047207                                                                                           |
| Weight per Piece (excluding packing) | 2.670 g                                                                                                 |
| Custom tariff number                 | 85472000                                                                                                |
| Country of origin                    | Poland                                                                                                  |

### Technical data

#### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 25 mm    |
| Width [ w ]  | 30.44 mm |
| Height [ h ] | 10 mm    |
| Pitch        | 5.08 mm  |
| Dimension a  | 25.4 mm  |

#### General

|                     |                  |
|---------------------|------------------|
| Range of articles   | MSTBC 2,5/...-ST |
| Type of contact     | Female connector |
| Number of positions | 6                |

# Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

## Technical data

### General

|                                        |                     |
|----------------------------------------|---------------------|
| Connection method                      | Crimp connection    |
| Insulating material group              | I                   |
| Rated surge voltage (III/3)            | 4 kV                |
| Rated surge voltage (III/2)            | 4 kV                |
| Rated surge voltage (II/2)             | 4 kV                |
| Rated voltage (III/3)                  | 320 V               |
| Rated voltage (III/2)                  | 320 V               |
| Rated voltage (II/2)                   | 630 V               |
| Connection in acc. with standard       | EN-VDE              |
| Nominal current $I_N$                  | 12 A                |
| Nominal cross section                  | 2.5 mm <sup>2</sup> |
| Maximum load current                   | 12 A                |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |

### Connection data

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section flexible min. | 0.5 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 20                  |
| Conductor cross section AWG max.      | 14                  |
| Minimum AWG according to UL/CUL       | 20                  |
| Maximum AWG according to UL/CUL       | 14                  |

### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V0     |


### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


## Drawings

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

Diagram

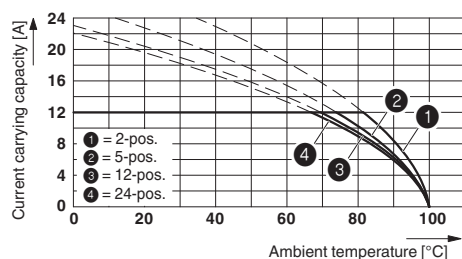

Dimensional drawing

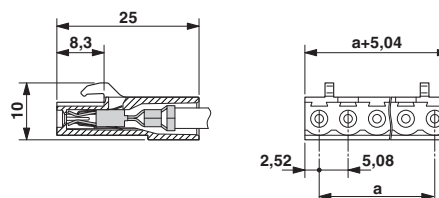

Type: MSTBC 2,5/...-ST-5,08 with MSTBA 2,5/...-G-5,08; contact:  
MSTBC-MT 1,5 - 2,5

### Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |
| ETIM 6.0 | EC002638 |

UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

Approvals

Approvals

CSA / UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCEB Scheme / cULus Recognized

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Approvals

Ex Approvals

#### Approval details

|                                |                                                                                   |                                                                                                                                                                                           |       |
|--------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                            |  | <a href="http://www.csagroup.org/services/testing-and-certification/certified-product-listing/">http://www.csagroup.org/services/testing-and-certification/certified-product-listing/</a> | 13631 |
|                                |                                                                                   |                                                                                                                                                                                           |       |
| mm²/AWG/kcmil                  |                                                                                   | 20-14                                                                                                                                                                                     |       |
| Nominal current I <sub>N</sub> |                                                                                   | 10 A                                                                                                                                                                                      |       |
| Nominal voltage U <sub>N</sub> |                                                                                   | 300 V                                                                                                                                                                                     |       |

|                                |                                                                                   |                                                                                                                                                       |              |
|--------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| UL Recognized                  |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                                |                                                                                   |                                                                                                                                                       |              |
|                                |                                                                                   | B                                                                                                                                                     | D            |
| mm²/AWG/kcmil                  |                                                                                   | 20-14                                                                                                                                                 | 20-14        |
| Nominal current I <sub>N</sub> |                                                                                   | 10 A                                                                                                                                                  | 10 A         |
| Nominal voltage U <sub>N</sub> |                                                                                   | 250 V                                                                                                                                                 | 300 V        |

|                                            |                                                                                     |                                                                                                                                                                                                         |          |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx">http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx</a> | 40004701 |
|                                            |                                                                                     |                                                                                                                                                                                                         |          |
| mm²/AWG/kcmil                              |                                                                                     | 0.5-1.0                                                                                                                                                                                                 |          |
| Nominal current I <sub>N</sub>             |                                                                                     | 10 A                                                                                                                                                                                                    |          |
| Nominal voltage U <sub>N</sub>             |                                                                                     | 250 V                                                                                                                                                                                                   |          |

|                                |                                                                                     |                                                                                                                                                       |              |
|--------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| cUL Recognized                 |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                                |                                                                                     |                                                                                                                                                       |              |
|                                |                                                                                     | B                                                                                                                                                     | D            |
| mm²/AWG/kcmil                  |                                                                                     | 20-14                                                                                                                                                 | 20-14        |
| Nominal current I <sub>N</sub> |                                                                                     | 10 A                                                                                                                                                  | 10 A         |
| Nominal voltage U <sub>N</sub> |                                                                                     | 250 V                                                                                                                                                 | 300 V        |

|                 |                                                                                     |                                                           |                |
|-----------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58978-B1B2 |
|                 |                                                                                     |                                                           |                |
| mm²/AWG/kcmil   |                                                                                     | 0.5-1.0                                                   |                |

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Approvals

|                                |       |
|--------------------------------|-------|
|                                |       |
| Nominal current I <sub>N</sub> | 10 A  |
| Nominal voltage U <sub>N</sub> | 250 V |

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

### Accessories

#### Accessories

#### Coding element

Coding profile - CP-MSTB - 1734634



Coding profile, is inserted into the slot on the plug or inverted header, red insulating material

#### Crimp contact

Accessories - MSTBC-MT 0,5-1,0 - 3190564



Module female contact, is inserted into the plug housing MSTBC after crimping the conductor, for conductors from 0.5 to 1.0 mm<sup>2</sup>

Accessories - MSTBC-MT 0,5-1,0 BA - 3190645



Module female contact, is inserted into the MSTBC connector shell after the conductor has been crimped, for conductors from 0.5 - 1.0 mm<sup>2</sup>, ribbon contact

Accessories - MSTBC-MT 1,5-2,5 - 3190551



Module female contact, is inserted into the plug housing MSTBC after crimping the conductor, for conductors from 1.5 to 2.5 mm<sup>2</sup>

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

Female insert - MSTBC-MT 1,5-2,5 BA - 3190658



Module female contact, is inserted into the MSTBC connector shell after the conductor has been crimped, for conductors from 1.5 - 2.5 mm<sup>2</sup>, ribbon contact

---

### Crimping tool

Crimping pliers - CRIMPFOX MT 2,5 - 1204038



Crimping pliers, for crimping conductors to the module female contacts STG-MTN, crimp range: 0.5-2.5 mm<sup>2</sup>, AWG: 20-14

---

### Labeled terminal marker

Marker card - SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: adhesive, for terminal block width: 5.08 mm, Lettering field: 5.08 x 3.8 mm

---

### Screwdriver tools

Screwdriver - SZS 0,4X2,5 VDE - 1205037



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

---

Accessories - MSTBC-MT 0,2-0,5 - 1879531



Module socket contact, is inserted into the plug housing MSTBC after crimping the conductor, for conductors from 0.2 to 0.5 mm<sup>2</sup>

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

Accessories - MSTBC-MT 0,2-0,5 BAND - 1879544



Module socket contact, is inserted into the plug housing MSTBC after crimping the conductor, for conductors from 0.2 to 0.5 mm<sup>2</sup>

---

### Additional products

Base strip - MSTBW 2,5/ 6-G-5,08 - 1735840



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

---

Base strip - MSTBVA 2,5/ 6-G-5,08 - 1755778



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

---

Base strip - MSTBA 2,5/ 6-G-5,08 - 1757284



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

---

Base strip - MSTBV 2,5/ 6-G-5,08 - 1758050



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

#### Base strip - MSTB 2,5/ 6-G-5,08 - 1759059



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

#### Base strip - MDSTB 2,5/ 6-G1-5,08 - 1762415



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

#### Base strip - MDSTBV 2,5/ 6-G1-5,08 - 1762541



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

#### Base strip - SMSTBA 2,5/ 6-G-5,08 - 1767410



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

#### Base strip - SMSTB 2,5/ 6-G-5,08 - 1769502



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

#### Base strip - MSTBA 2,5/ 6-G-5,08-LA - 1770986



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

---

#### Base strip - MDSTBA 2,5/ 6-G-5,08 - 1842102



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, The article can be aligned to create different nos. of positions! In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

---

#### Base strip - MDSTBW 2,5/ 6-G-5,08 - 1842254



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, The article can be aligned to create different nos. of positions! In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

---

#### Housing - MDSTB 2,5/ 6-G-5,08 - 1844977



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, Can be aligned! Mounting flange: Order No. 1736771, 1736768. In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

---

#### Base strip - MDSTBVA 2,5/ 6-G-5,08 - 1845374



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, The article can be aligned to create different nos. of positions! In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

#### Base strip - MDSTBV 2,5/ 6-G-5,08 - 1845523



Header, nominal current: 10 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering, Can be aligned! Mounting flange: Order No. 1836477, 1836480. In combination with MVSTB or FKCV plug components, both an MVSTBW (or FKCVW) and an MVSTBR plug (or FKCVR) must be used. Combination with TMSTBP plug components is not possible!

---

#### Base strip - MSTBO 2,5/ 6-GR-5,08 - 1847149



Header, nominal current: 8 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

---

#### Base strip - MSTBO 2,5/ 6-GL-5,08 - 1850479



Header, nominal current: 8 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

---

#### Base strip - EMSTBVA 2,5/ 6-G-5,08 - 1859551



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Press-in technology

---

#### Base strip - EMSTBA 2,5/ 6-G-5,08 - 1880342



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Press-in technology

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

Base strip - DFK-MSTBA 2,5/ 6-G-5,08 - 1898871



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

Base strip - DFK-MSTBVA 2,5/ 6-G-5,08 - 1899171



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: green, contact surface: Tin, mounting: Wave soldering

Printed-circuit board connector - MSTBA 2,5/ 6-G-5,08 THT - 1902783



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

Base strip - MSTBVA 2,5/ 6-G-5,08 THT - 1902851



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

Printed-circuit board connector - MSTBA 2,5/ 6-G-5,08 THT-R56 - 1937279



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

#### Base strip - MSTBVA 2,5/ 6-G-5,08 THT-R56 - 1940457



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

---

#### Printed-circuit board connector - CC 2,5/ 6-G-5,08 P26THR - 1954511



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

---

#### Printed-circuit board connector - CC 2,5/ 6-G-5,08 P26THRR56 - 1954621



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

---

#### Printed-circuit board connector - CCA 2,5/ 6-G-5,08 P26THR - 1954951



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

---

#### Printed-circuit board connector - CCA 2,5/ 6-G-5,08 P26THRR56 - 1955073



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

#### Printed-circuit board connector - CCV 2,5/ 6-G-5,08 P26THR - 1955426



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

#### Printed-circuit board connector - CCV 2,5/ 6-G-5,08 P26THRR56 - 1955565



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

#### Printed-circuit board connector - CCVA 2,5/ 6-G-5,08 P26THR - 1955895



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

#### Printed-circuit board connector - CCVA 2,5/ 6-G-5,08 P26THRR56 - 1956001



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

#### Printed-circuit board connector - CCA 2,5/ 6-GL-5,08P26THR - 1959105



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, Two-in-one – Pin strips must always be made up of a left (L) and a right (R) segment. Please allow for the corresponding counterpart from the accessories to complete the THR pin strip.

## Printed-circuit board connector - MSTBC 2,5/ 6-ST-5,08 - 1808858

### Accessories

#### Printed-circuit board connector - CCA 2,5/ 6-GR-5,08P26THR - 1959244



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, Two-in-one – Pin strips must always be made up of a left (L) and a right (R) segment. Please allow for the corresponding counterpart from the accessories to complete the THR pin strip.

---

#### Printed-circuit board connector - CCVA 2,5/ 6-GL-5,08P26THR - 1959943



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, Two-in-one – Pin strips must always be made up of a left (L) and a right (R) segment. Please allow for the corresponding counterpart from the accessories to complete the THR pin strip.

---

#### Printed-circuit board connector - CCVA 2,5/ 6-GL-5,08P26THRR56 - 1960042



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, Two-in-one – Pin strips must always be made up of a left (L) and a right (R) segment. Please allow for the corresponding counterpart from the accessories to complete the THR pin strip.

---

#### Printed-circuit board connector - CCVA 2,5/ 6-GR-5,08P26THR - 1960123



Header, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 6, pitch: 5.08 mm, Color: black, contact surface: Tin, mounting: THR soldering, Two-in-one – Pin strips must always be made up of a left (L) and a right (R) segment. Please allow for the corresponding counterpart from the accessories to complete the THR pin strip.