
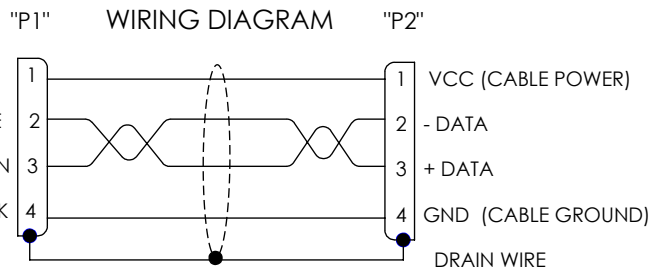


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/13	D.GRIFFIN

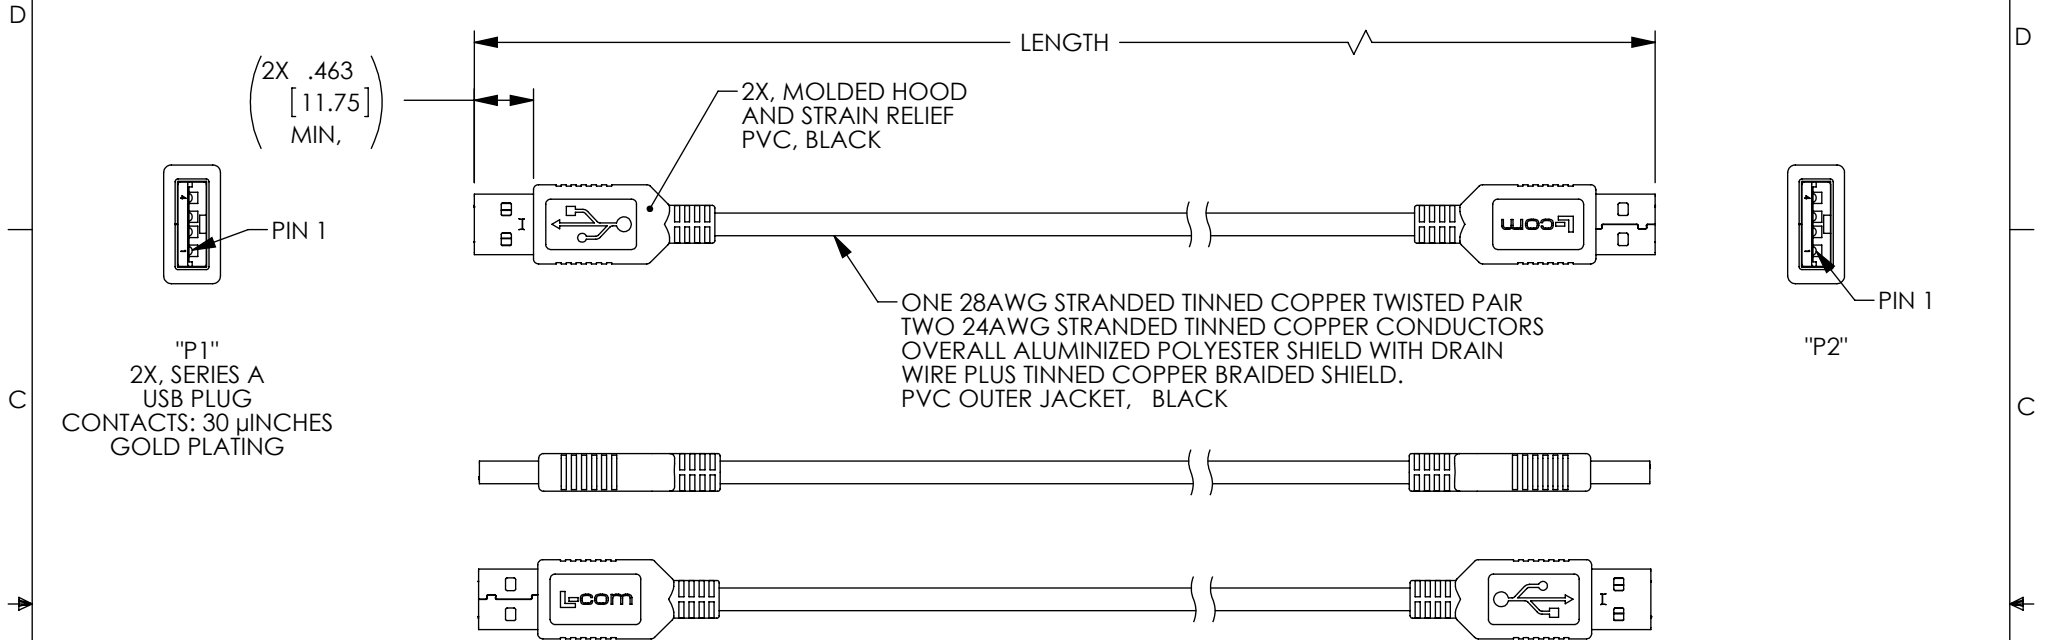

PART NUMBER	LENGTH	
	METERS	FEET
CAUBLKAA-03M	0.3	[.98]
CAUBLKAA-05M	0.5	[1.64]
CAUBLKAA-075M	0.75	[2.46]
CAUBLKAA-1M	1.0	[3.28]
CAUBLKAA-2M	2.0	[6.56]
CAUBLKAA-3M	3.0	[9.84]
CAUBLKAA-4M	4.0	[13.12]
CAUBLKAA-5M	5.0	[16.41]

NOTES:

1. CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET USB 2.0 REQUIREMENTS.
2. CABLE ASSEMBLIES SHALL HAVE 360° SHIELD TERMINATION.
3. CONNECT DRAIN WIRE TO CONNECTOR SHELLS.
4. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	10/28/13		
	CHECKED BY D.DESJARDIN	10/28/13	CATEGORY USB	
	APPROVED BY S. SMITH	10/28/13	PRODUCT DESCRIPTION CBL,USB A/A BLK	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
COLOR VARIATIONS MAY OCCUR		DWG. NO. CAUBLKAA	REV. A	SCALE: NONE CAD FILE: CAUBLKAA.SLDDRW SHEET 1 OF 1