


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN 3715: REMOVE "UL TYPE CM", NEW FORMAT	11/18/08	D.FRISIELLO
C	ECN 4289: ADDED .463 MIN. TO P1 AND P2	9/25/09	D.FRISIELLO
D	ECN 5868: ADDED LENGTHS, 2 VIEWS, UPDATED WIRE MAP, PACKAGING NOTE	12/1/11	D.FRISIELLO
E	ECN6237: ADDED CONTACT PLATING NOTE, UPDATED FORMAT.	09/18/12	DFP

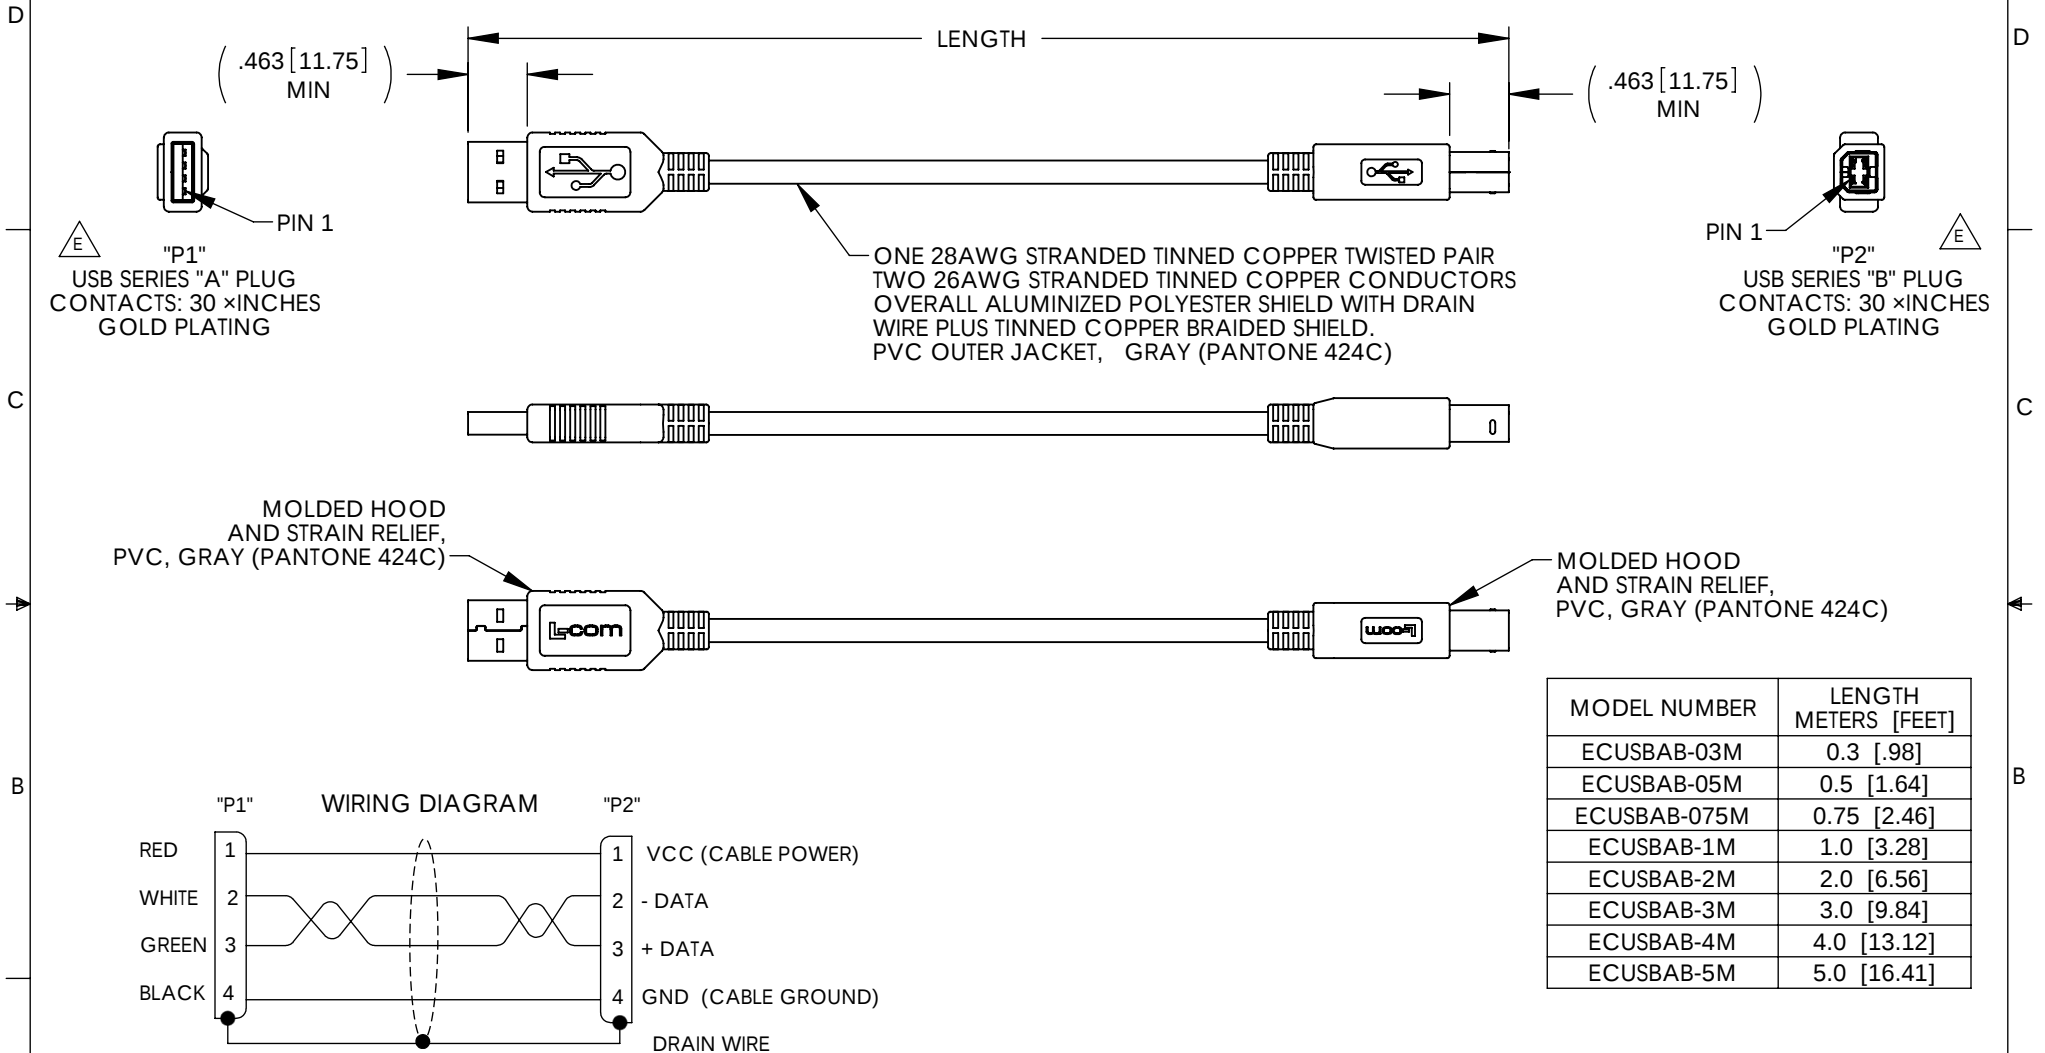

MODEL NUMBER	LENGTH METERS [FEET]
ECUSBAB-03M	0.3 [.98]
ECUSBAB-05M	0.5 [1.64]
ECUSBAB-075M	0.75 [2.46]
ECUSBAB-1M	1.0 [3.28]
ECUSBAB-2M	2.0 [6.56]
ECUSBAB-3M	3.0 [9.84]
ECUSBAB-4M	4.0 [13.12]
ECUSBAB-5M	5.0 [16.41]

NOTES:

- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: 012 [305] = +1 [25] / -0 >12 [305] 060 [1524] = +2 [51] / -0 >60 [1524] 0120 [3048] = +4 [102] / -0 >120 [3048] 0300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = 0.02 .XX = 0.02 .XXX = 0.005	APPROVALS		DATE		 Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D.FRISIELLO		1/31/08					
	CHECKED BY S.SMITH		1/31/08					
	APPROVED BY S.SMITH		1/31/08					
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY				CATEGORY USB			
					PRODUCT DESCRIPTION CBL, USB A/B 28/26			
	COLOR VARIATIONS MAY OCCUR				SIZE A	FSCM NO. 43321	DWG. NO. ECUSBAB	REV. E
					REF		SCALE: NONE	CAD FILE: ECUSBAB.SLDDRW