


CUSTOMER MCM FILE NO. 28-730

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE CONFIDENTIAL PROPERTY OF SAMAR AND SHALL NOT BE REPRODUCED OR COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION.

REV.	DESCRIPTION	DRAWN / DATE	APPROVED / DATE
0	INITIAL RELEASE	LIN 04/18/2016	BERNINI 04/18/2016

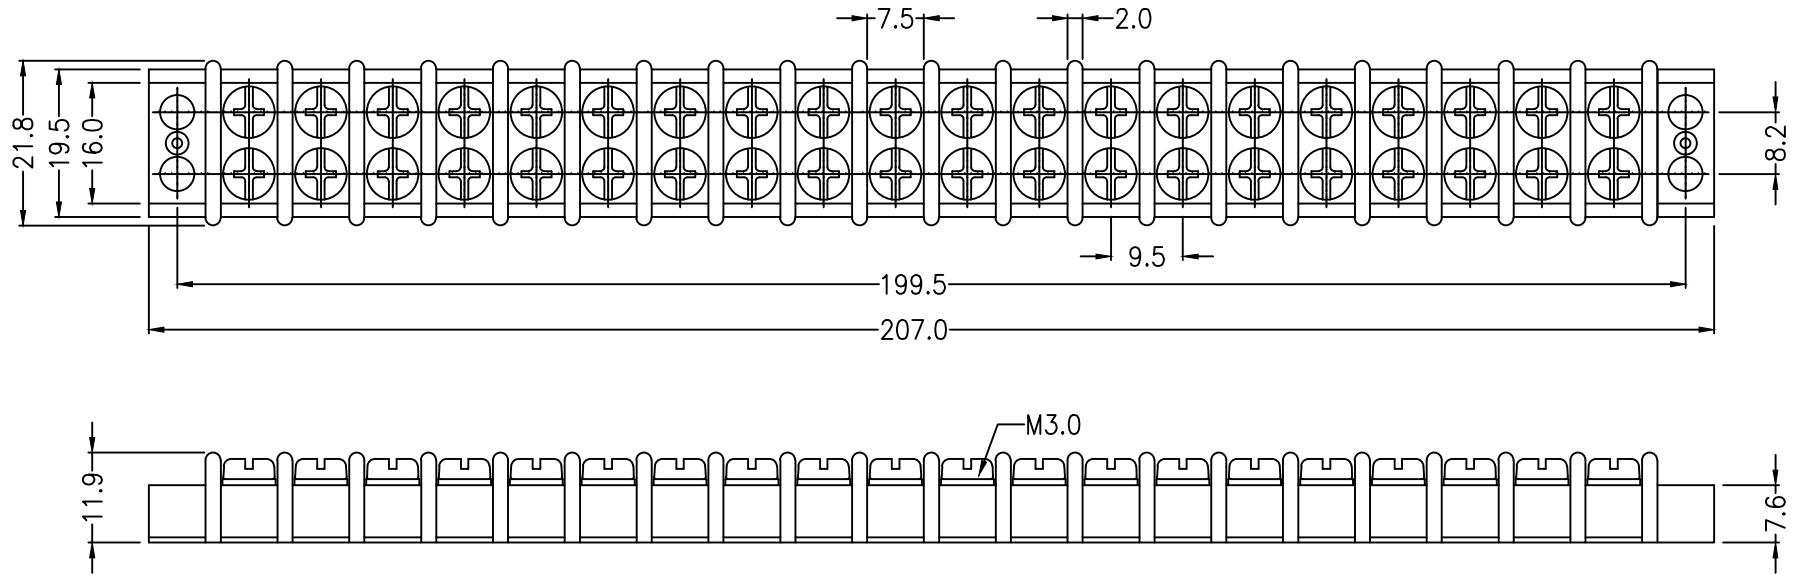

Material:

1. Insulator Body: Plastic NYLON 66, black.
2. Terminals: 0.8t, Brass, Nickel Plated.
3. Terminal Screws: Steel, Nickel Plated.

Specifications:

1. Rated: 10A 300VAC.
2. Insulation Withstands Voltage: AC 2000V/min.
3. Insulation Resistance: 500MΩ or More at DC500V.
4. Using Temperature Range: -40°C~+105°C.
5. Screw Torque Value: 10 Kg-cm.
6. Wire Range Awg: 14-18 STR.

International Approvals:

UL,

P/N	POS.
28-710	4P
28-715	8P
28-720	12P
28-725	16P
28-730	20P

DIMENSIONS ARE IN mm [INCH]		TOLERANCES ARE FRACTIONS DECIMALS ANGLES		MATERIAL		P/N 28-730		DRAWN LIN		DATE 04/18/2016	
MOLD NO. 28-730		.X ± 0.20 [0.008] .XX ± 0.12 [0.005] ANGULAR ± 1°		FINISH		PROJECT NO.					
				COLOR		SCALE 1:1		SIZE A4		SHEET 1 OF 1	
BARRIER STRIP 20P TERMINAL						MG085					