



## Unimate Range - SLA/BLA



### Pin headers SLA 5.08/90



| Technical data    | VDE  | UL  | CSA |
|-------------------|------|-----|-----|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 10   | 10  | 10  |



\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 227

Solder pin length 4.5 mm

| Poles | Type           | Part No.   | Qty. |
|-------|----------------|------------|------|
| 2     | SLA 5.08/2/90  | 1346860000 | 100  |
| 3     | SLA 5.08/3/90  | 1346960000 | 100  |
| 4     | SLA 5.08/4/90  | 1347060000 | 100  |
| 5     | SLA 5.08/5/90  | 1347160000 | 50   |
| 6     | SLA 5.08/6/90  | 1347260000 | 50   |
| 7     | SLA 5.08/7/90  | 1347360000 | 50   |
| 8     | SLA 5.08/8/90  | 1347460000 | 50   |
| 9     | SLA 5.08/9/90  | 1347560000 | 50   |
| 10    | SLA 5.08/10/90 | 1347660000 | 50   |
| 11    | SLA 5.08/11/90 | 1347760000 | 50   |
| 12    | SLA 5.08/12/90 | 1347860000 | 50   |
| 13    | SLA 5.08/13/90 | 1347960000 | 50   |
| 14    | SLA 5.08/14/90 | 1348060000 | 50   |
| 15    | SLA 5.08/15/90 | 1348160000 | 50   |
| 16    | SLA 5.08/16/90 | 1348260000 | 50   |
| 17    | SLA 5.08/17/90 | 1348360000 | 20   |
| 18    | SLA 5.08/18/90 | 1348460000 | 20   |
| 19    | SLA 5.08/19/90 | 1348560000 | 20   |
| 20    | SLA 5.08/20/90 | 1348660000 | 20   |
| 21    | SLA 5.08/21/90 | 1348760000 | 20   |
| 22    | SLA 5.08/22/90 | 1348860000 | 20   |
| 23    | SLA 5.08/23/90 | 1348960000 | 20   |
| 24    | SLA 5.08/24/90 | 1349060000 | 20   |

| Accessories   | Page |
|---------------|------|
| Mounting      | –    |
| Marking       | 190  |
| Coding        | 193  |
| Miscellaneous | 199  |

### Pin headers SLA 5.08/90B



| Technical data    | VDE  | UL  | CSA |
|-------------------|------|-----|-----|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 10   | 10  | 10  |



\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 227

Solder pin length 4.5 mm

| Poles | Type            | Part No.   | Qty. |
|-------|-----------------|------------|------|
| 2     | SLA 5.08/2/90B  | 1351460000 | 100  |
| 3     | SLA 5.08/3/90B  | 1351560000 | 100  |
| 4     | SLA 5.08/4/90B  | 1351660000 | 100  |
| 5     | SLA 5.08/5/90B  | 1351760000 | 50   |
| 6     | SLA 5.08/6/90B  | 1351860000 | 50   |
| 7     | SLA 5.08/7/90B  | 1351960000 | 50   |
| 8     | SLA 5.08/8/90B  | 1352060000 | 50   |
| 9     | SLA 5.08/9/90B  | 1352160000 | 50   |
| 10    | SLA 5.08/10/90B | 1352260000 | 50   |
| 11    | SLA 5.08/11/90B | 1352360000 | 50   |
| 12    | SLA 5.08/12/90B | 1352460000 | 50   |
| 13    | SLA 5.08/13/90B | 1352560000 | 50   |
| 14    | SLA 5.08/14/90B | 1352660000 | 50   |
| 15    | SLA 5.08/15/90B | 1352760000 | 50   |
| 16    | SLA 5.08/16/90B | 1352860000 | 50   |
| 17    | SLA 5.08/17/90B | 1352960000 | 20   |
| 18    | SLA 5.08/18/90B | 1353060000 | 20   |
| 19    | SLA 5.08/19/90B | 1353160000 | 20   |
| 20    | SLA 5.08/20/90B | 1353260000 | 20   |
| 21    | SLA 5.08/21/90B | 1353360000 | 20   |
| 22    | SLA 5.08/22/90B | 1353460000 | 20   |
| 23    | SLA 5.08/23/90B | 1353560000 | 20   |
| 24    | SLA 5.08/24/90B | 1353660000 | 20   |

| Accessories   | Page |
|---------------|------|
| Mounting      | 187* |
| Marking       | 190  |
| Coding        | 193  |
| Miscellaneous | 199  |

### Pin headers SLA 5.08/180




| Technical data    | VDE  | UL  | CSA |
|-------------------|------|-----|-----|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 10   | 10  | 10  |

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 227


Solder pin length 4.5 mm

| Poles | Type            | Part No.   | Qty. |
|-------|-----------------|------------|------|
| 2     | SLA 5.08/2/180  | 1349160000 | 100  |
| 3     | SLA 5.08/3/180  | 1349260000 | 100  |
| 4     | SLA 5.08/4/180  | 1349360000 | 100  |
| 5     | SLA 5.08/5/180  | 1349460000 | 50   |
| 6     | SLA 5.08/6/180  | 1349560000 | 50   |
| 7     | SLA 5.08/7/180  | 1349660000 | 50   |
| 8     | SLA 5.08/8/180  | 1349760000 | 50   |
| 9     | SLA 5.08/9/180  | 1349860000 | 50   |
| 10    | SLA 5.08/10/180 | 1349960000 | 50   |
| 11    | SLA 5.08/11/180 | 1350060000 | 50   |
| 12    | SLA 5.08/12/180 | 1350160000 | 50   |
| 13    | SLA 5.08/13/180 | 1350260000 | 50   |
| 14    | SLA 5.08/14/180 | 1350360000 | 50   |
| 15    | SLA 5.08/15/180 | 1350460000 | 50   |
| 16    | SLA 5.08/16/180 | 1350560000 | 50   |
| 17    | SLA 5.08/17/180 | 1350660000 | 20   |
| 18    | SLA 5.08/18/180 | 1350760000 | 20   |
| 19    | SLA 5.08/19/180 | 1350860000 | 20   |
| 20    | SLA 5.08/20/180 | 1350960000 | 20   |
| 21    | SLA 5.08/21/180 | 1351060000 | 20   |
| 22    | SLA 5.08/22/180 | 1351160000 | 20   |
| 23    | SLA 5.08/23/180 | 1351260000 | 20   |
| 24    | SLA 5.08/24/180 | 1351360000 | 20   |

| Accessories   | Page |
|---------------|------|
| Mounting      | –    |
| Marking       | 190  |
| Coding        | 193  |
| Miscellaneous | –    |



### Pin headers SLA 5.08/180B

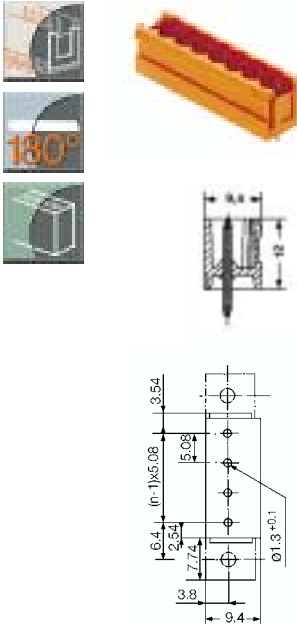

| Technical data    | VDE  | UL  | CSA |
|-------------------|------|-----|-----|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 10   | 10  | 10  |

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 226


Solder pin length 4.5 mm

#### Color

| Poles | Type             | Part No.   | Qty. |
|-------|------------------|------------|------|
| 2     | SLA 5.08/2/180B  | 1353760000 | 100  |
| 3     | SLA 5.08/3/180B  | 1353860000 | 100  |
| 4     | SLA 5.08/4/180B  | 1353960000 | 100  |
| 5     | SLA 5.08/5/180B  | 1354060000 | 50   |
| 6     | SLA 5.08/6/180B  | 1354160000 | 50   |
| 7     | SLA 5.08/7/180B  | 1354260000 | 50   |
| 8     | SLA 5.08/8/180B  | 1354360000 | 50   |
| 9     | SLA 5.08/9/180B  | 1354460000 | 50   |
| 10    | SLA 5.08/10/180B | 1354560000 | 50   |
| 11    | SLA 5.08/11/180B | 1354660000 | 50   |
| 12    | SLA 5.08/12/180B | 1354760000 | 50   |
| 13    | SLA 5.08/13/180B | 1354860000 | 50   |
| 14    | SLA 5.08/14/180B | 1354960000 | 50   |
| 15    | SLA 5.08/15/180B | 1355060000 | 50   |
| 16    | SLA 5.08/16/180B | 1355160000 | 50   |
| 17    | SLA 5.08/17/180B | 1355260000 | 20   |
| 18    | SLA 5.08/18/180B | 1355360000 | 20   |
| 19    | SLA 5.08/19/180B | 1355460000 | 20   |
| 20    | SLA 5.08/20/180B | 1355560000 | 20   |
| 21    | SLA 5.08/21/180B | 1355660000 | 20   |
| 22    | SLA 5.08/22/180B | 1355760000 | 20   |
| 23    | SLA 5.08/23/180B | 1355860000 | 20   |
| 24    | SLA 5.08/24/180B | 1355960000 | 20   |

| Accessories   | Page |
|---------------|------|
| Mounting      | 187* |
| Marking       | 190  |
| Coding        | 193  |
| Miscellaneous | -    |

### Pin headers SLAKU 5.08

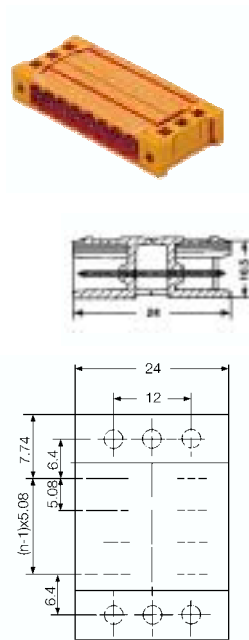

| Technical data    | VDE  | UL  | CSA |
|-------------------|------|-----|-----|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 10   | 10  | 8   |


\*Pollution severity 3 / Overvoltage category III

#### Color

| Poles | Type          | Part No.   | Qty. |
|-------|---------------|------------|------|
| 2     | SLAKU 5.08/2  | 1359660000 | 50   |
| 3     | SLAKU 5.08/3  | 1359760000 | 50   |
| 4     | SLAKU 5.08/4  | 1342760000 | 50   |
| 5     | SLAKU 5.08/5  | 1359860000 | 25   |
| 6     | SLAKU 5.08/6  | 1359960000 | 25   |
| 7     | SLAKU 5.08/7  | 1360060000 | 20   |
| 8     | SLAKU 5.08/8  | 1342860000 | 20   |
| 9     | SLAKU 5.08/9  | 1360160000 | 20   |
| 10    | SLAKU 5.08/10 | 1360260000 | 20   |
| 11    | SLAKU 5.08/11 | 1360360000 | 10   |
| 12    | SLAKU 5.08/12 | 1360460000 | 10   |

| Accessories   | Page |
|---------------|------|
| Mounting      | -    |
| Marking       | -    |
| Coding        | -    |
| Miscellaneous | -    |

### Pin headers SLAD 5.08/90

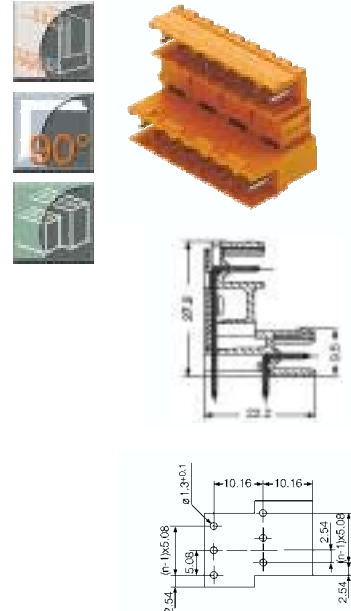

| Technical data    | VDE  | UL  | CSA |
|-------------------|------|-----|-----|
| Rated voltage (V) | 250* | 300 | 300 |
| Rated current (A) | 8    | 10  | 7   |

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 227

Solder pin length 4.5 mm

#### Color

| Poles | Type            | Part No.   | Qty. |
|-------|-----------------|------------|------|
| 4     | SLAD 5.08/4/90  | 1321660000 | 50   |
| 6     | SLAD 5.08/6/90  | 1321760000 | 50   |
| 8     | SLAD 5.08/8/90  | 1385560000 | 50   |
| 10    | SLAD 5.08/10/90 | 1385660000 | 50   |
| 12    | SLAD 5.08/12/90 | 1385760000 | 50   |
| 14    | SLAD 5.08/14/90 | 1385860000 | 50   |
| 16    | SLAD 5.08/16/90 | 1385960000 | 20   |
| 18    | SLAD 5.08/18/90 | 1386060000 | 20   |
| 20    | SLAD 5.08/20/90 | 1386160000 | 20   |
| 22    | SLAD 5.08/22/90 | 1386260000 | 10   |
| 24    | SLAD 5.08/24/90 | 1386360000 | 10   |
| 26    | SLAD 5.08/26/90 | 1386460000 | 10   |
| 28    | SLAD 5.08/28/90 | 1386560000 | 10   |
| 30    | SLAD 5.08/30/90 | 1386660000 | 10   |
| 32    | SLAD 5.08/32/90 | 1386760000 | 10   |
| 34    | SLAD 5.08/34/90 | 1386860000 | 10   |
| 36    | SLAD 5.08/36/90 | 1386960000 | 10   |
| 38    | SLAD 5.08/38/90 | 1387060000 | 10   |
| 40    | SLAD 5.08/40/90 | 1387160000 | 10   |
| 42    | SLAD 5.08/42/90 | 1387260000 | 10   |
| 44    | SLAD 5.08/44/90 | 1387360000 | 10   |
| 46    | SLAD 5.08/46/90 | 1387460000 | 10   |
| 48    | SLAD 5.08/48/90 | 1387570000 | 10   |

| Accessories   | Page     |
|---------------|----------|
| Mounting      | 188      |
| Marking       | 190      |
| Coding        | 192, 193 |
| Miscellaneous | -        |

\* See Note, page 187