



Datenblatt - Fiche technique - Data sheet


11.02.8875



ROLINE USB 3.0 Kabel, A ST - Micro B ST, 2,0m

ROLINE USB 3.0 Cable, A M - Micro B M, 2.0m

ROLINE USB 3.0 Cable, A - Micro B, M/M, 2.0 m

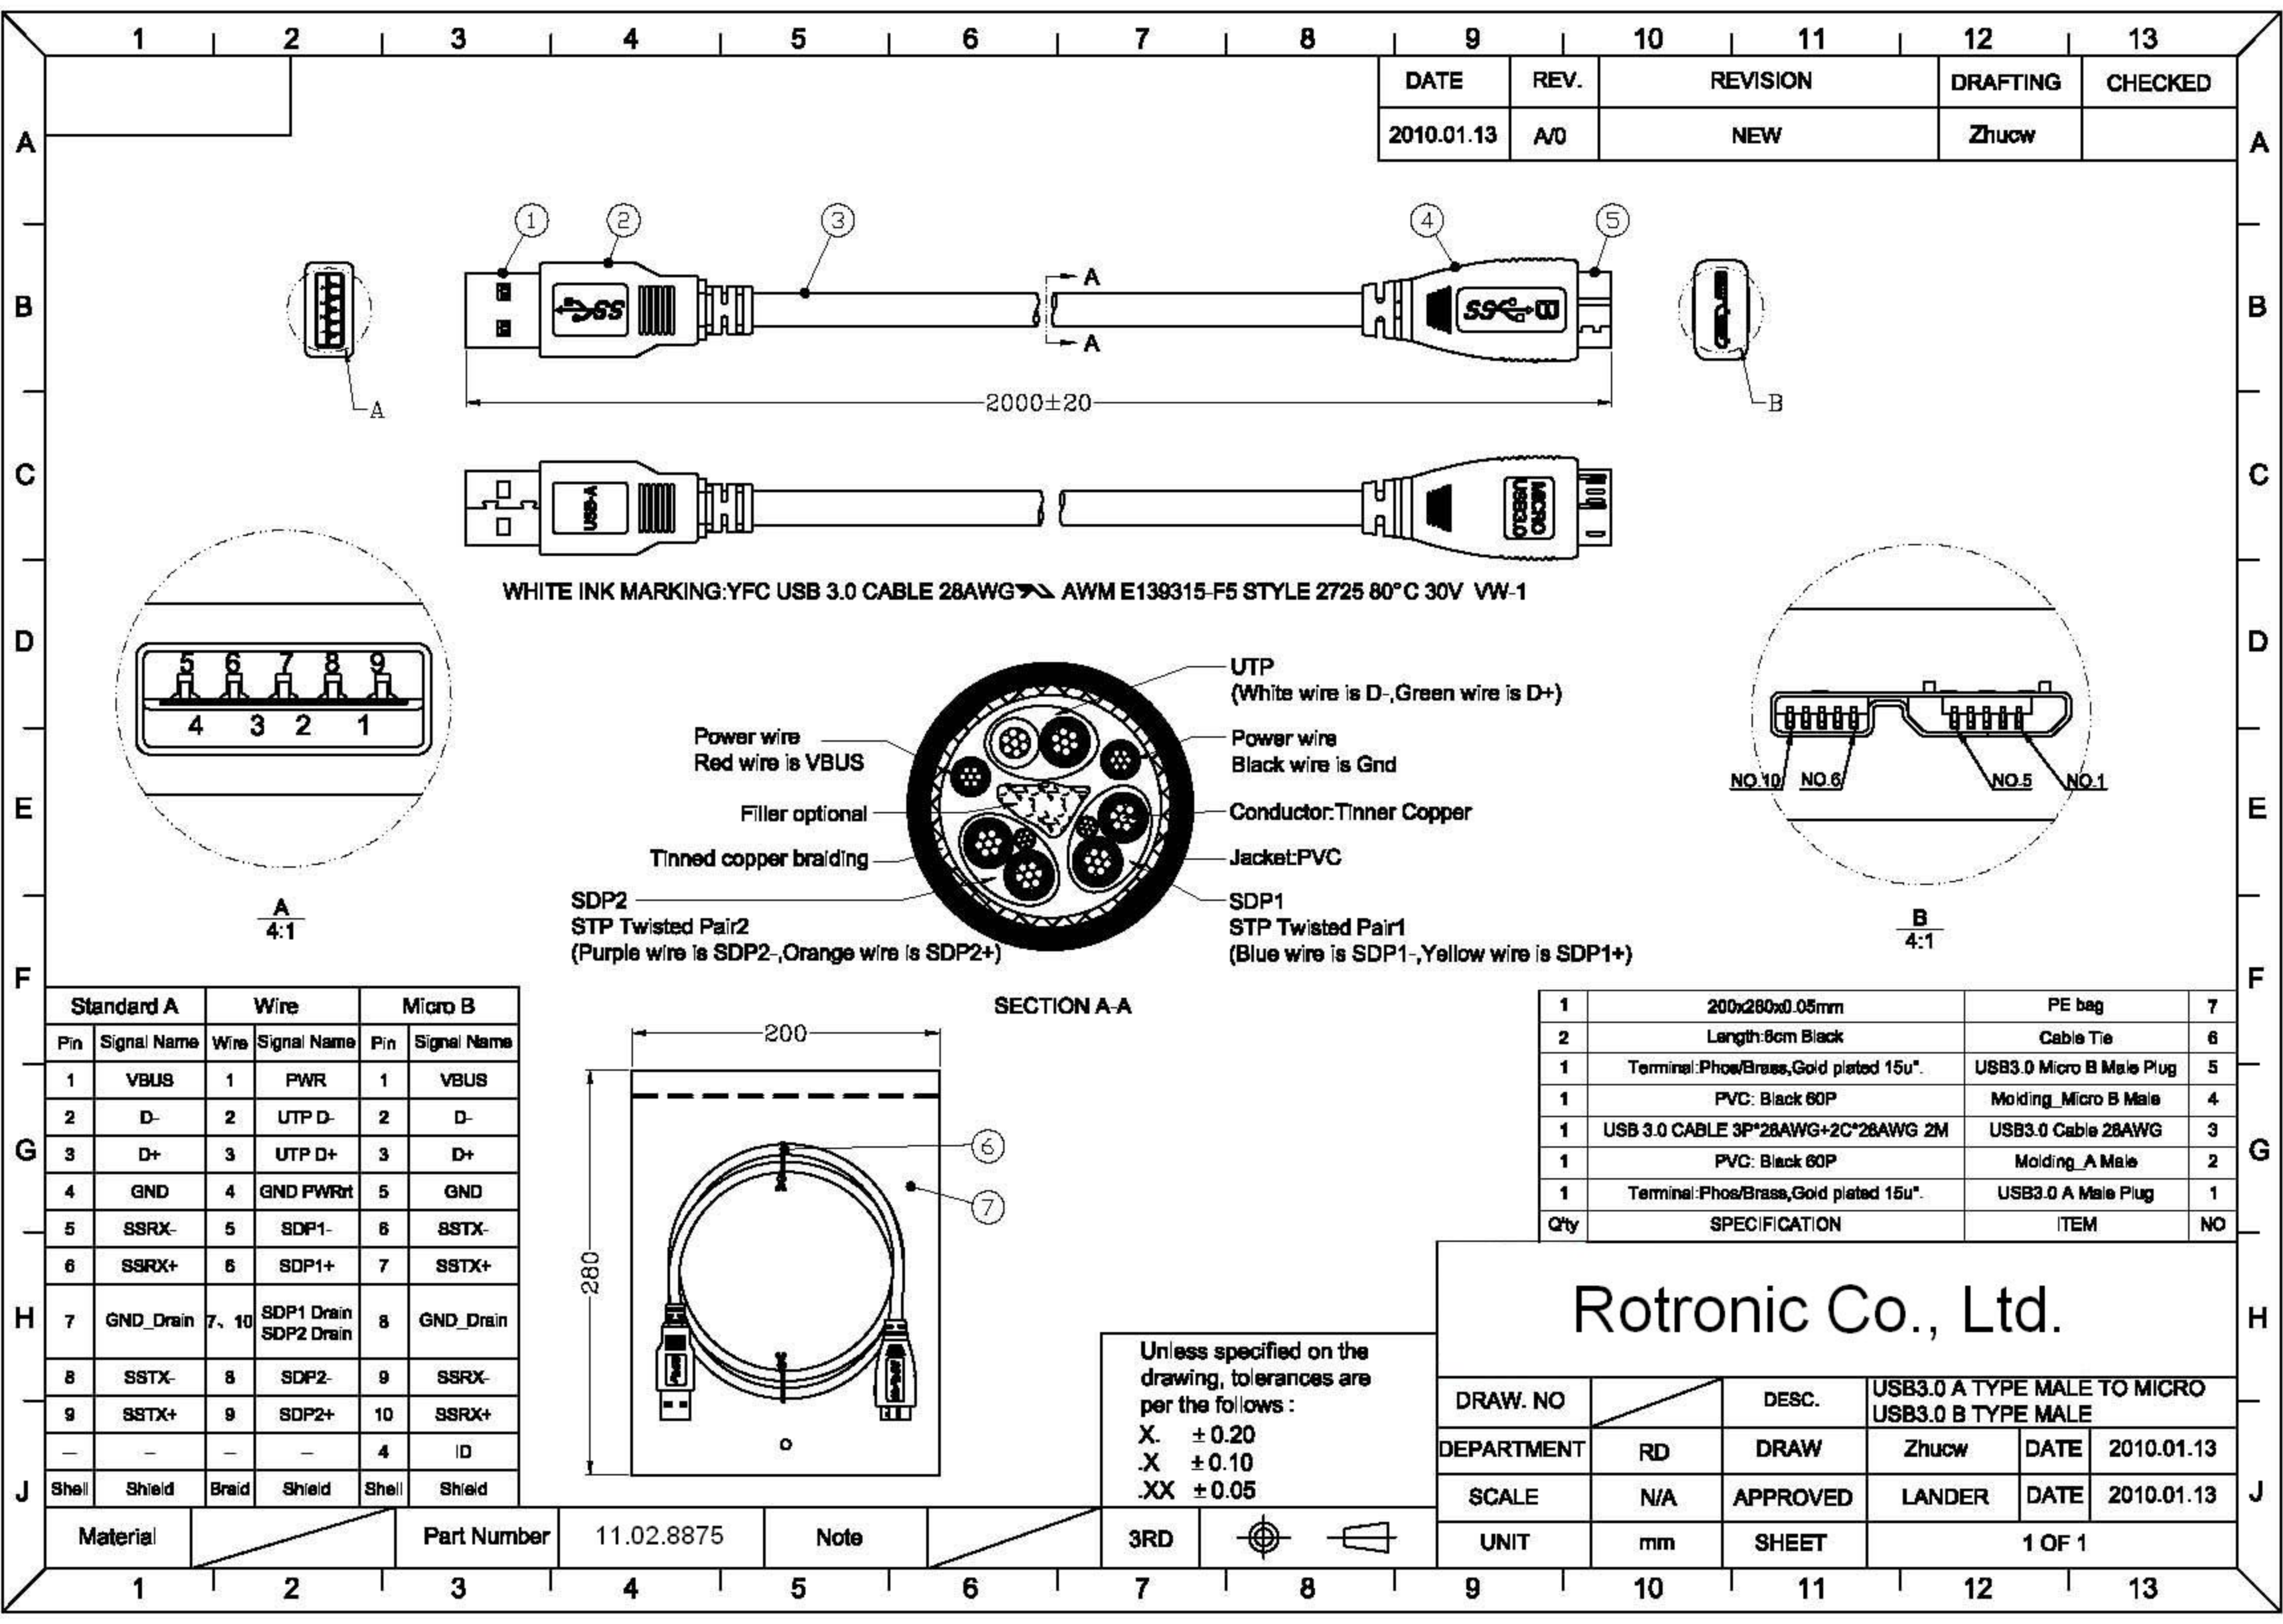


DATE	REV.	REVISION	DRAFTING	CHECKED
2010.01.13	A/0	NEW	Zhuow	

WHITE INK MARKING:YFC USB 3.0 CABLE 28AWG AWM E139315-F5 STYLE 2725 80°C 30V VW-1

UTP
(White wire is D-,Green wire is D+)
Power wire
Red wire is VBUS
Black wire is Gnd
Conductor:Tinner Copper
Jacket:PVC
SDP1
STP Twisted Pair1
(Blue wire is SDP1-,Yellow wire is SDP1+)
SDP2
STP Twisted Pair2
(Purple wire is SDP2-,Orange wire is SDP2+)
Tinned copper braiding
Filler optional

SECTION A-A

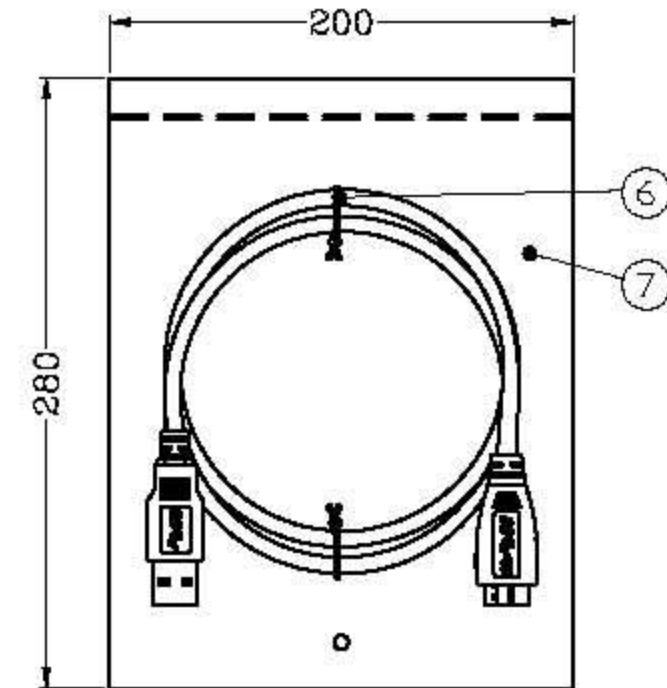

1	200x280x0.05mm	PE bag	7
2	Length:6cm Black	Cable Tie	6
1	Terminal:Phos/Brass,Gold plated 15u"	USB3.0 Micro B Male Plug	5
1	PVC: Black 60P	Molding_Micro B Male	4
1	USB 3.0 CABLE 3P*28AWG+2C*28AWG 2M	USB3.0 Cable 28AWG	3
1	PVC: Black 60P	Molding_A Male	2
1	Terminal:Phos/Brass,Gold plated 15u"	USB3.0 A Male Plug	1
Qty	SPECIFICATION	ITEM	NO

Rotronic Co., Ltd.

DRAW. NO	DESC.	USB3.0 A TYPE MALE TO MICRO USB3.0 B TYPE MALE			
DEPARTMENT	RD	DRAW	Zhuow	DATE	2010.01.13
SCALE	N/A	APPROVED	LANDER	DATE	2010.01.13
UNIT	mm	SHEET	1 OF 1		

Standard A		Wire		Micro B	
Pin	Signal Name	Wire	Signal Name	Pin	Signal Name
1	VBUS	1	PWR	1	VBUS
2	D-	2	UTP D-	2	D-
3	D+	3	UTP D+	3	D+
4	GND	4	GND PWRrt	5	GND
5	SSRX-	5	SDP1-	6	SSTX-
6	SSRX+	6	SDP1+	7	SSTX+
7	GND_Drain	7, 10	SDP1 Drain SDP2 Drain	8	GND_Drain
8	SSTX-	8	SDP2-	9	SSRX-
9	SSTX+	9	SDP2+	10	SSRX+
—	—	—	—	4	ID
Shell	Shield	Braid	Shield	Shell	Shield

Material	Part Number	11.02.8875	Note	3RD	3RD
----------	-------------	------------	------	-----	-----