



Datenblatt - Fiche technique - Data sheet


**11.02.8879**



ROLINE GOLD USB 3.0 Kabel, USB A - Micro B, ST/ST, 2,0 m

ROLINE GOLD Câble USB 3.0, type A-Micro B, M/M, 2,0 m

ROLINE GOLD USB 3.0 Cable, A - Micro B, M/M, 2.0 m

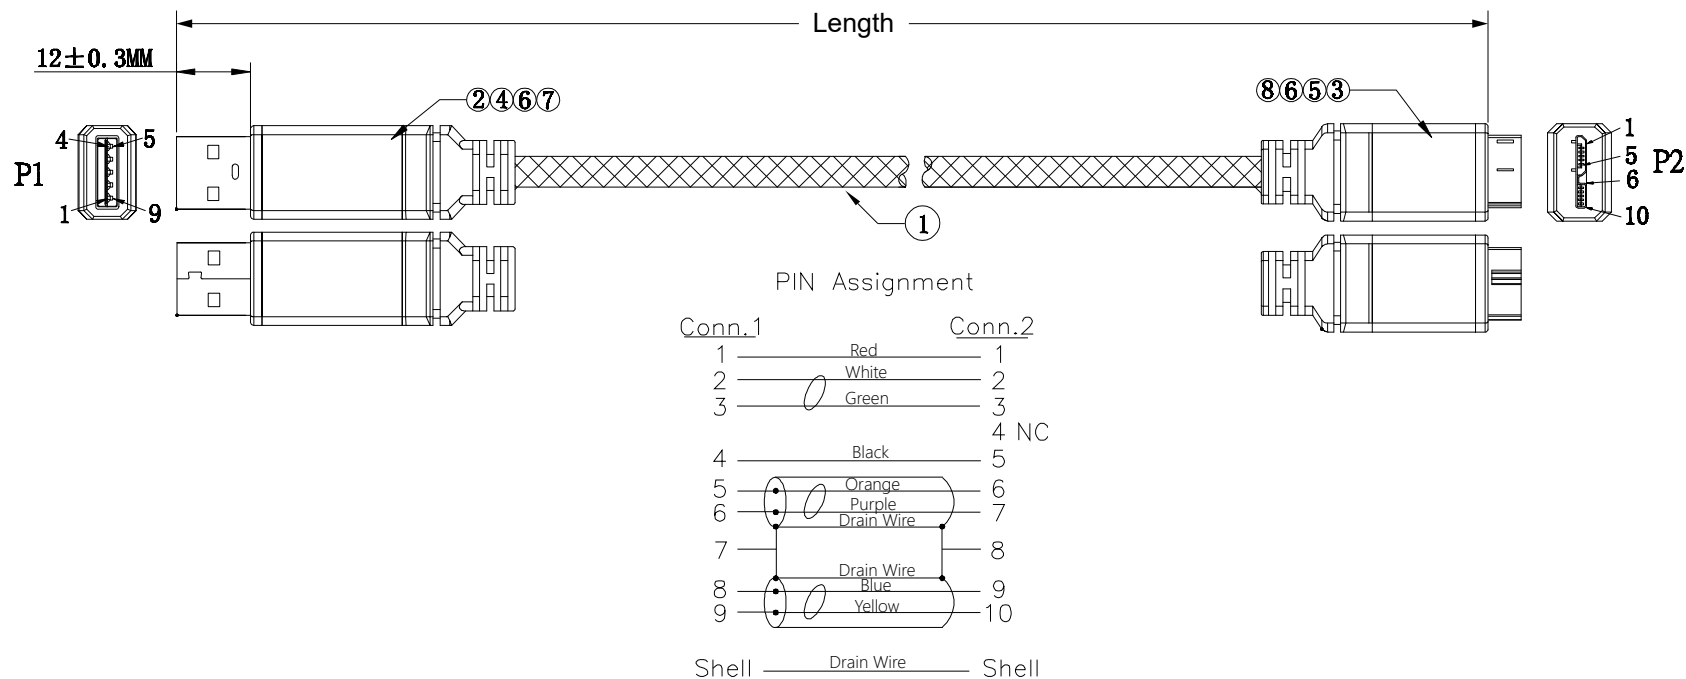

## Specification :

- CA2-3702-001 USB 3.0 Cable: UL2725  
[(28AWG(7/0.127TC)\*1P+DW+AL/MY)\*2P+28AWG\*2C+24AWG(7/0.2TC)\*2C]+AEB(65%  
AL) OD:5.5mm; Jacket: Black Color with BraidPEPVC: 45P, Black
- C01-0037 USB 3.0 AM, Insulator: Blue, Pin Gold Plated 3u"
- C01-0035 USB 3.0 Micro BM with Latch, Insulator: Black, Pin Gold Plated 3u",  
Shell: Gold Plated
- H04-0052 USB 3.0 AM Shell: Gold Plated
- P01-0001 PE
- P01-0000 PVC: 45P, Black
- CM3-0068 USB 3.0 AM Case: Aluminum, Golden Color, L24.2\*W15.9\*H9.1 mm
- CM3-0069 USB 3.0 Micro B Case: Aluminum, Golden Color, L17.4\*W16.0\*H9.43 mm

| P./N.      | Length                               |
|------------|--------------------------------------|
| 11.02.8878 | 800 <sup>+20</sup> <sub>-0</sub> mm  |
| 11.02.8879 | 1800 <sup>+20</sup> <sub>-0</sub> mm |

| REV | DATE | C | NTENTS | F | CHANGE | DESIGNER | TOL ±   |     |     |     |     | V   |     |     |     | APPROVAL | CHECK  | DRAWING | DESIGN | DRAWING NAME | ROLINE USB 3.0 AM to Micro B,<br>28AWG |     |  |
|-----|------|---|--------|---|--------|----------|---------|-----|-----|-----|-----|-----|-----|-----|-----|----------|--------|---------|--------|--------------|----------------------------------------|-----|--|
|     |      |   |        |   |        |          | RANGE   | Pla | Met | Ins | Por | Cab | Pac | Gas | DIS |          |        |         |        | DATE         | PART NO.                               |     |  |
| ①   |      |   |        |   |        |          | 0~6     | 0.1 | 0.1 | 0.1 | 0.2 | 0.5 | 1   | 0.5 | 0.2 | PHILIP   | PHILIP |         | TREE   | 2016-02-17   | 11.02.8878 / 11.02.8879                | ROO |  |
| ②   |      |   |        |   |        |          | 6~30    | 0.1 | 0.1 | .15 | .25 | 1   | 1   | 0.5 | .25 |          |        |         |        |              |                                        |     |  |
| ③   |      |   |        |   |        |          | 30~80   | 0.1 | .15 | 0.2 | 0.3 | 2   | 1.5 | 1   | 0.3 |          |        |         |        |              |                                        |     |  |
| ④   |      |   |        |   |        |          | 80~180  | .15 | .15 | .25 | 0.3 | 2   | 2   | 1   | .45 |          |        |         |        |              |                                        |     |  |
| ⑤   |      |   |        |   |        |          | 180~315 | .15 | 0.2 | 0.3 | 0.4 | 2.5 | 2   | 1   | 0.6 |          |        |         |        |              |                                        |     |  |
| ⑥   |      |   |        |   |        |          | 315~800 | 0.2 | 0.3 | 0.4 | 0.5 | 3   | 3   | 2   | 1.1 |          |        |         |        |              |                                        |     |  |

**SECOMP**