


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION |                        |          |          |
|----------|------------------------|----------|----------|
| REV.     | DESCRIPTION            | DATE     | APPROVED |
| B        | Updated Specifications | 02-09-12 | LY       |
|          |                        |          |          |

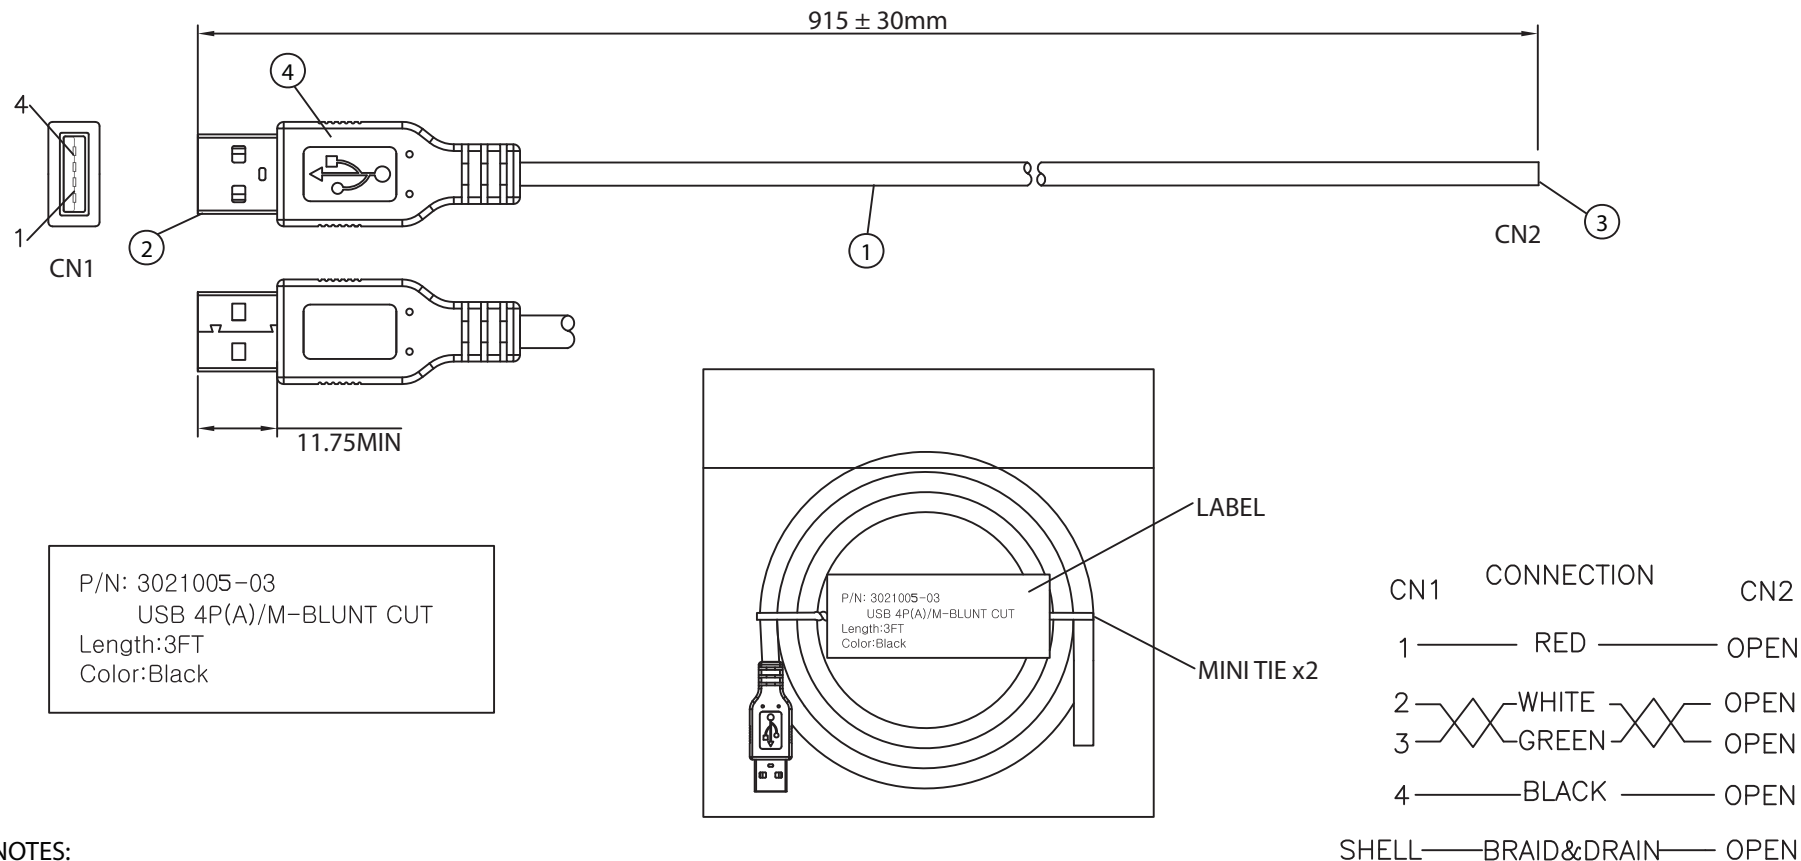

#### NOTES:

- CABLE: UL2725 28/28AWG  
28AWGx1P+28AWGx2C+ AEB(AL) 65%  
OUTER JACKET: BLACK, OD: 4.0 ± 0.2mm
- CONNECTOR: USB A TYPE MALE  
INSULATOR: WHITE PBT  
PIN G/F  
NICKEL PLATED SHELL
- BLUNT CUT
- PVC MOLDED: COLOR V398 45P BLACK
- ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MISS WIRE TEST  
<2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.  
<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- PACKING: 1PC/POLYBAG W/ LABEL

**CONTROLLED**

| Dim range (mm)     |      | Qualtek Electronics Corp.<br>WCI DIVISION                                                          |                |                 |
|--------------------|------|----------------------------------------------------------------------------------------------------|----------------|-----------------|
| Tolerance +/- (mm) |      | Part Number: 3021005-03 <span style="border: 1px solid green; padding: 2px;">RoHS Compliant</span> |                |                 |
| 0-1                | 0.15 | Description: USB 4P(A)/M - BLUNT CUT                                                               |                |                 |
| 1-6                | 0.20 |                                                                                                    |                |                 |
| 6-18               | 0.30 | UNIT: mm                                                                                           | REV. B         | REV. B          |
| 18-50              | 0.50 |                                                                                                    |                |                 |
| 50-120             | 0.70 | Drawn / Date                                                                                       | Checked / Date | Approved / Date |
| 120-250            | 0.90 | B.Grubb<br>01-26-07                                                                                | 01-26-07       | JJH / 01-26-07  |
| 250-500            | 1.20 |                                                                                                    |                |                 |