



#### Features :

- High efficiency 91% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- BS EN/EN61000-6-2(BS EN/EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty

User's Manual



#### GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


#### SPECIFICATION




| MODEL                                   | SDR-120-12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                          | SDR-120-24 |                          | SDR-120-48 |          |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|------------|----------|
| OUTPUT                                  | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 12V                                                                                                                                                                                                                                      |            | 24V                      |            | 48V      |
|                                         | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 10A                                                                                                                                                                                                                                      |            | 5A                       |            | 2.5A     |
|                                         | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 ~ 10A                                                                                                                                                                                                                                  |            | 0 ~ 5A                   |            | 0 ~ 2.5A |
|                                         | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 120W                                                                                                                                                                                                                                     |            | 120W                     |            | 120W     |
|                                         | PEAK CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 15A                                                                                                                                                                                                                                      |            | 7.5A                     |            | 3.75A    |
|                                         | PEAK POWER <small>Note.6</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 180W (3 sec.)                                                                                                                                                                                                                            |            |                          |            |          |
|                                         | RIPPLE & NOISE (max.) <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 100mVp-p                                                                                                                                                                                                                                 |            | 100mVp-p                 |            | 120mVp-p |
|                                         | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 12 ~ 14V                                                                                                                                                                                                                                 |            | 24 ~ 28V                 |            | 48 ~ 55V |
|                                         | VOLTAGE TOLERANCE <small>Note.3</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ± 1.0%                                                                                                                                                                                                                                   |            | ± 1.0%                   |            | ± 1.0%   |
|                                         | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ± 0.5%                                                                                                                                                                                                                                   |            | ± 0.5%                   |            | ± 0.5%   |
|                                         | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ± 1.0%                                                                                                                                                                                                                                   |            | ± 1.0%                   |            | ± 1.0%   |
|                                         | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1500ms, 60ms/230VAC      3000ms, 60ms/115VAC at full load                                                                                                                                                                                |            |                          |            |          |
| HOLD UP TIME (Typ.)                     | 20ms/230VAC      20ms/115VAC at full load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                          |            |                          |            |          |
| INPUT                                   | VOLTAGE RANGE <small>Note.7</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 88 ~ 264VAC                                                                                                                                                                                                                              |            | 124 ~ 370VDC             |            |          |
|                                         | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 47 ~ 63Hz                                                                                                                                                                                                                                |            |                          |            |          |
|                                         | POWER FACTOR (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.93/230VAC                                                                                                                                                                                                                              |            | 0.96/115VAC at full load |            |          |
|                                         | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 89%                                                                                                                                                                                                                                      |            | 91%                      |            | 90.5%    |
|                                         | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 1.4A/115VAC                                                                                                                                                                                                                              |            | 0.7A/230VAC              |            |          |
|                                         | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 35A/115VAC                                                                                                                                                                                                                               |            | 70A/230VAC               |            |          |
|                                         | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <1mA / 240VAC                                                                                                                                                                                                                            |            |                          |            |          |
| PROTECTION                              | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Normally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage<br>>150% rated power, constant current limiting with auto-recovery within 3 seconds and shut down o/p voltage after 3 seconds |            |                          |            |          |
|                                         | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 14 ~ 17V                                                                                                                                                                                                                                 |            | 29 ~ 33V                 |            | 56 ~ 65V |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Protection type : Shut down o/p voltage, re-power on to recover                                                                                                                                                                          |            |                          |            |          |
|                                         | OVER TEMPERATURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 95℃ ± 5℃ (TSW) detect on heatsink of power switch                                                                                                                                                                                        |            |                          |            |          |
|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Protection type : Shut down o/p voltage, recovers automatically after temperature goes down                                                                                                                                              |            |                          |            |          |
| FUNCTION                                | DC OK REALY CONTACT RATINGS (max.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load                                                                                                                                                                                          |            |                          |            |          |
| ENVIRONMENT                             | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | -25 ~ +70℃ (Refer to "Derating Curve")                                                                                                                                                                                                   |            |                          |            |          |
|                                         | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 20 ~ 95% RH non-condensing                                                                                                                                                                                                               |            |                          |            |          |
|                                         | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -40 ~ +85℃, 10 ~ 95% RH                                                                                                                                                                                                                  |            |                          |            |          |
|                                         | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ± 0.03%/℃ (0 ~ 50℃ )                                                                                                                                                                                                                     |            |                          |            |          |
|                                         | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6                                                                                                                             |            |                          |            |          |
| SAFETY & EMC<br><small>(Note 4)</small> | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | UL508, TUV BS EN/EN62368-1, AS/NZS 62368.1, EAC TP TC 004, BSMI CNS14336-1 approved;(meet BS EN/EN60204-1)                                                                                                                               |            |                          |            |          |
|                                         | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC    O/P-DC OK:0.5KVAC                                                                                                                                                                     |            |                          |            |          |
|                                         | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH                                                                                                                                                                               |            |                          |            |          |
|                                         | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B                                                                                                                    |            |                          |            |          |
|                                         | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, BS EN/EN61000-6-2 (BS EN/EN50082-2), BS EN/EN61204-3, heavy industry level, EAC TP TC 020, SEMI F47 approved                                                                |            |                          |            |          |
| OTHERS                                  | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1764.6K hrs min.      Telcordia SR-332 (Bellcore) ; 292.1K hrs min.      MIL-HDBK-217F (25℃)                                                                                                                                             |            |                          |            |          |
|                                         | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 40*125.2*113.5mm (W*H*D)                                                                                                                                                                                                                 |            |                          |            |          |
|                                         | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0.67Kg; 20pcs/14.4Kg/1.16CUFT                                                                                                                                                                                                            |            |                          |            |          |
| NOTE                                    | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.<br>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.<br>6. 3 seconds max., please refer to peak loading curves.<br>7. Derating may be needed under low input voltage. Please check the derating curve for more details.<br>8. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).<br>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a> |                                                                                                                                                                                                                                          |            |                          |            |          |

## ■ Mechanical Specification

Case No.992A Unit:mm

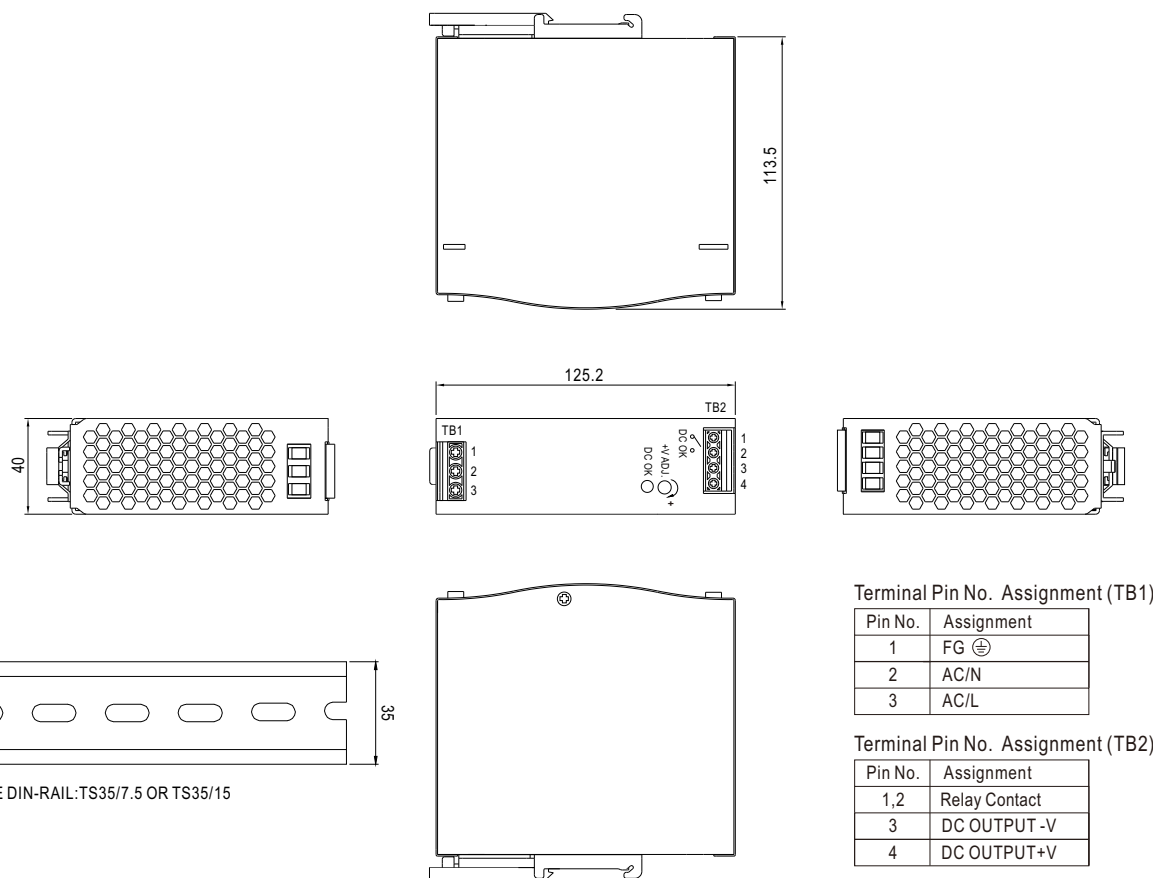



### ■ Block Diagram

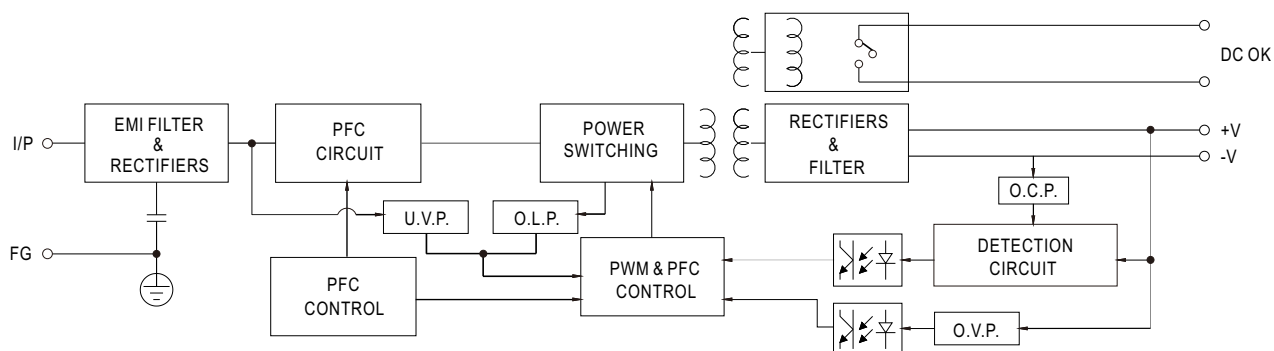


■ DC OK Relay Contact

|                        |                          |
|------------------------|--------------------------|
| Contact Close          | PSU turns on / DC OK.    |
| Contact Open           | PSU turns off / DC Fail. |
| Contact Ratings (max.) | 30V/1A resistive load.   |

### ■ Peak Loading

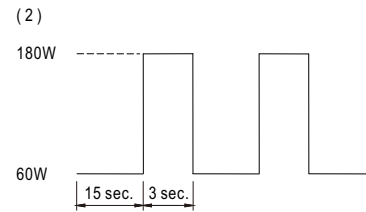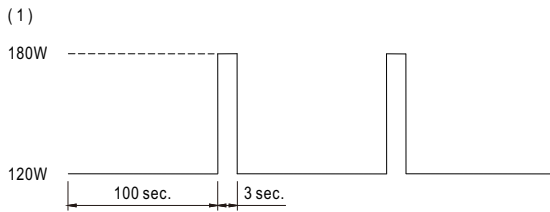

### ■ Derating Curve

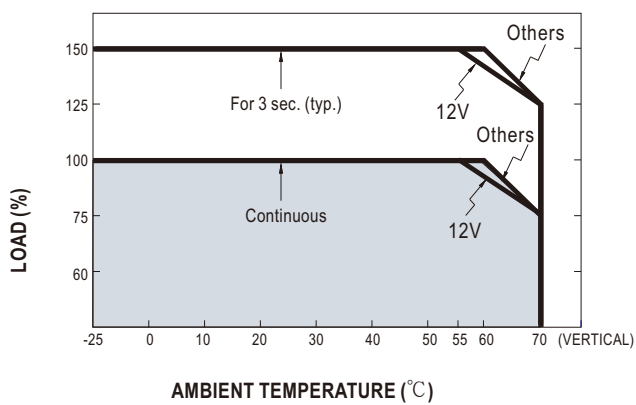

### ■ Output derating VS input voltage

