



#### Features :

- Three-Phase 340 ~ 550VAC wide range input (Dual phase operation possible)
- Width only 110mm
- Built-in active PFC function compliance to BS EN/EN61000-3-2
- High efficiency 94.5% and low power dissipation
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508(industrial control equipment)approved
- BS EN/EN61000-6-2(BS EN/EN50082-2) industrial immunity level
- Current sharing up to 3840W(3+1)
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty



#### GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>




#### SPECIFICATION

| MODEL                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | TDR-960-24                                                                                                                                             |                                                 | TDR-960-48                                                                  |  |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------------------------------------|--|
| OUTPUT                   | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 24V                                                                                                                                                    |                                                 | 48V                                                                         |  |
|                          | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 40A                                                                                                                                                    |                                                 | 20A                                                                         |  |
|                          | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0 ~ 40A                                                                                                                                                |                                                 | 0 ~ 20A                                                                     |  |
|                          | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 960W                                                                                                                                                   |                                                 | 960W                                                                        |  |
|                          | RIPPLE & NOISE (max.) <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 180mVp-p                                                                                                                                               |                                                 | 250mVp-p                                                                    |  |
|                          | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 24 ~ 28V                                                                                                                                               |                                                 | 48 ~ 55V                                                                    |  |
|                          | VOLTAGE TOLERANCE <small>Note.3</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ± 1.0%                                                                                                                                                 |                                                 | ± 1.0%                                                                      |  |
|                          | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ± 0.5%                                                                                                                                                 |                                                 | ± 0.5%                                                                      |  |
|                          | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ± 1.0%                                                                                                                                                 |                                                 | ± 1.0%                                                                      |  |
|                          | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1000ms, 100ms/400VAC      800ms, 100ms/500VAC at full load                                                                                             |                                                 |                                                                             |  |
|                          | HOLD UP TIME (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 12ms / 400VAC      14ms / 500VAC at full load                                                                                                          |                                                 |                                                                             |  |
| INPUT                    | VOLTAGE RANGE <small>Note.4</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Three-Phase 340 ~ 550VAC (Dual phase operation possible) 480 ~ 780VDC                                                                                  |                                                 |                                                                             |  |
|                          | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 47 ~ 63Hz                                                                                                                                              |                                                 |                                                                             |  |
|                          | POWER FACTOR (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | PF≥0.88/400VAC      PF≥0.86/500VAC at full load                                                                                                        |                                                 |                                                                             |  |
|                          | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 94%                                                                                                                                                    |                                                 | 94.5%                                                                       |  |
|                          | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 2A/400VAC      1.4A/500VAC                                                                                                                             |                                                 |                                                                             |  |
|                          | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | COLD START 60A                                                                                                                                         |                                                 |                                                                             |  |
|                          | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <3.5mA / 530VAC                                                                                                                                        |                                                 |                                                                             |  |
| PROTECTION               | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 105 ~ 130% rated output power<br>Protection type : Constant current limiting, unit will shut down after 3 sec. ,re-power on to recover                 |                                                 |                                                                             |  |
|                          | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 29 ~ 33V                                                                                                                                               |                                                 | 56 ~ 65V<br>Protection type : Shut down o/p voltage, re-power on to recover |  |
|                          | OVER TEMPERATURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Shut down o/p voltage, recovers automatically after temperature goes down                                                                              |                                                 |                                                                             |  |
|                          | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | DC OK REALY CONTACT RATINGS (max.)                                                                                                                     | 60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load |                                                                             |  |
| ENVIRONMENT              | CURRENT SHARING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Please refer to function manual                                                                                                                        |                                                 |                                                                             |  |
|                          | WORKING TEMP. <small>Note.5</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -30 ~ +70℃ (Refer to "Derating Curve")                                                                                                                 |                                                 |                                                                             |  |
|                          | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 20 ~ 95% RH non-condensing                                                                                                                             |                                                 |                                                                             |  |
|                          | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | -40 ~ +85℃, 10 ~ 95% RH non-condensing                                                                                                                 |                                                 |                                                                             |  |
|                          | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ±0.03%/℃ (0 ~ 50℃ )                                                                                                                                    |                                                 |                                                                             |  |
| SAFETY & EMC<br>(Note 6) | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6                                           |                                                 |                                                                             |  |
|                          | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UL508, AS/NZS62368.1, EAC TP TC 004 approved, IEC62368-1 CB approved by SIQ; Design refer to BS EN/EN62368-1                                           |                                                 |                                                                             |  |
|                          | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC    O/P-DC OK:0.5KVAC                                                                                   |                                                 |                                                                             |  |
|                          | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH                                                                                             |                                                 |                                                                             |  |
|                          | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020                                                    |                                                 |                                                                             |  |
| OTHERS                   | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, BS EN/EN61000-6-2 (BS EN/EN50082-2), BS EN/EN61204-3, heavy industry level, EAC TP TC 020 |                                                 |                                                                             |  |
|                          | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 647.1K hrs min.    Telcordia SR-332 (Bellcore) ; 59.5K hrs min.    MIL-HDBK-217F (25℃)                                                                 |                                                 |                                                                             |  |
|                          | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 110*125.2*150mm (W*H*D)                                                                                                                                |                                                 |                                                                             |  |
|                          | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 2.47Kg ; 6pcs/15.8Kg/1.47CUFT                                                                                                                          |                                                 |                                                                             |  |
| NOTE                     | 1. All parameters NOT specially mentioned are measured at 400VAC input, rated load and 25℃ of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. Dual phase operation is allowed under certain derating to output load.<br>Please refer to derating curves for details.<br>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power.<br>In case the adjacent device is a heat source, 15mm clearance is recommended.<br>6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.<br>7. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft).<br>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a> |                                                                                                                                                        |                                                 |                                                                             |  |

## Mechanical Specification

Case No.214A Unit:mm

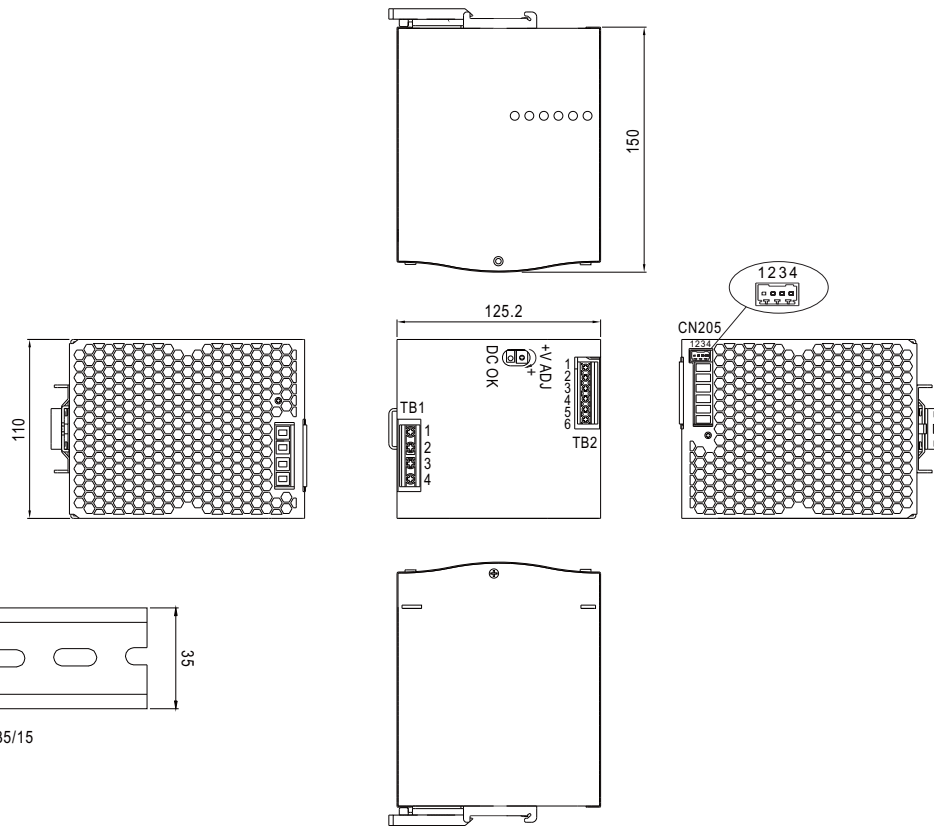

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

Terminal Pin No. Assignment (TB1)

| Pin No. | Assignment |
|---------|------------|
| 1       | FG ⊕       |
| 2       | AC/L3      |
| 3       | AC/L2      |
| 4       | AC/L1      |


Terminal Pin No. Assignment (TB2)

| Pin No. | Assignment   |
|---------|--------------|
| 1,2,3   | DC OUTPUT +V |
| 4,5,6   | DC OUTPUT -V |

Control Pin (CN205) : DINKLE ECH250R-04P or equivalent

| Pin No. | Assignment          | Mating Housing                                                     | Wire Diameter                         |
|---------|---------------------|--------------------------------------------------------------------|---------------------------------------|
| 1       | P-(Current Share)   | DINKLE ESC250V-04P or equivalent (including in the single package) | 0.081~0.517mm <sup>2</sup> (28~20AWG) |
| 2       | P+(Current Share)   |                                                                    |                                       |
| 3,4     | DC OK Relay Contact |                                                                    |                                       |


## Block Diagram

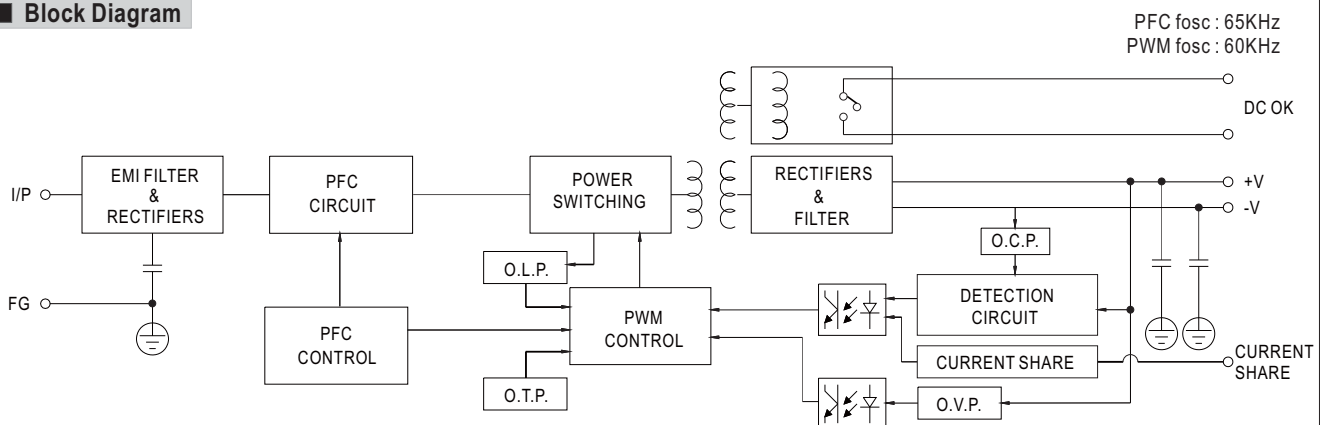


## DC OK Relay Contact

|                        |                          |
|------------------------|--------------------------|
| Contact Close          | PSU turns on / DC OK.    |
| Contact Open           | PSU turns off / DC Fail. |
| Contact Ratings (max.) | 30V/1A resistive load.   |

### Derating Curve

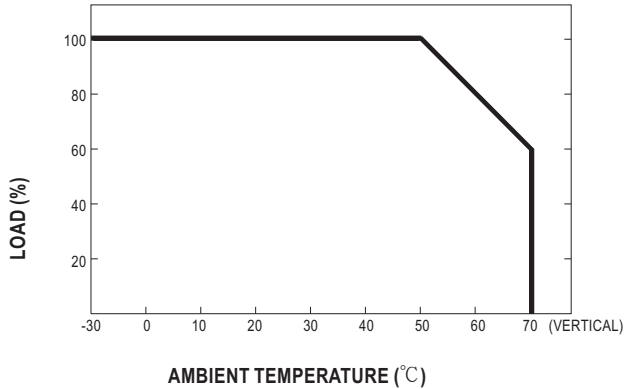

### Output derating VS input voltage

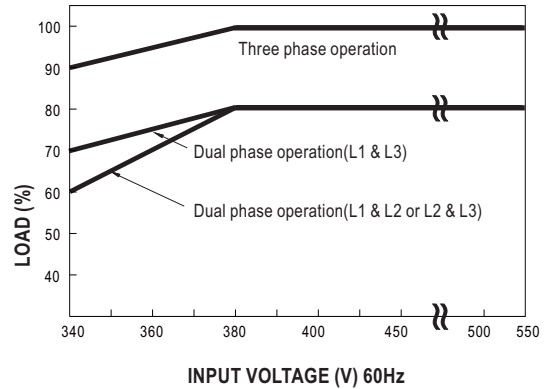

### Function Manual

#### 1. Current sharing

- (1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel).
- (2) Difference of output voltages among parallel units should be less than 0.2V.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (6) When in parallel operation, the minimum output load should be greater than 5% of total output load.  
(Min. load >5% rated current per unit x number of unit)
- (7) In parallel connection, maybe only one unit (master) operate if the total output load is less than 5% of rated load condition.  
The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.
- (8) Some minor noise may be heard at light load condition under parallel operation.  
This is a normal phenomenon and the performance of the PSU will not be influenced.

