

ACT20P
ACT20P-TMR-RTI-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Simple configuration via display (Pro DCDC II), FDT/DTM software or DIP switch
- Release levers simplify handling
- More space in the control cabinet, from 12.5 mm wide for two channels

General ordering data

Type	ACT20P-TMR-RTI-S
Order No.	7760054305
Version	Limit value monitoring, Input: temperature (RTD), Relay output
GTIN (EAN)	6944169747311
Qty.	1 pc(s).

ACT20P

ACT20P-TMR-RTI-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	22.5 mm	Width (inches)	0.886 inch
Height	117 mm	Height (inches)	4.606 inch
Depth	114.3 mm	Depth (inches)	4.5 inch
Net weight	110 g		

Temperatures

Humidity	5–95% rel. humidity, $T_u = 40^\circ\text{C}$, no condensation	Operating temperature, max.	65 °C
Operating temperature, min.	-25 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-25 °C...65 °C
Storage temperature	-40 °C...85 °C		

Input

Number of inputs	1	Sensor	PT100 / 2-/3-/4-wire, PTC: 0...4 kΩ
Temperature input range	Configurable, PT100: -200°C...850 °C		

General data

Accuracy	0.2% FSR, $\leq 2^\circ\text{C}$ (PT100), $\leq 8^\circ\text{C}$ (PTC)	Configuration	With FDT/DTM software
Galvanic isolation	3-way isolator, between input / output / supply	Mounting rail	TS 35
Power consumption	$\leq 100\text{ mA @ }24\text{ VDC}$, $\leq 120\text{ mA @ }24\text{ V AC}$	Step response time	$\leq 500\text{ ms}$
Supply voltage	20...264 VUC	Temperature coefficient	$\leq 100\text{ ppm/K}$

Insulation coordination

EMC standards	IEC 61326-1	Galvanic isolation	3-way isolator, between input / output / supply
Impulse withstand voltage	4 kV (1.2/50 μs)	Insulation voltage	2 kV (Input / Output), 1 min, 50 Hz
Pollution severity	2	Rated voltage	300 V
Surge voltage category	III		

Output (digital)

Alarm function	Alarm range: -200...850 °C, Top and bottom limit values, window range, Hysteresis: 2 °C (adjustable), Alarm delay: 0...10 s	Number of digital outputs	2
Type	2 x 1 - or 1 x 2 changeover contact relay	Max. switching voltage, DC	30 V
Max. switching voltage, AC	250 V	Rated switching current	5 A

ACT20P
ACT20P-TMR-RTI-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	1.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

Classifications

ETIM 6.0	EC002919	eClass 9.1	27-21-01-29
----------	----------	------------	-------------

Product information

Descriptive text accessories	CBX 200
------------------------------	---------

Approvals

Approvals


Downloads




Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	EPLAN
Engineering Data	STEP
Software	WI-Manager, DTM-Library for online installation
User Documentation	Instruction sheet

ACT20P ACT20P-TMR-RTI-S


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Dimensioned drawing

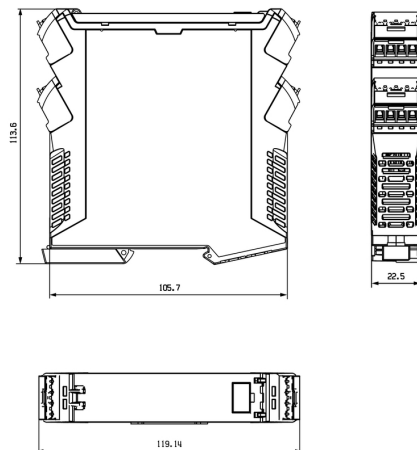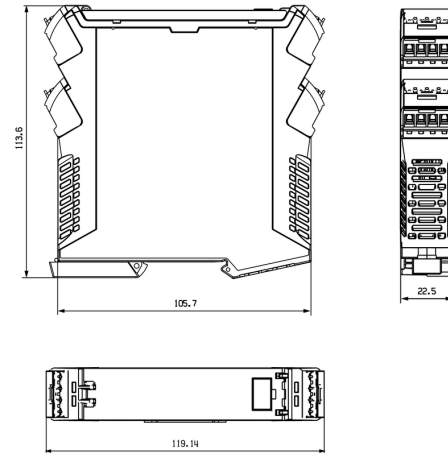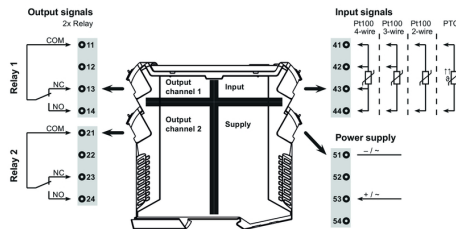

Under-temperature alarm (U)

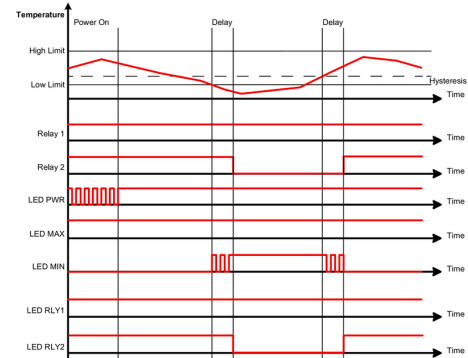

Temperature window alarm (W)

