

4916 Series

6 Digit Non-Reset Counter



The 4916 Series incorporates the latest manufacturing technology together with basic design to achieve high performance over a wide temperature range with low power consumption. These counters can be mounted by two front flange styles, base mount or behind the panel (front mount). The 4916 has UL approvals and can operate over a wide voltage range of DC or AC power.

The compact design and various mounting styles make it the ideal counter for almost all counting applications. This electro-mechanical counter will not lose its count during power failures or from electrical noise.

Key Features

- Low cost, large quantity discounts
- Patented high-performance mechanism
- UL and cUL approved (49 Series)
- Rugged plastic package
- Wide range of voltages available
- Long life

Applications

- Mail Equipment
- Photo Machines
- Vending Machines
- Gaming Machines
- Elevators
- Copy Machines
- Ticket Machines

Specifications

| | |
|-------------------------------|---|
| Display | 6 Digit, white on black, 0.160" figures |
| Operating Voltage ±10% | DC: 5, 12, 24, 48, 110, 125 (2W) AC: 24, 48, 120, 220 (5VA) |
| Reset | None |
| Count Speed | 10 CPS, standard. 50/50 ratio on/off. |
| Max. On Time | Infinite |
| Temperature | Storage: 14°F to 122°F (-10°C to +50°C) Operating: 23°F to 104°F (-5°C to +40°C) |
| Approvals | UL# and cUL# E36690 |
| Termination | UL/cUL wire leads, 11" long, standard |
| Weight | 4.0oz (113g) |

Part Number Ordering Chart

Example:

R 9 - 49 1 6 AD

| | |
|-----------------|-----------------------------------|
| Mounting | _____ |
| B | Bail Mount |
| D | D-Base Mount (Front/H-Base Mount) |
| R | Behind the Panel Mount (Front) |
| P | Panel Mount (Flange 1.81"x1.81") |
| FL | Flange Mount (1.53"x1.8) |
| RV | Combo Front/V-Base Mount |
| OR | Special Metal D - Base Mount |

| | |
|----------------|---------|
| Voltage | _____ |
| 1 | 230 VAC |
| 2 | 115 VAC |
| 3 | 24 VAC |
| 7 | 110 VDC |
| 8 | 24 VDC |
| 9 | 12 VDC |
| 11 | 5 VDC |
| 12 | 125 VDC |
| 23 | 9 VDC |

| | |
|-----------------------|----------------|
| Product Number | _____ |
| 49 | Product Number |


| | |
|--------------|-----------|
| Reset | _____ |
| 1 | Non-reset |

| | |
|---------------------|----------|
| # of Figures | _____ |
| 6 | 6 Figure |


| | |
|---------------|----------------------------------|
| Suffix | _____ |
| Blank | Counter Set at 999800 (Standard) |
| A | Counter Set at 000000 |
| B | Counter Set at 999980 |
| C | 24" Lead Wires |
| D | Diode Suppression |
| E | 16" Lead Wires |

Dimensions


D - D-Base Mount

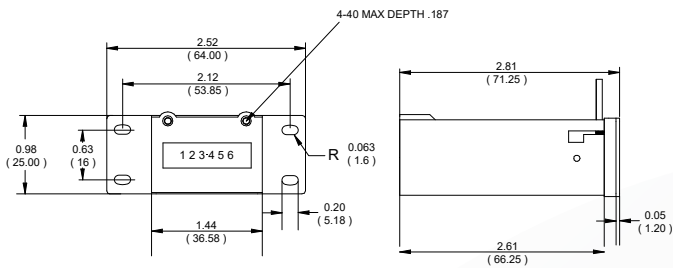


R - Behind The Panel Mount (Front)

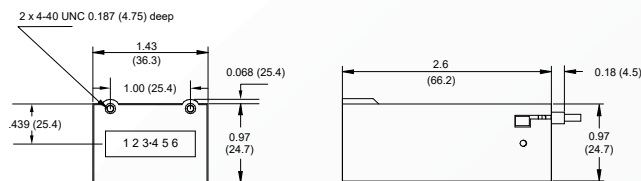


OR - Front / Orenco Base Mount (Front)

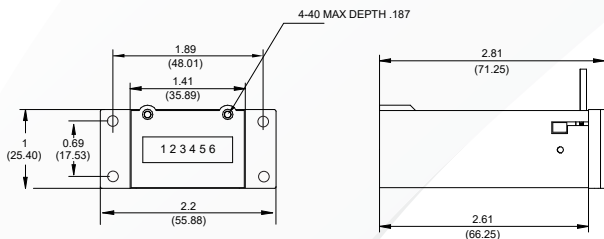

V - V-Base Mount RV- Combo Front / V-Base Mount

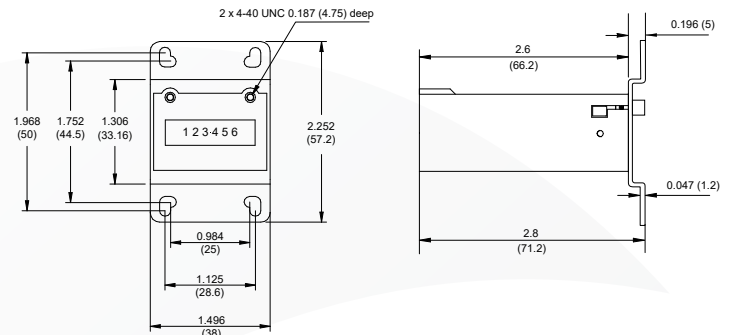

FL - Panel Mount (Flange FL) 1.535 x 1.8 (39 x 45.7)

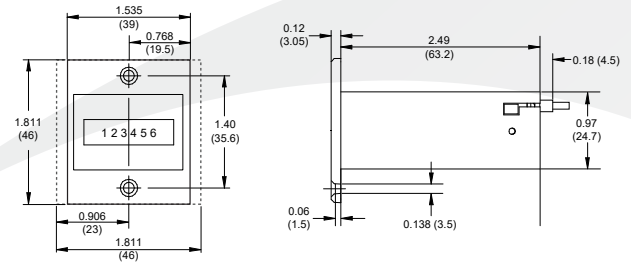

Part Number Ordering Chart

| | |
|-------------------|---|
| FL1-4916 | 230VAC/50HZ, 6 figures, panel mount |
| FL2-4916 | 115VAC, 6 figures, panel mount |
| FL3-4916 | 24VAC, 6 figures, panel mount |
| FL7-4916CD | 110VDC, 6 figures, panel mount, w/diode, 24" LDS |
| FL8-4916D | 24VDC, 6 figures, panel mount, w/diode |
| R11-4916D | 5VDC, 6 figures, front mount, w/diode |
| R2-4916 | 115VAC, 6 figures, rear mount |
| R8-4916 | 24VDC, 6 figures, rear mount |
| R9-4916AD | 12VDC, 6 figures, rear mount, w/diode, set @ 000000 |

| | |
|------------------|---|
| RV1-4916 | 230VAC, 6 figures, front & V-base mount |
| RV2-4916 | 115VAC, 6 figures, front & V-base mount |
| RV3-4916 | 24VAC, 6 figures, front & V-base mount |
| RV8-4916 | 24VDC, 6 figures, front & V-base mount |
| RV9-4916 | 12VDC, 6 figures, front & V-base mount |
| RV11-4916 | 5VDC, 6 figures, front & V-base mount |
| RV2-4916B | 115VAC, 6 figures, V-base mount, set @ 999980 |



Trumeter (Europe)
Pilot Mill
Alfred Street
Bury,
BL9 9EF
Tel: +44 161 674 0960
Email: sales.uk@trumeter.com

Trumeter (The Americas)
702 S. Military Trail
Deerfield Beach, Florida
FL 33442,
USA
Tel: +1 954 725 6699
Email: sales.usa@trumeter.com

Innovative Design Technologies Sdn. Bhd
Lot 5881, Lorong Iks Bukit Minyak 1
Taman Perindustrian Iks, 14000 Bukit Tengah
Penang, Malaysia
Web: www.idtworld.com
Tel: + 604 5015700
Email: sales.my@idtworld.com