


Crystal Resonator

SMD 5032 (5mm × 3.2mm × 0.9mm)

multicompPRO

**RoHS
Compliant**



Application

Used in Bluetooth, wireless communication set, DSC, PDA, mobile phone, USB interface card, etc.


Features

- 2016 size miniature and light SMD crystal resonator with a low profile of 0.5mm
- Wide frequency range from a comparatively low 8MHz up to 48MHz
- High precision and high frequency stability
- Excellent for reducing EMI effect
- Automatic mounting and reflow soldering

Electrical Specifications

Frequency Range	: 8 ~ 48MHz
Frequency Tolerance (at 25°C)	: ±10ppm, ±30ppm
Frequency Stability Over Operating Temperature Range	: ±10ppm, ±30ppm
Operating Temperature Range	: -20°C to +70°C
Shunt Capacitance (C ₀)	: 5pF Max.
Drive Level	: 1 ~ 200μW Max. (100μW Typical)
Load Capacitance	: 10pF, 18pF
Equivalent Series Resistance (ESR)	: 60Ω
Aging (at 25°C)	: ±3ppm / year Max.
Storage Temperature Range	: -55°C ~ +125°C

Diagram

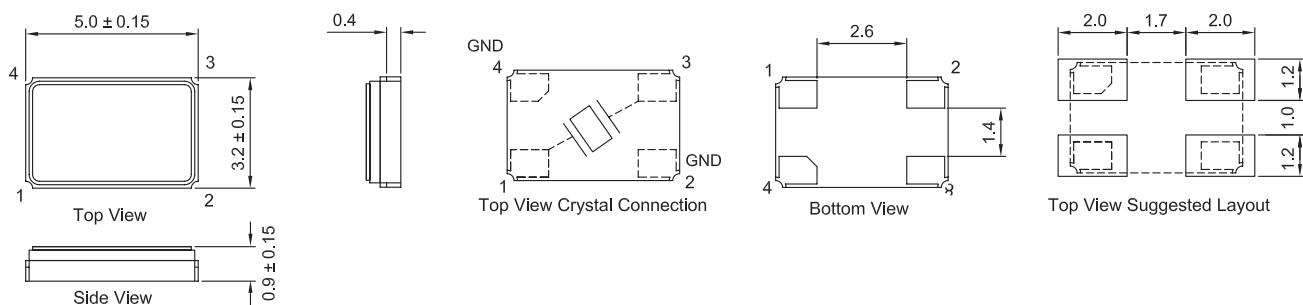

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Crystal Resonator

SMD 5032 (5mm × 3.2mm × 0.9mm)

multicompPRO

Part Number Table

Description	Part Number
Crystal Resonator, 5032, 8MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-8.00-10-10-60-B-10
Crystal Resonator, 5032, 8MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-8.00-10-30-60-B-30
Crystal Resonator, 5032, 8MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-8.00-18-10-60-B-10
Crystal Resonator, 5032, 8MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-8.00-18-30-60-B-30
Crystal Resonator, 5032, 10MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-10.00-10-10-60-B-10
Crystal Resonator, 5032, 10MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-10.00-10-30-60-B-30
Crystal Resonator, 5032, 10MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-10.00-18-10-60-B-10
Crystal Resonator, 5032, 10MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-10.00-18-30-60-B-30
Crystal Resonator, 5032, 11.0592MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-11.0592-10-10-60-B-10
Crystal Resonator, 5032, 11.0592MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-11.0592-10-30-60-B-30
Crystal Resonator, 5032, 11.0592MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-11.0592-18-10-60-B-10
Crystal Resonator, 5032, 11.0592MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-11.0592-18-30-60-B-30
Crystal Resonator, 5032, 12MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-12.00-10-10-60-B-10
Crystal Resonator, 5032, 12MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-12.00-10-30-60-B-30
Crystal Resonator, 5032, 12MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-12.00-18-10-60-B-10
Crystal Resonator, 5032, 12MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-12.00-18-30-60-B-30
Crystal Resonator, 5032, 12.288MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-12.288-10-10-60-B-10
Crystal Resonator, 5032, 12.288MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-12.288-10-30-60-B-30
Crystal Resonator, 5032, 12.288MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-12.288-18-10-60-B-10
Crystal Resonator, 5032, 12.288MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-12.288-18-30-60-B-30
Crystal Resonator, 5032, 13.56MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-13.56-10-10-60-B-10
Crystal Resonator, 5032, 13.56MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-13.56-10-30-60-B-30
Crystal Resonator, 5032, 13.56MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-13.56-18-10-60-B-10
Crystal Resonator, 5032, 13.56MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-13.56-18-30-60-B-30
Crystal Resonator, 5032, 14.31818MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-14.31818-10-10-60-B-10
Crystal Resonator, 5032, 14.31818MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-14.31818-10-30-60-B-30
Crystal Resonator, 5032, 14.31818MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-14.31818-18-10-60-B-10
Crystal Resonator, 5032, 14.31818MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-14.31818-18-30-60-B-30
Crystal Resonator, 5032, 14.7456MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-14.7456-10-10-60-B-10
Crystal Resonator, 5032, 14.7456MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-14.7456-10-30-60-B-30
Crystal Resonator, 5032, 14.7456MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-14.7456-18-10-60-B-10
Crystal Resonator, 5032, 14.7456MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-14.7456-18-30-60-B-30
Crystal Resonator, 5032, 16MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-16.00-10-10-60-B-10
Crystal Resonator, 5032, 16MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-16.00-10-30-60-B-30
Crystal Resonator, 5032, 16MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-16.00-18-10-60-B-10
Crystal Resonator, 5032, 16MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-16.00-18-30-60-B-30
Crystal Resonator, 5032, 16.384MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-16.384-10-10-60-B-10
Crystal Resonator, 5032, 16.384MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-16.384-10-30-60-B-30

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicompPRO

Crystal Resonator

SMD 5032 (5mm × 3.2mm × 0.9mm)

multicompPRO

Description	Part Number
Crystal Resonator, 5032, 16.384MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-16.384-18-10-60-B-10
Crystal Resonator, 5032, 16.384MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-16.384-18-30-60-B-30
Crystal Resonator, 5032, 16.934MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-16.9344-10-10-60-B-10
Crystal Resonator, 5032, 16.934MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-16.9344-10-30-60-B-30
Crystal Resonator, 5032, 16.934MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-16.9344-18-10-60-B-10
Crystal Resonator, 5032, 16.934MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-16.9344-18-30-60-B-30
Crystal Resonator, 5032, 18.432MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-18.432-10-10-60-B-10
Crystal Resonator, 5032, 18.432MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-18.432-10-30-60-B-30
Crystal Resonator, 5032, 18.432MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-18.432-18-10-60-B-10
Crystal Resonator, 5032, 18.432MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-18.432-18-30-60-B-30
Crystal Resonator, 5032, 19.2MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-19.20-10-10-60-B-10
Crystal Resonator, 5032, 19.2MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-19.20-10-30-60-B-30
Crystal Resonator, 5032, 19.2MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-19.20-18-10-60-B-10
Crystal Resonator, 5032, 19.2MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-19.20-18-30-60-B-30
Crystal Resonator, 5032, 20MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-20.00-10-10-60-B-10
Crystal Resonator, 5032, 20MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-20.00-10-30-60-B-30
Crystal Resonator, 5032, 20MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-20.00-18-10-60-B-10
Crystal Resonator, 5032, 20MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-20.00-18-30-60-B-30
Crystal Resonator, 5032, 24MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-24.00-10-10-60-B-10
Crystal Resonator, 5032, 24MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-24.00-10-30-60-B-30
Crystal Resonator, 5032, 24MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-24.00-18-10-60-B-10
Crystal Resonator, 5032, 24MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-24.00-18-30-60-B-30
Crystal Resonator, 5032, 24.576MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-24.576-10-10-60-B-10
Crystal Resonator, 5032, 24.576MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-24.576-10-30-60-B-30
Crystal Resonator, 5032, 24.576MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-24.576-18-10-60-B-10
Crystal Resonator, 5032, 24.576MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-24.576-18-30-60-B-30
Crystal Resonator, 5032, 25MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-25.00-10-10-60-B-10
Crystal Resonator, 5032, 25MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-25.00-10-30-60-B-30
Crystal Resonator, 5032, 25MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-25.00-18-10-60-B-10
Crystal Resonator, 5032, 25MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-25.00-18-30-60-B-30
Crystal Resonator, 5032, 26MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-26.00-10-10-60-B-10
Crystal Resonator, 5032, 26MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-26.00-10-30-60-B-30
Crystal Resonator, 5032, 26MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-26.00-18-10-60-B-10
Crystal Resonator, 5032, 26MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-26.00-18-30-60-B-30
Crystal Resonator, 5032, 27MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-27.00-10-10-60-B-10
Crystal Resonator, 5032, 27MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-27.00-10-30-60-B-30
Crystal Resonator, 5032, 27MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-27.00-18-10-60-B-10
Crystal Resonator, 5032, 27MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-27.00-18-30-60-B-30

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Crystal Resonator

SMD 5032 (5mm × 3.2mm × 0.9mm)

multicompPRO

Description	Part Number
Crystal Resonator, 5032, 27.12MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-27.12-10-10-60-B-10
Crystal Resonator, 5032, 27.12MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-27.12-10-30-60-B-30
Crystal Resonator, 5032, 27.12MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-27.12-18-10-60-B-10
Crystal Resonator, 5032, 27.12MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-27.12-18-30-60-B-30
Crystal Resonator, 5032, 28.63636MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-28.63636-10-10-60-B-10
Crystal Resonator, 5032, 28.63636MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-28.63636-10-30-60-B-30
Crystal Resonator, 5032, 28.63636MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-28.63636-18-10-60-B-10
Crystal Resonator, 5032, 28.63636MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-28.63636-18-30-60-B-30
Crystal Resonator, 5032, 30MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-30.00-10-10-60-B-10
Crystal Resonator, 5032, 30MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-30.00-10-30-60-B-30
Crystal Resonator, 5032, 30MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-30.00-18-10-60-B-10
Crystal Resonator, 5032, 30MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-30.00-18-30-60-B-30
Crystal Resonator, 5032, 32MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-32.00-10-10-60-B-10
Crystal Resonator, 5032, 32MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-32.00-10-30-60-B-30
Crystal Resonator, 5032, 32MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-32.00-18-10-60-B-10
Crystal Resonator, 5032, 32MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-32.00-18-30-60-B-30
Crystal Resonator, 5032, 36MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-36.00-10-10-60-B-10
Crystal Resonator, 5032, 36MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-36.00-10-30-60-B-30
Crystal Resonator, 5032, 36MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-36.00-18-10-60-B-10
Crystal Resonator, 5032, 36MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-36.00-18-30-60-B-30
Crystal Resonator, 5032, 40MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-40.00-10-10-60-B-10
Crystal Resonator, 5032, 40MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-40.00-10-30-60-B-30
Crystal Resonator, 5032, 40MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-40.00-18-10-60-B-10
Crystal Resonator, 5032, 40MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-40.00-18-30-60-B-30
Crystal Resonator, 5032, 48MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 10pF	MCSJK-7I-48.00-10-10-60-B-10
Crystal Resonator, 5032, 48MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 10pF	MCSJK-7I-48.00-10-30-60-B-30
Crystal Resonator, 5032, 48MHz/ ±10ppm, 60Ω, ±10ppm, -20 ~ +70°C, 18pF	MCSJK-7I-48.00-18-10-60-B-10
Crystal Resonator, 5032, 48MHz/ ±30ppm, 60Ω, ±30ppm, -20 ~ +70°C, 18pF	MCSJK-7I-48.00-18-30-60-B-30

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO