



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

PART NUMBER	LENGTH	
	INCHES	MM
U2A00007-12I	12.0	[304.8]
U2A00007-24I	24.0	[609.6]
U2A00007-36I	36.0	[914.4]
U2A00007-72I	72.0	[1828.8]
U2A00007-120I	120.0	[3048.0]




"P1"
USB SERIES "A" PLUG
DOWN EXIT
CONTACTS: 30 μ INCHES
GOLD PLATING

MOLDED PVC HOOD
COLOR: LIGHT GRAY
(PANTONE 400C)

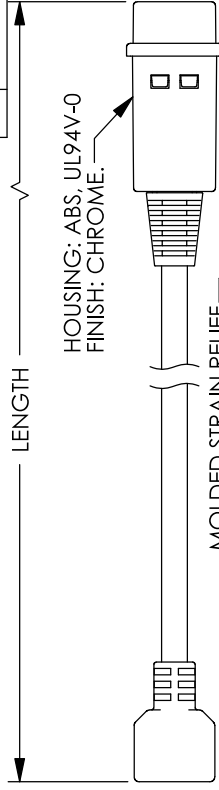


HOUSING: ABS, UL94V-0
FINISH: CHROME.

MOLDED STRAIN RELIEF
COLOR: LIGHT GRAY
(PANTONE 400C)

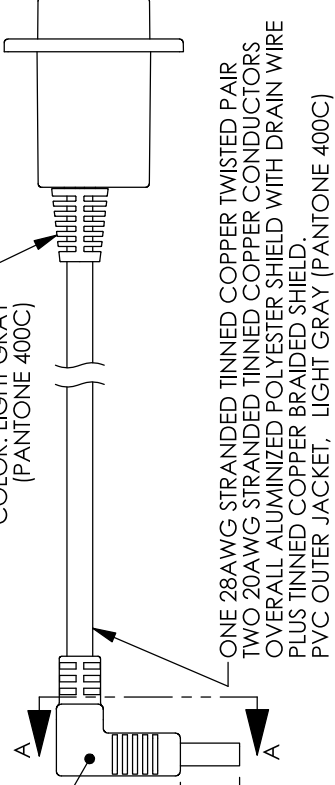


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)

(.463
[11.75]
MIN.)

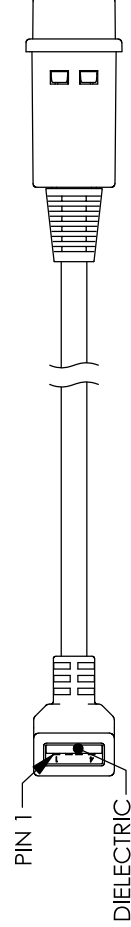

"P1" WIRING DIAGRAM "J1"

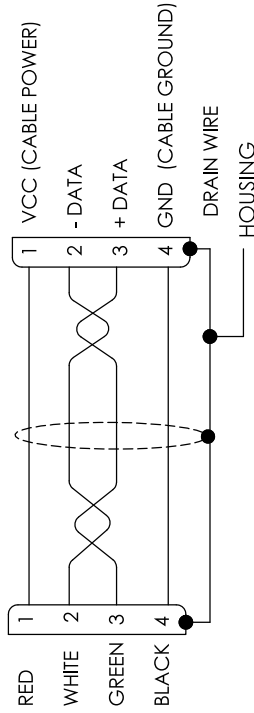

NOTES:


1. OPERATING TEMPERATURE: -10°C TO +70°C
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS Directive)


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/28/17	JLABOY

REVISIONS

LENGTH

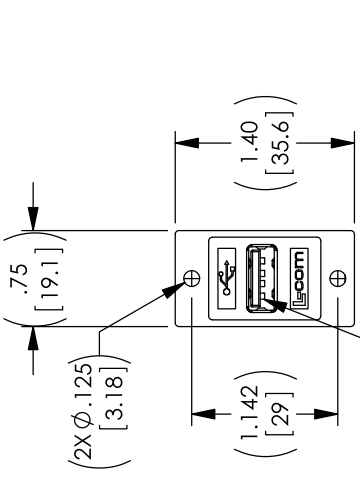

"J1"
USB SERIES "A" RECEPTACLE
BULKHEAD ADAPTOR
CONTACTS: 30 μ INCHES
GOLD PLATING

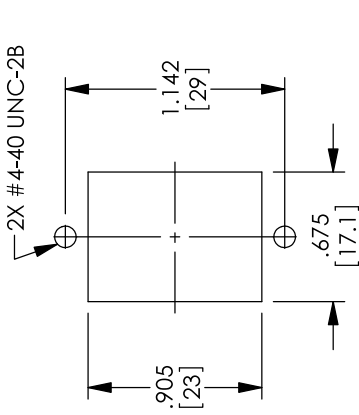

RECOMMENDED
PANEL CUT OUT



50 HIGH STREET
NORTH ANDOVER, MA
01845

L-com Global Connectivity

CATEGORY
USB

PRODUCT DESCRIPTION
USB2.0 A-F PNL MNT/90DN A-M SHLD

SIZE
A 43321

SCALE: NONE

U2A00007

SHEET 1 OF 1