Terminal Block Plug Horizontal Screwless 20.2500M/xx-E

- 150V 4A UL
- UL94-V0
- PA66
- 2.5mm Pin Pitch
- RoHS Compliant
- xx = Number of Poles (available from 2~24 poles)

Technical Data

Pitch	2.5mm
UL Rating	150V 4Amps
IEC Rating	250V 5Amps
Solder Pin	n/a
Wire Range	26-20AWG (0.5mm²)
PCB Hole Diameter	n/a
Screw	n/a
Screw Torque	n/a
Insulation Voltage	AC1250V / 1 Min
Initial Contact Resistance	20mΩ
Insulation Resistance	500MΩ / DC500V
Temperature Range	-40 to +105°C
Max Soldering	+250°C for 5 sec

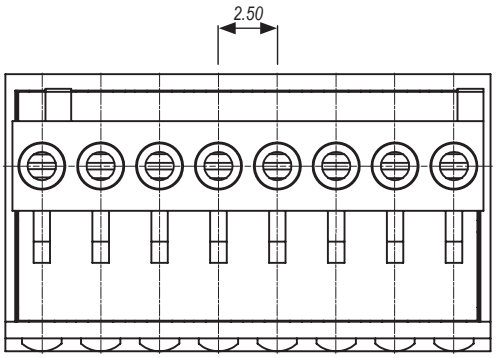

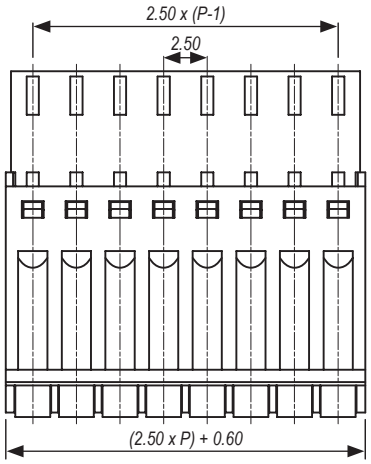

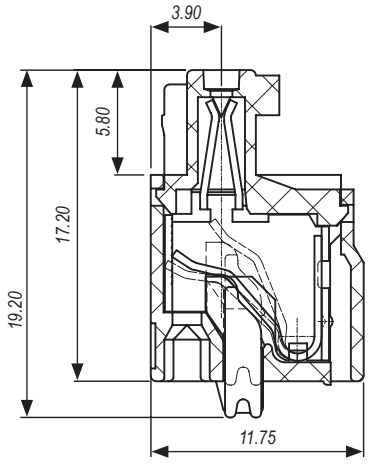

Dimensions shown in mm P = No of Poles

Supplied in green as standard
Other colour options and printing may be available depending upon quantity
Please contact IMO for further information

Errors and omissions excepted. Subject to change without notice.