

Terminal Block Screwless

20.3301M/xx-E


- 300V 4A UL
- UL94-V0
- PA66
- 2.50mm Pin Pitch
- RoHS Compliant
- xx = Number of Poles (available from 2~24 poles)




Technical Data

Pitch	2.50mm
UL Rating	300V 4Amps
IEC Rating	250V 6Amps
Solder Pin	Brass, Tin Plated
Wire Range	28-20AWG (0.5mm ²)
PCB Hole Diameter	1.1mm
Screw	n/a
Screw Torque	n/a
Insulation Voltage	AC2000V / 1 Min
Initial Contact Resistance	20mΩ
Insulation Resistance	500MΩ / DC500V
Temperature Range	-40 to +105°C
Max Soldering	+250°C for 5 sec



PCB Layout

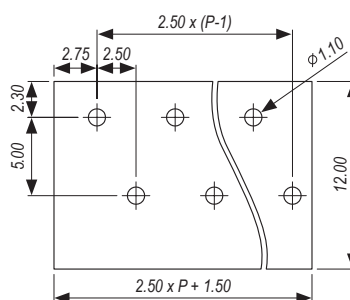

Standard
20.3301M/xx-E



Type 1 Layout
20.3301M/xx-E1

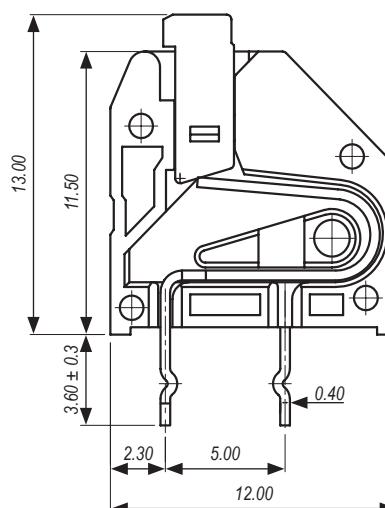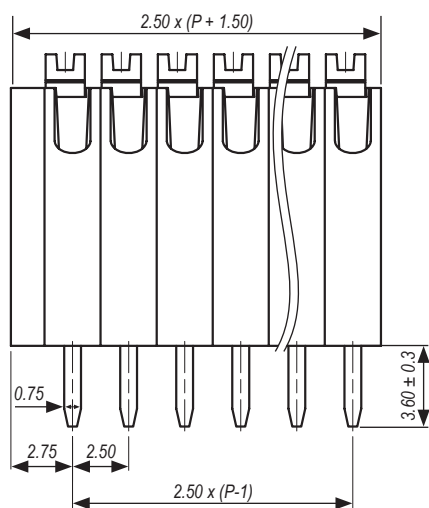

Dimensions shown in mm

P = No of Poles

Supplied in grey as standard

Other colour options and printing may be available depending upon quantity

Please contact IMO for further information