


# Terminal Block Plug




## 20.950MF/xx-E (21.950MF/xx-E)

- 300V 15A UL
- UL94-V0
- PA66
- 5.00mm (5.08mm) Pin Pitch
- RoHS Compliant
- xx = Number of Poles (available from 2~24 poles)

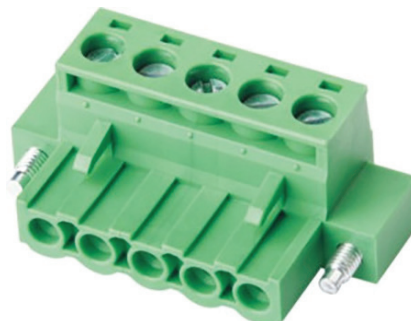

### Technical Data

|                            |                                |
|----------------------------|--------------------------------|
| Pitch                      | 5.00mm (5.08mm)                |
| UL Rating                  | 300V 15Amps                    |
| IEC Rating                 | 450V 20Amps                    |
| Solder Pin                 | n/a                            |
| Wire Range                 | 28-14AWG (2.5mm <sup>2</sup> ) |
| PCB Hole Diameter          | n/a                            |
| Screw                      | M3.0 Steel Zn plated           |
| Screw Torque               | 0.5Nm                          |
| Insulation Voltage         | AC2000V / 1 Min                |
| Initial Contact Resistance | 20mΩ                           |
| Insulation Resistance      | 500MΩ / DC500V                 |
| Temperature Range          | -40 to +105°C                  |
| Max Soldering              | n/a                            |

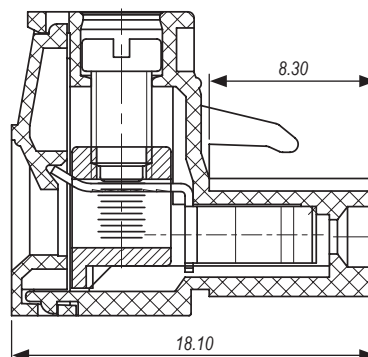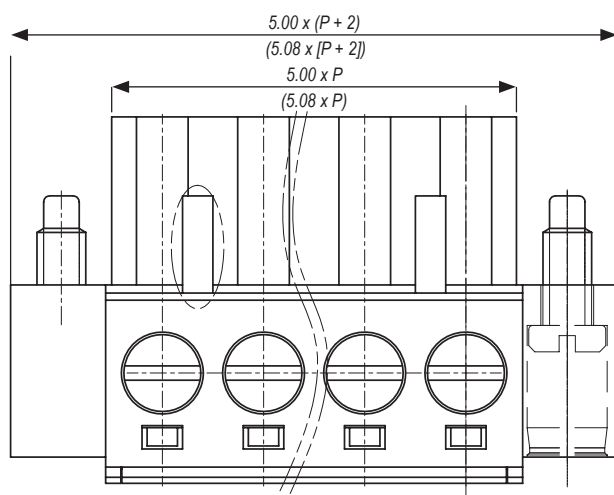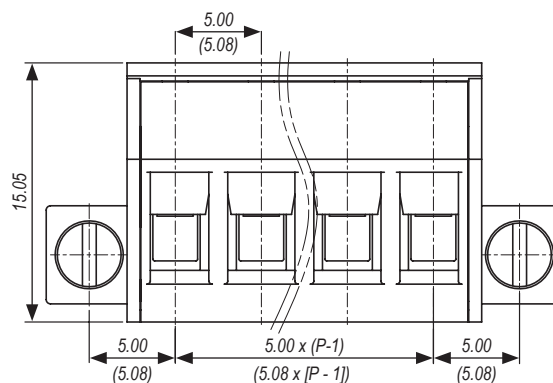

Dimensions shown in mm      P = No of Poles

Supplied in green as standard  
Other colour options and printing may be available depending upon quantity  
Please contact IMO for further information