

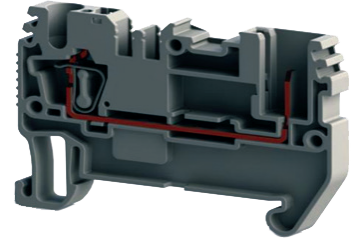


SCP2.5 - Spring Clamp Terminal with Plug Entry

SCP Series - 500V, 24A, 2.5mm²

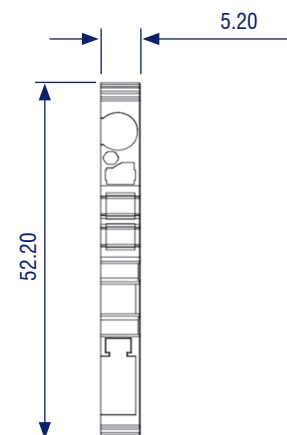

Dimensions & Weight				
Width	5.20mm			
Height (MR35x7.5)	37.30mm			
Length	51.60mm			
Net Weight	6g			
Electrical Ratings		Voltage V~	Current A	Cross-Section
UL	-	-	-	
IEC	500V	24A	0.5-4mm²	
IECEX	-	-	-	
Flammability Rating				
UL94	V0			
Temperature				
Operating Temperature	-60°C to +130°C			
Connection Data				
Conductor Cross-Section Solid (min-max)	0.08-4mm²			
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²			
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²			
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²			
AWG Conductor	AWG 28-12			
Insulation Stripping Length (min-max)	8-10mm			
Connection in Acc. with Standard	IEC 60947-7-1			
Torque (min-max)	N/A			
Technical Data				
Rated Surge Voltage / Pollution Degree	6kV / 3			
Protection Class / Protection Conductor Type	IP0 / -			

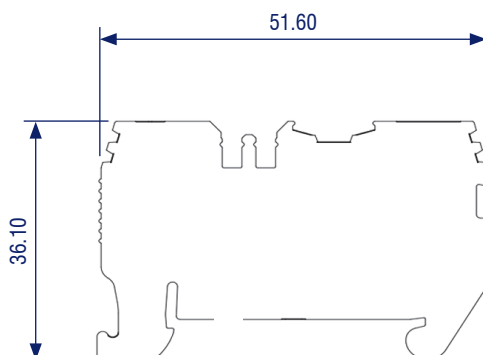

NOTE: Dimensions above are in mm

SCP2.5 - Spring Clamp Terminal with Plug Entry

SCP Series - 500V, 24A, 2.5mm²


Ordering Codes
(please refer to IMO for availability)


■ GREY	SCP2.5GREY	■ GREEN	SCP2.5GREEN
■ RED	SCP2.5RED*	■ YELLOW	SCP2.5YELLOW*
■ BLACK	SCP2.5BLACK*	□ WHITE	SCP2.5WHITE*
■ BLUE	SCP2.5BLUE*	■ ORANGE	SCP2.5ORANGE*

Pack Size

Quantity	50 Pcs
----------	--------




SCP2.5GREY




SCP2.5RED




SCP2.5BLACK




SCP2.5BLUE




SCP2.5GREEN



SCP2.5YELLOW



SCP2.5WHITE



SCP2.5ORANGE

Accessories

End Plates	Part Number		Part Number
 GREY	SCPEP2.5GREY	 GREEN	SCPEP2.5GREEN
 RED	SCPEP2.5RED*	 YELLOW	SCPEP2.5YELLOW*
 BLACK	SCPEP2.5BLACK*	 WHITE	SCPEP2.5WHITE*
 BLUE	SCPEP2.5BLUE*	 ORANGE	SCPEP2.5ORANGE*

Partition
Part Number

<i>Product shown: SP2.5-10BEIGE</i>	SP1GREY (small partition plate)
	SP2.5-10GREY (large partition plate)

Cross Connection
Part Number

<i>Product shown: CCS2.5/3</i>	CCS2.5/2 (2 way)
	CCS2.5/3 (3 way)
	CCS2.5/4 (4 way)
	CCS2.5/10 (10 way)

Plug Connectors
Part Number

<i>Product shown: SCP-PT2.5/1GREY</i>	SCP-PT2.5/1GREY
	SCP-PT2.5/1LGREY
	SCP-PT2.5/1MGREY
	SCP-PT2.5/1RGREY

Markers
Part Number

Blank Marker (white 5x5mm)	Contact IMO for further information
----------------------------	-------------------------------------

End Brackets

 Part Number: ES1
Screw type for MR35 DIN Rail

 Part Number: ES4GREY
Screwless for MR35 DIN Rail

Socket Lock
Socket Lock

 Part Number: SCP-LOCK1
Enables locking of plug to socket
Manual operation required to remove plug

 Part Number: SCP-LOCK2
Enables locking of two plugs to socket. Manual operation required to remove plug

Pin Coding
Cable Holder

 Part Number: SCP-CODE
Enables blocking of terminal to prevent plug mis-connection



 Part Number: SCP-HOLD
Enables secure attachment of cables to terminals


NOTE: Images for illustration purposes only


* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

SCP-HM2.5 - Hole Mounting Terminal

SCP Series - 500V, 24A, 2.5mm² - Single Pole Modular




Dimensions & Weight			
Width	5.20mm		
Height (MR35x7.5)	35.00mm		
Length	16.90mm		
Net Weight	4.5g		
Electrical Ratings	Voltage V~	Current A	Cross-Section
UL	-	-	-
IEC	500V	24A	0.5-4mm²
IECEx	-	-	-
Flammability Rating			
UL94	V0		
Temperature			
Operating Temperature	-60°C to +130°C		
Connection Data			
Conductor Cross-Section Solid (min-max)	0.08-4mm²		
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²		
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²		
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²		
AWG Conductor	AWG 28-12		
Insulation Stripping Length (min-max)	8-10mm		
Connection in Acc. with Standard	IEC 60947-7-1		
Torque (min-max)	N/A		
Technical Data			
Rated Surge Voltage / Pollution Degree	6kV / 3		
Protection Class / Protection Conductor Type	IP0 / -		

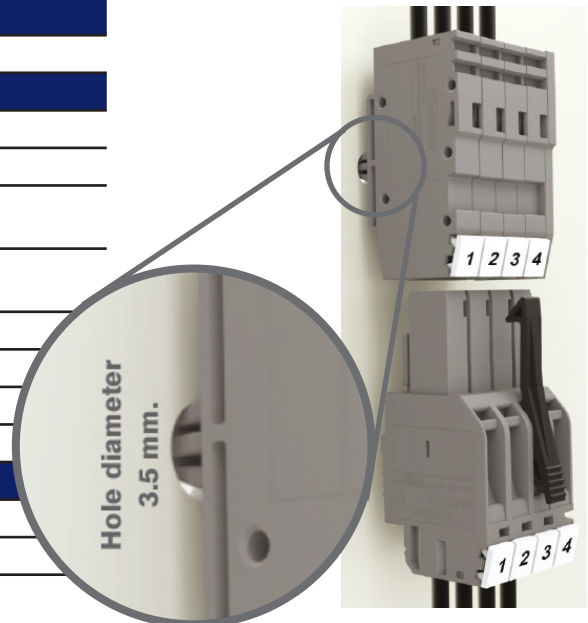

Ordering Codes			
(please refer to IMO for availability)			
■ GREY	SCP-HM2.5GREY	■ GREEN	SCP-HM2.5GREEN
■ RED	SCP-HM2.5RED*	■ YELLOW	SCP-HM2.5YELLOW*
■ BLACK	SCP-HM2.5BLACK*	□ WHITE	SCP-HM2.5WHITE*
■ BLUE	SCP-HM2.5BLUE*	■ ORANGE	SCP-HM2.5ORANGE*
Pack Size			
Quantity	50 Pcs		

Accessories

Markers	Part Number
Blank Marker (white 5x5mm)	Contact IMO for further information
End Plate	EPSCPFH2.5COLOUR


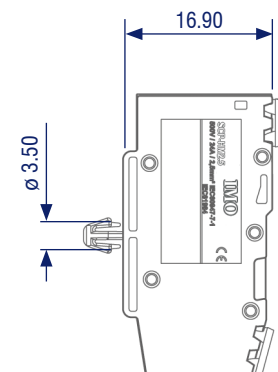


NOTE: Dimensions above are in mm

* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

SCP-FM2.5 - Free Mounting Terminal

SCP Series - 500V, 24A, 2.5mm² - Single Pole Modular

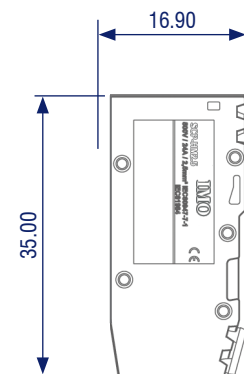

NOTE: Dimensions above are in mm

Dimensions & Weight			
Width	5.20mm		
Height (MR35x7.5)	35.00mm		
Length	16.90mm		
Net Weight	4.5g		
Electrical Ratings	Voltage V~	Current A	Cross-Section
UL	-	-	-
IEC	500V	24A	0.5-4mm²
IECEx	-	-	-
Flammability Rating			
UL94	V0		
Temperature			
Operating Temperature	-60°C to +130°C		
Connection Data			
Conductor Cross-Section Solid (min-max)	0.08-4mm²		
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²		
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²		
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²		
AWG Conductor	AWG 28-12		
Insulation Stripping Length (min-max)	8-10mm		
Connection in Acc. with Standard	IEC 60947-7-1		
Torque (min-max)	N/A		
Technical Data			
Rated Surge Voltage / Pollution Degree	6kV / 3		
Protection Class / Protection Conductor Type	IP0 / -		

Ordering Codes			
(please refer to IMO for availability)			
■ GREY	SCP-FM2.5GREY	■ GREEN	SCP-FM2.5GREEN
■ RED	SCP-FM2.5RED*	■ YELLOW	SCP-FM2.5YELLOW*
■ BLACK	SCP-FM2.5BLACK*	□ WHITE	SCP-FM2.5WHITE*
■ BLUE	SCP-FM2.5BLUE*	■ ORANGE	SCP-FM2.5ORANGE*
Pack Size			
Quantity	50 Pcs		

Accessories

Markers	Part Number
Blank Marker (white 5x5mm)	Contact IMO for further information
End Plate	EPSCPFH2.5COLOUR

* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

SCPEP2.5GREY

End Plate for SCP Push-In Series



Ordering Codes		(please refer to IMO for availability)	
■ GREY	SCPEP2.5GREY	■ GREEN	SCPEP2.5GREEN
■ RED	SCPEP2.5RED*	■ YELLOW	SCPEP2.5YELLOW*
■ BLACK	SCPEP2.5BLACK*	□ WHITE	SCPEP2.5WHITE*
■ BLUE	SCPEP2.5BLUE*	■ ORANGE	SCPEP2.5ORANGE*
■ BEIGE	SCPEP2.5BEIGE*	■ BROWN	SCPEP2.5BROWN*
Pack Size			
Quantity	50 Pcs		

Flammability Rating	
UL94	V0
Construction	
Insulating Material	PA
Technical Data	
Continuous Operating Temperature Max.	130°C
Continuous Operating Temperature Min.	-60°C
Dimensions	
Width	1.0mm
Length	51.4mm
Height	29.6mm



* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

SCP-PT2.5/1 - Plug for SCP Terminal

SCP Series - 500V, 24A, 2.5mm² - Single Pole Non Modular



Dimensions & Weight			
Width	5.20mm		
Height (MR35x7.5)	41.90mm		
Length	17.80mm		
Net Weight	4.5g		
Electrical Ratings	Voltage V~	Current A	Cross-Section
UL	-	-	-
IEC	500V	24A	0.5-4mm²
IECEx	-	-	-
Flammability Rating			
UL94	V0		
Temperature			
Operating Temperature	-60°C to +130°C		
Connection Data			
Conductor Cross-Section Solid (min-max)	0.08-4mm²		
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²		
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²		
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²		
AWG Conductor	AWG 28-12		
Insulation Stripping Length (min-max)	8-10mm		
Connection in Acc. with Standard	IEC 60947-7-1		
Torque (min-max)	N/A		
Technical Data			
Rated Surge Voltage / Pollution Degree	6kV / 3		
Protection Class / Protection Conductor Type	IP0 / -		

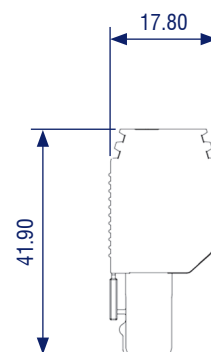

NOTE: Dimensions above are in mm

Ordering Codes			
(please refer to IMO for availability)			
■ GREY	SCP-PT2.5/1GREY	■ GREEN	SCP-PT2.5/1GREEN
■ RED	SCP-PT2.5/1RED*	■ YELLOW	SCP-PT2.5/1YELLOW*
■ BLACK	SCP-PT2.5/1BLACK*	□ WHITE	SCP-PT2.5/1WHITE*
■ BLUE	SCP-PT2.5/1BLUE*	■ ORANGE	SCP-PT2.5/1ORANGE*
Pack Size			
Quantity	50 Pcs		

Accessories

Markers	Part Number
Blank Marker (white 5x5mm)	Contact IMO for further information




* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

SCP-PT2.5/1L - Plug for SCP Terminal

SCP Series - 500V, 24A, 2.5mm² - Single Pole Modular, LHS



Dimensions & Weight			
Width	5.20mm		
Height (MR35x7.5)	41.90mm		
Length	17.80mm		
Net Weight	4.5g		
Electrical Ratings	Voltage V~	Current A	Cross-Section
UL	-	-	-
IEC	500V	24A	0.5-4mm²
IECEx	-	-	-
Flammability Rating			
UL94	V0		
Temperature			
Operating Temperature	-60°C to +130°C		
Connection Data			
Conductor Cross-Section Solid (min-max)	0.08-4mm²		
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²		
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²		
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²		
AWG Conductor	AWG 28-12		
Insulation Stripping Length (min-max)	8-10mm		
Connection in Acc. with Standard	IEC 60947-7-1		
Torque (min-max)	N/A		
Technical Data			
Rated Surge Voltage / Pollution Degree	6kV / 3		
Protection Class / Protection Conductor Type	IP0 / -		

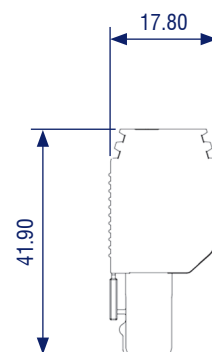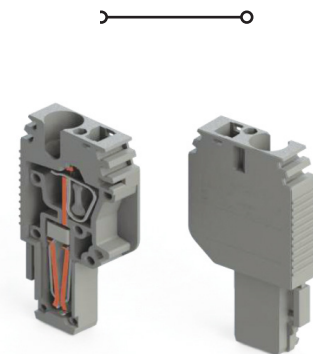

NOTE: Dimensions above are in mm

Ordering Codes		(please refer to IMO for availability)	
 GREY	SCP-PT2.5/1LGREY	 GREEN	SCP-PT2.5/1LGREEN
 RED	SCP-PT2.5/1LRED*	 YELLOW	SCP-PT2.5/1LYELLOW*
 BLACK	SCP-PT2.5/1LBLACK*	 WHITE	SCP-PT2.5/1LWHITE*
 BLUE	SCP-PT2.5/1LBLUE*	 ORANGE	SCP-PT2.5/1LORANGE*
Pack Size			
Quantity	50 Pcs		

Accessories

Markers	Part Number
Blank Marker (white 5x5mm)	Contact IMO for further information

* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

SCP-PT2.5/1M - Plug for SCP Terminal

SCP Series - 500V, 24A, 2.5mm² - Single Pole Modular, Middle






Dimensions & Weight			
Width	5.20mm		
Height (MR35x7.5)	41.90mm		
Length	17.80mm		
Net Weight	4.5g		
Electrical Ratings	Voltage V~	Current A	Cross-Section
UL	-	-	-
IEC	500V	24A	0.5-4mm²
IECEx	-	-	-
Flammability Rating			
UL94	V0		
Temperature			
Operating Temperature	-60°C to +130°C		
Connection Data			
Conductor Cross-Section Solid (min-max)	0.08-4mm²		
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²		
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²		
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²		
AWG Conductor	AWG 28-12		
Insulation Stripping Length (min-max)	8-10mm		
Connection in Acc. with Standard	IEC 60947-7-1		
Torque (min-max)	N/A		
Technical Data			
Rated Surge Voltage / Pollution Degree	6kV / 3		
Protection Class / Protection Conductor Type	IP0 / -		

Ordering Codes				(please refer to IMO for availability)
 GREY	SCP-PT2.5/1MGREY	 GREEN	SCP-PT2.5/1MGREEN	
 RED	SCP-PT2.5/1MRED*	 YELLOW	SCP-PT2.5/1MYELLOW*	
 BLACK	SCP-PT2.5/1MBLACK*	 WHITE	SCP-PT2.5/1MWHITE*	
 BLUE	SCP-PT2.5/1MBLUE*	 ORANGE	SCP-PT2.5/1MORANGE*	
Pack Size				
Quantity	50 Pcs			

Accessories

Markers	Part Number
Blank Marker (white 5x5mm)	Contact IMO for further information

* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

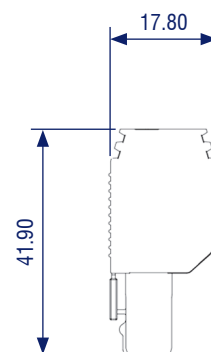

NOTE: Dimensions above are in mm

SCP-PT2.5/1R - Plug for SCP Terminal

SCP Series - 500V, 24A, 2.5mm² - Single Pole Modular, RHS




Dimensions & Weight			
Width	5.20mm		
Height (MR35x7.5)	41.90mm		
Length	17.80mm		
Net Weight	4.5g		
Electrical Ratings	Voltage V~	Current A	Cross-Section
UL	-	-	-
IEC	500V	24A	0.5-4mm²
IECEx	-	-	-
Flammability Rating			
UL94	V0		
Temperature			
Operating Temperature	-60°C to +130°C		
Connection Data			
Conductor Cross-Section Solid (min-max)	0.08-4mm²		
Conductor Cross-Section Stranded (min-max)	0.2-2.5mm²		
Conductor Cross-Section Stranded with Ferrules (min-max)	0.14-2.5mm²		
2 Conductors with same Cross-Section Stranded, Twin Ferrules with plastic sleeve	0.5mm²		
AWG Conductor	AWG 28-12		
Insulation Stripping Length (min-max)	8-10mm		
Connection in Acc. with Standard	IEC 60947-7-1		
Torque (min-max)	N/A		
Technical Data			
Rated Surge Voltage / Pollution Degree	6kV / 3		
Protection Class / Protection Conductor Type	IP0 / -		

Ordering Codes			(please refer to IMO for availability)
 GREY	SCP-PT2.5/1RGREY	 GREEN	SCP-PT2.5/1RGREEN
 RED	SCP-PT2.5/1RRED*	 YELLOW	SCP-PT2.5/1RYELLOW*
 BLACK	SCP-PT2.5/1RBLACK*	 WHITE	SCP-PT2.5/1RWHITE*
 BLUE	SCP-PT2.5/1RBLUE*	 ORANGE	SCP-PT2.5/1RORANGE*
Pack Size			
Quantity	50 Pcs		

Accessories

Markers	Part Number
Blank Marker (white 5x5mm)	Contact IMO for further information

* Supplied in grey & green as standard. For all other colours, minimum order quantities apply. Contact IMO for details.

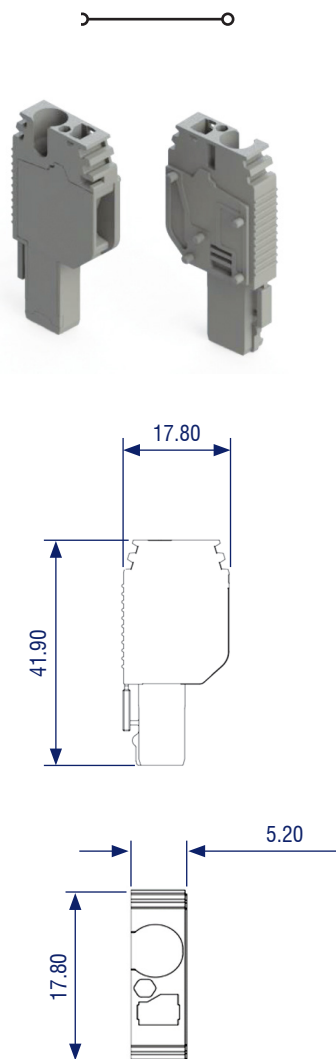

NOTE: Dimensions above are in mm