

Part No. P822601 / P822602

Broadband FR4 Embedded 5G NTN / LTE / LPWA Antenna

698 – 960 MHz / 1525 – 1626.5 MHz / 1710 – 2200 MHz / 1980 – 2200 MHz / 2300 – 2400 MHz / 2500 – 2700 MHz / 3300– 3800 MHz

Supports: 5G, Broadband LTE (OCTA-BAND), LTE CAT-M, NB-IoT, LoRa, Cellular LPWA, RPMA, CBRS, NTN (S-Band/L-Band)



*Mirrored version offered as P822602

Broadband FR4 Embedded 5G NTN / LTE / LPWA Antenna

698 - 960MHz / 1700 - 2700MHz /
3300 - 3800 MHz

Band 255: 1525 – 1626.5 MHz

Band 256/23:1980 – 2200 MHz

KEY BENEFITS

Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

Greater Flexibility with Unique Form Factors

KYOCERA AVX's technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.

Environmental Compliance

Comply with latest RoHS requirements

APPLICATIONS

- Home automation
- Smart metering
- M2M, Industrial devices
- IoT
- Firstnet
- Healthcare (FDA Class I)
- Point of Sale
- Tracking
- Sigfox
- LoRa
- LPWA
- RPMA
- Satellite IoT

KYOCERA AVX's Broadband Embedded 5G NTN / LTE / LPWA SMT antenna utilizes Isolated Magnetic Dipole™ (IMD) technology which address the challenges facing today's product designers. IMD's high performance and isolation characteristics offer better connectivity and minimal interference. Mirrored version variant offered as P822602.

Stays in Tune

KYOCERA AVX's antennas use patented IMD technology in many antenna configurations to provide high performance. IMD antennas requires a smaller design keep-out area, carry lower program development risk which yields a quicker time-to-market, without sacrificing RF performance.

Electrical Specifications

Typical P822601/P822602 performance 140 x 50 mm PCB

Frequency (MHz)	698-960	1710-2200	2500-2700 (B7)	2300-2400 (B40)	3300-3800 (n78)	Including NTN Bands n23/n255/n256
Peak Gain	2.6 dBi	4.4 dBi	3.4 dBi	1.8 dBi	2.8 dBi	
Average Efficiency	68%	76%	52%	46%	59%	
VSWR Match	< 2.5:1			< 3.0:1	< 2.5:1	
Polarization	Linear					
Power Handling	2 Watt CW					
Feed Point Impedance	50 Ω unbalanced					
Additional Resources	Download Application File and Simulation Files					

Refer to Appendix 1

Mechanical Specifications & Ordering Part Number

Ordering Part #	P822601	P822602
Dimensions (mm)	49.6 x 8.0 x 3.2	49.6 x 8.0 x 3.2
Mounting Type	SMT (P&P)	
Variant	P822602 : Mirrored version of P822601	
Weight (grams)	2.63	
Packaging	Tape and Reel	
Storage Temperature/ Humidity (Sealed shipping package)	+5°C to +35°C 45~75%	
Operating Temperature	-40 to +85 C	
Demo Board	P822601-01 (P822601) P822602-01 (P822602)	
Additional Resources	Download DXF, Gerber and 3D FIT Files	

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

LTE Bands covered by (P822601/P822602)


LTE Band	Frequency Band (MHz)	Uplink (UL) (MHz)	Downlink (DL) (MHz)	Region	Covered
1	2100	1920 - 1980	2110 - 2170	Global	Yes
2	1900	1850 - 1910	1930 - 1990	NAM	
3	1800	1710 - 1785	1805 - 1880	Global	
4	1700	1710 - 1755	2110 - 2155	NAM	
5	850	824 - 849	869 - 894	NAM	
6	850	830 - 840	875 - 885	APAC	
7	2600	2500 - 2570	2620 - 2690	EMEA	
8	900	880 - 915	925 - 960	Global	
9	1800	1749.9 - 1784.9	1844.9 - 1879.9	APAC	
10	1700	1710 - 1770	2110 - 2170	NAM	No
11	1500	1427.9 - 1447.9	1475.9 - 1495.9	Japan	
12	700	699 - 716	729 - 746	NAM	Yes
13	700	777 - 787	746 - 756	NAM	
14	700	788 - 798	758 - 768	NAM	
17	700	704 - 716	734 - 746	NAM	
18	850	815 - 830	860 - 875	Japan	
19	850	830 - 845	875 - 890	Japan	
20	800	832 - 862	791 - 821	EMEA	No
21	1500	1447.9 - 1462.9	1495.9 - 1510.9	Japan	
22	3500	3410 - 3490	3510 - 3590	EMEA	Yes
23	2000	2000 - 2020	2180 - 2200	NAM	No
24	1600	1626.5 - 1660.5	1525 - 1559	NAM	Yes
25	1900	1850 - 1915	1930 - 1995	NAM	
26	850	814 - 849	859 - 894	NAM	
27	850	807 - 824	852 - 869	NAM	
28	700	703 - 748	758 - 803	APAC,EU	
29	700	N/A	717 - 728	NAM	
30	2300	2305 - 23151	2350 - 2360	NAM	No
31	450	452.5 - 457.5	462.5 - 467.5	Global	
32	1500	N/A	1452 - 1496	EMEA	Yes
33	1900	1900 - 1920			
34	2000	2010 - 2025			
35	1850	1850 - 1910			
36	1900	1930 - 1990			
37	1900	1910 - 1930			
38	2600	2570 - 2620			
39	1900	1880 - 1920			
40	2300	2300 - 2400			
41	2500	2496 - 2690			
42	3500	3400 - 3600			
43	3700	3600 - 3800			

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Dimensions (P822601)

Typical antenna dimensions (mm)

Part Number	A	B	C
P822601	49.6 ± 0.2	8.0 ± 0.2	3.2 ± 0.32

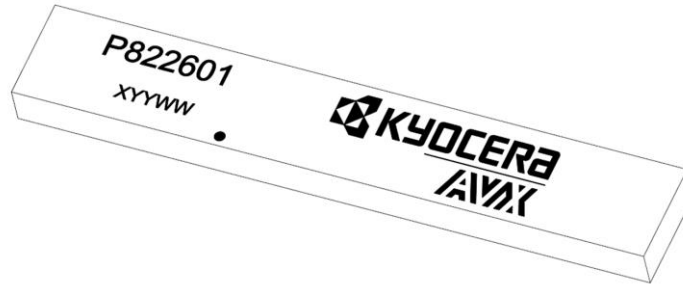


Top View

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad



Front View/Height

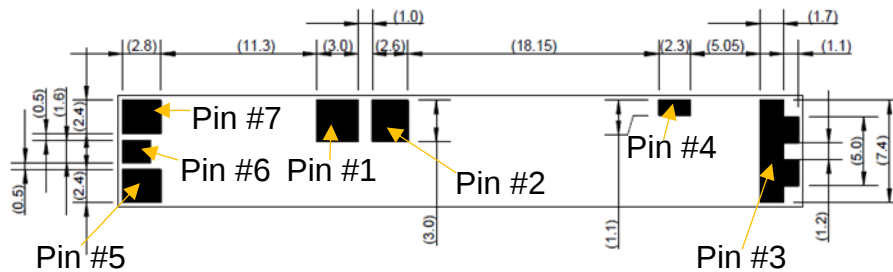


Bottom View

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Dimensions (P822602)


Typical antenna dimensions (mm)

Part Number	A	B	C
P822602	49.6 ± 0.2	8.0 ± 0.2	3.2 ± 0.32

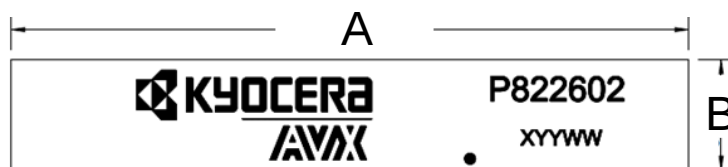


Top View

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

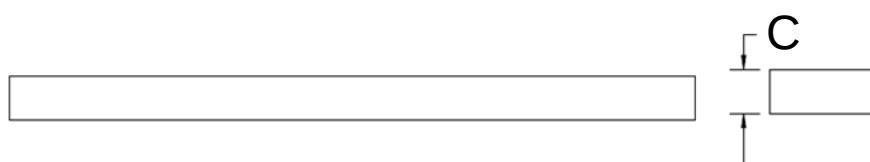

Front View/Height

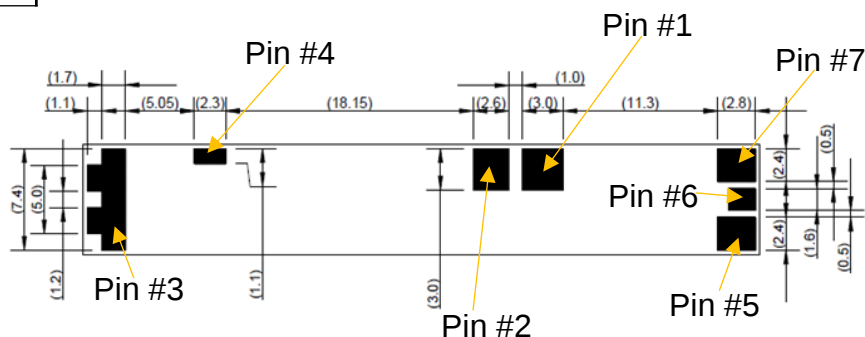


Bottom View

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR and Efficiency Plots

Typical P822601/P822602 performance 140 x 50 mm PCB


Low Band VSWR

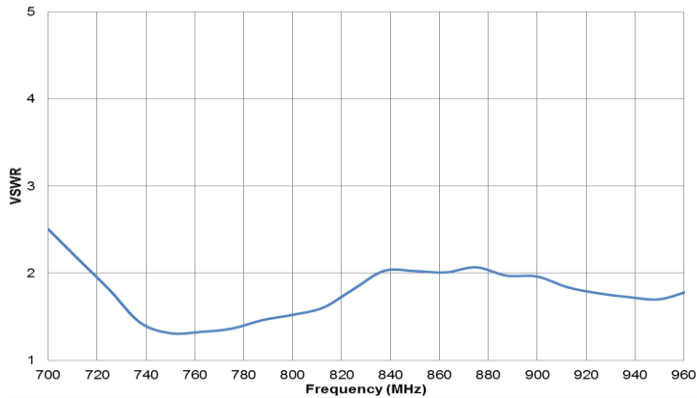


Low Band Efficiency

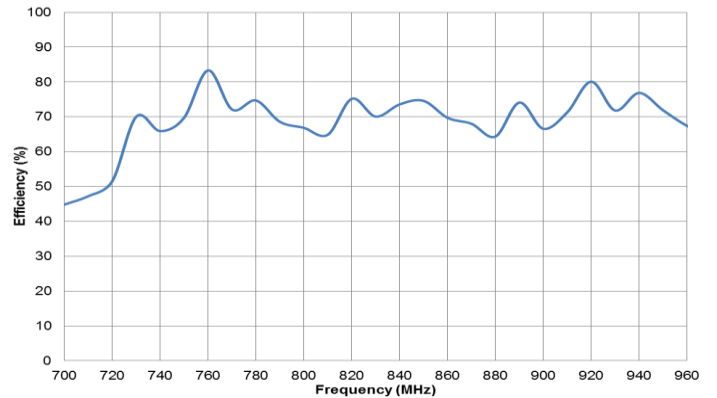


Mid Band VSWR

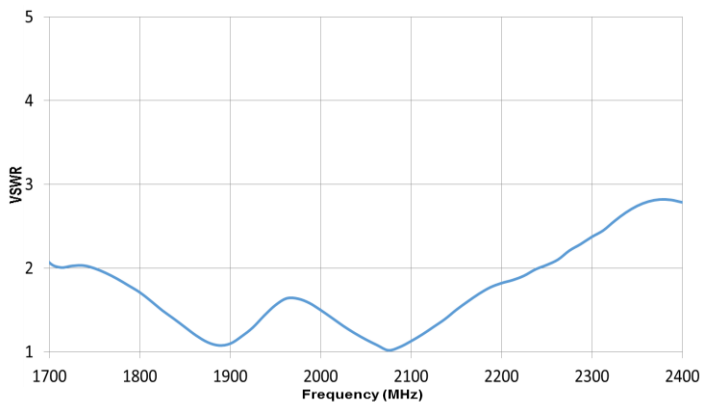


Mid Band Efficiency

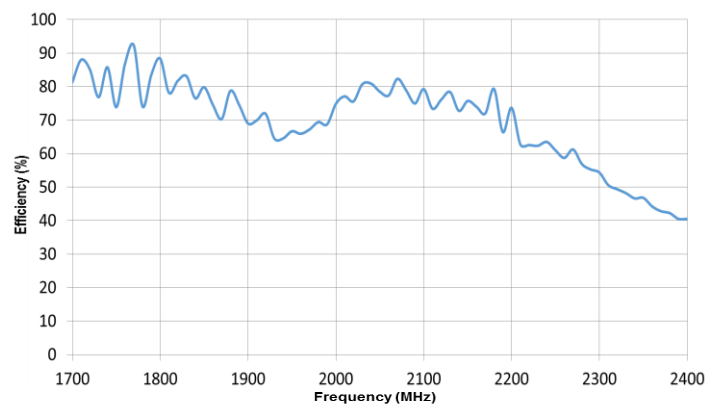

High Band VSWR

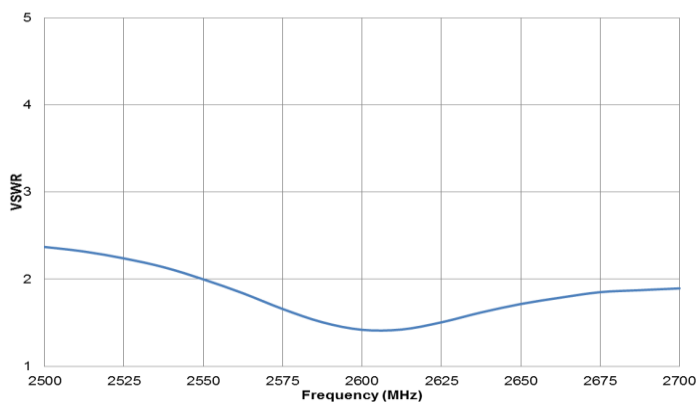

High Band Efficiency

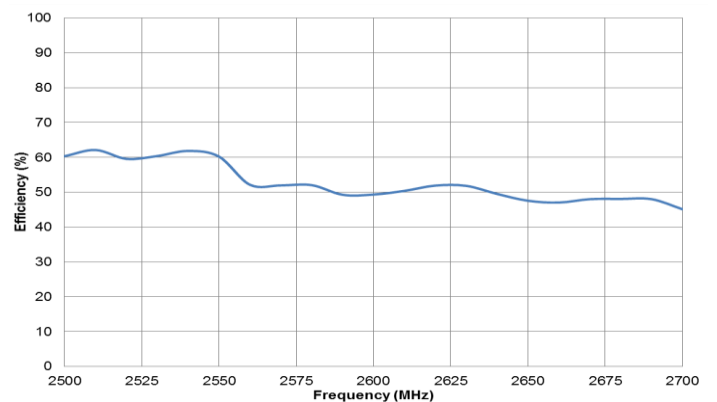


P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR and Efficiency Plots

Typical P822601/P822602 performance 140 x 50 mm PCB


Band 40 VSWR

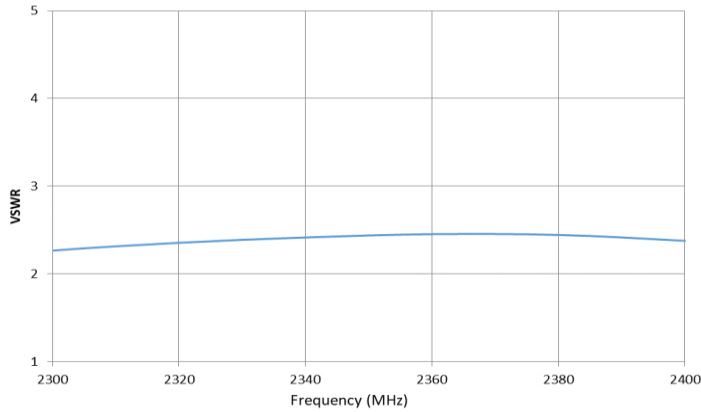


Band 40 Efficiency

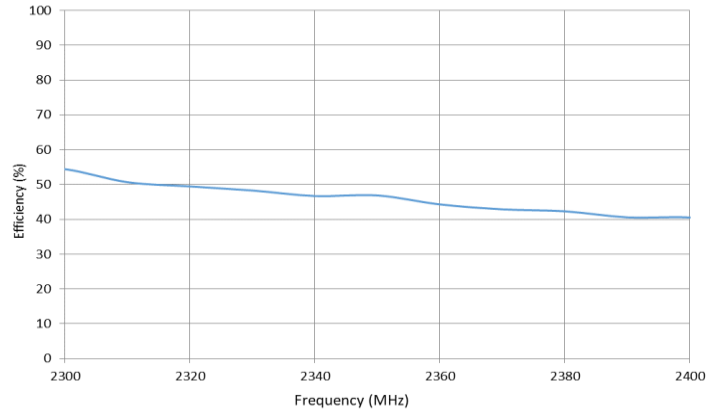

n78 VSWR

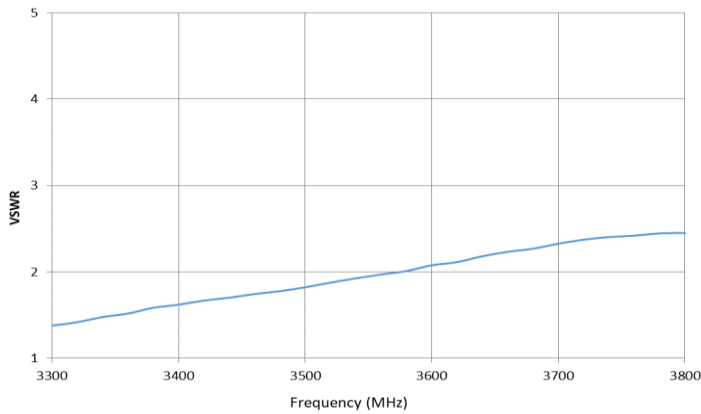


n78 Efficiency

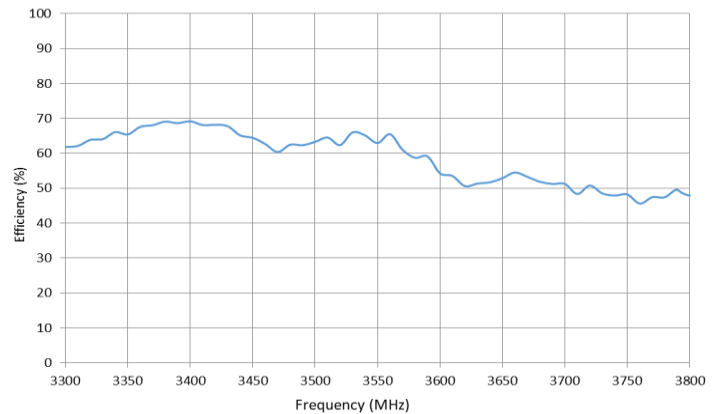




P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns – Low / High Band (LTE)




Typical P822601/P822602 performance 140 x 50 mm PCB

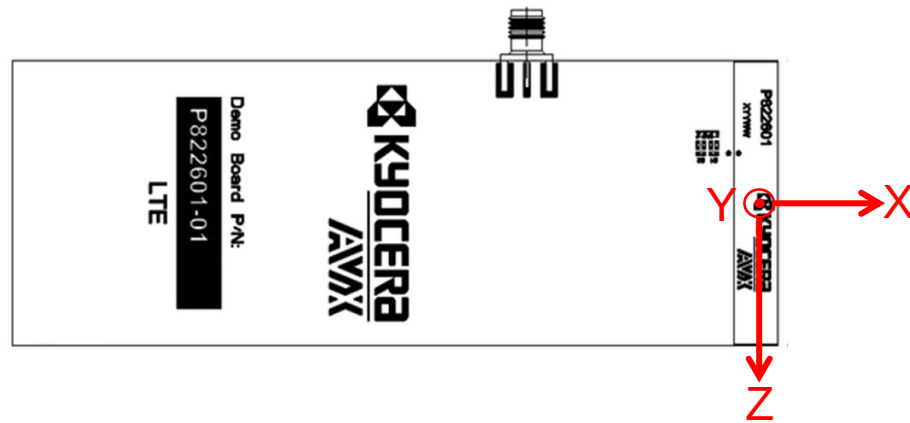

Low Band measured at
700, 750, 850, 900 MHz

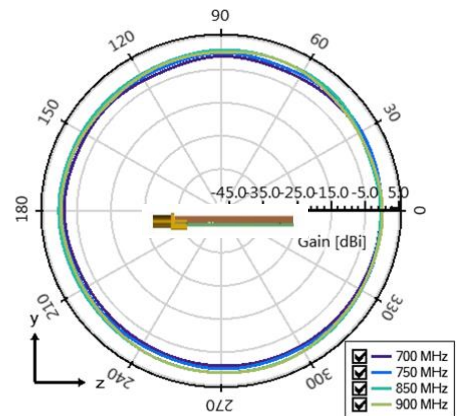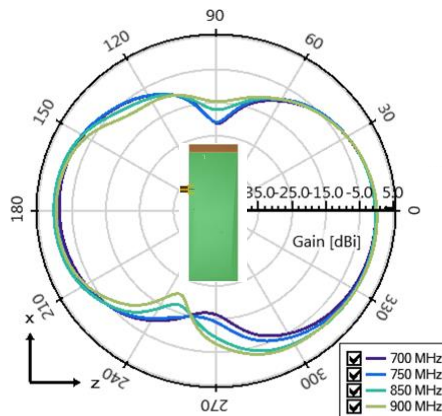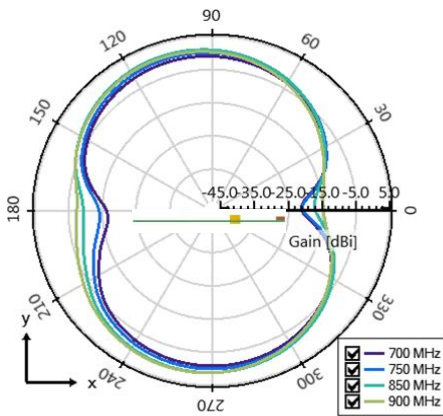


High Band measured at
1800, 1900, 2100 MHz

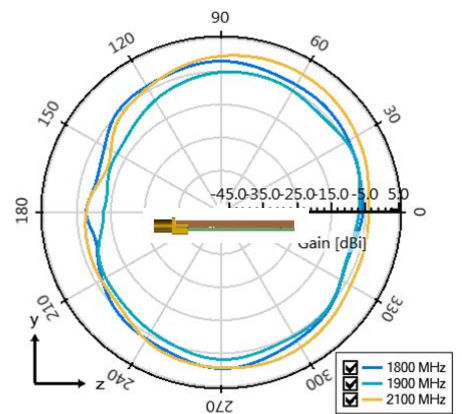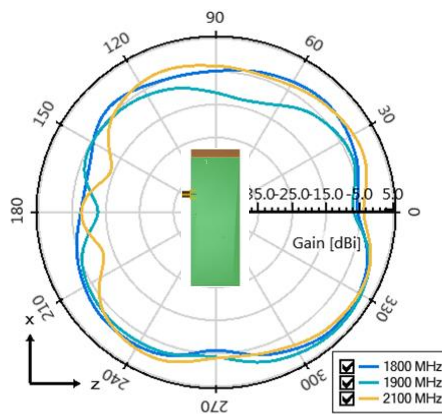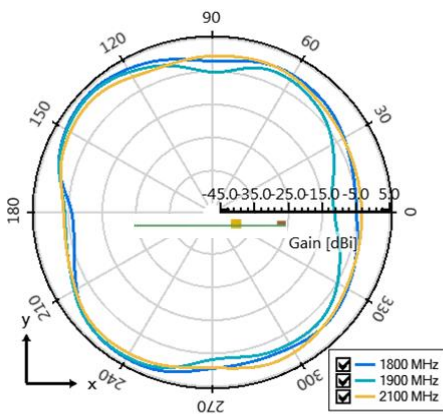




P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns – Band 40, Band 7




Typical P822601/P822602 performance 140 x 50 mm PCB

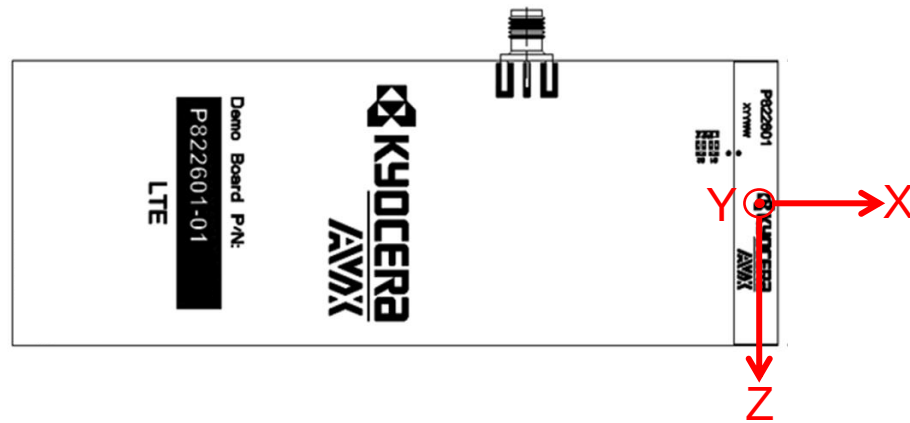

Band 40 measured at
2350 MHz

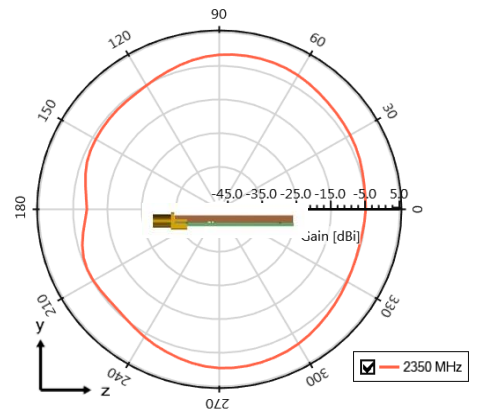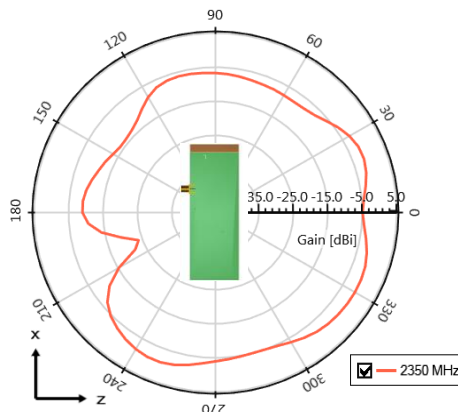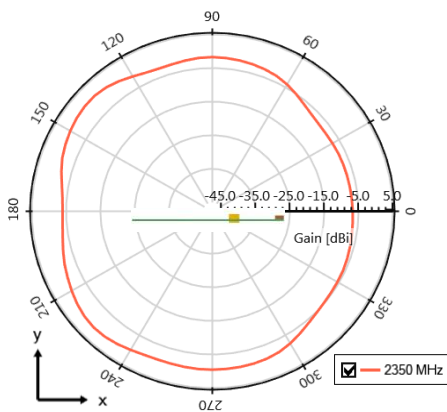



Band 7 measured at
2600 MHz

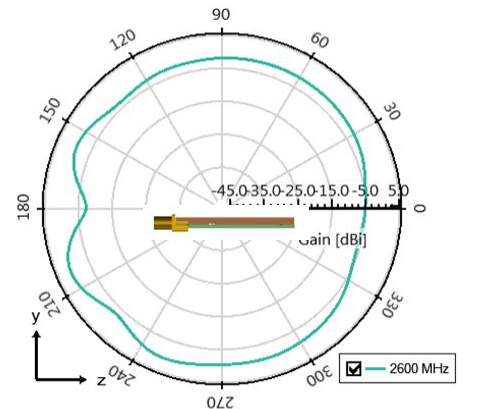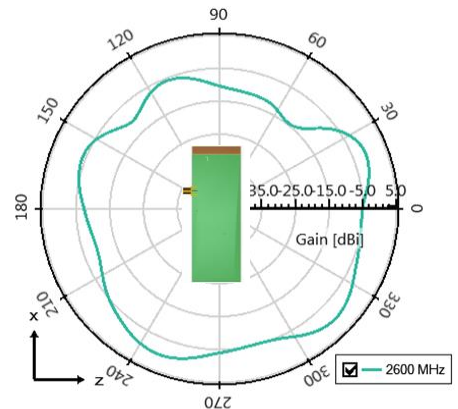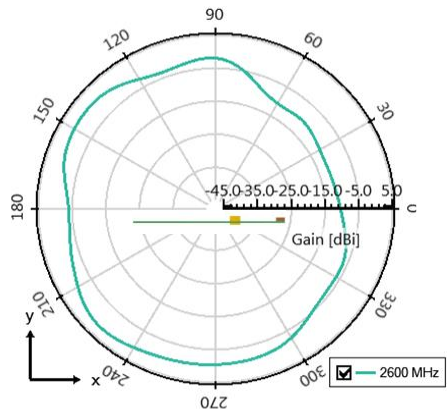

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns – n78


Typical P822601/P822602 performance 140 x 50 mm PCB

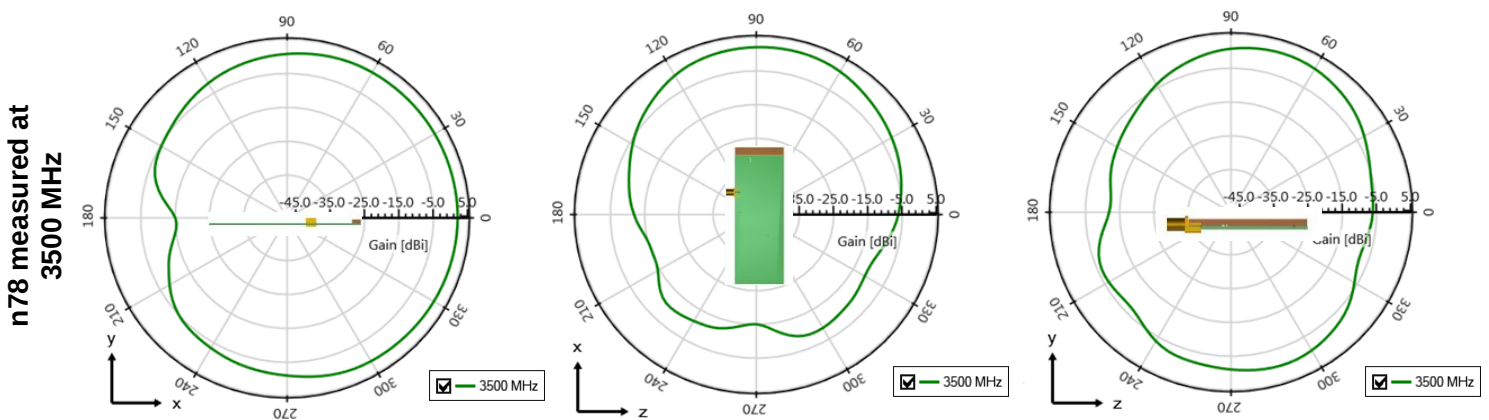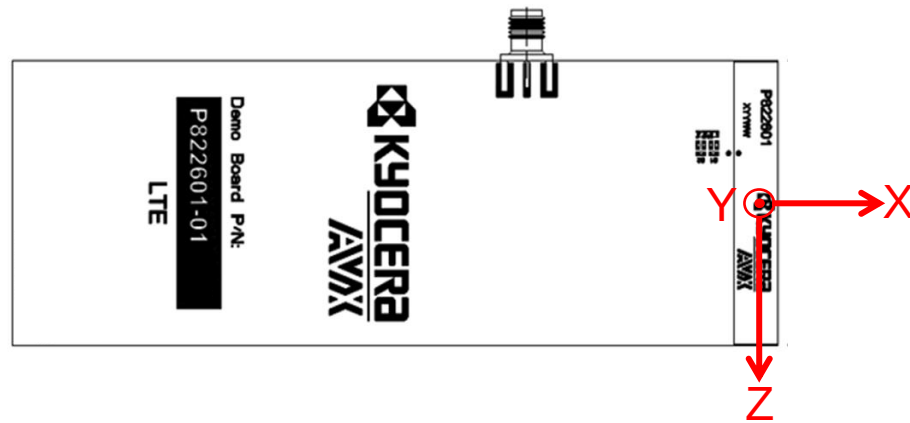

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout (P822601)

Typical layout dimensions (mm)

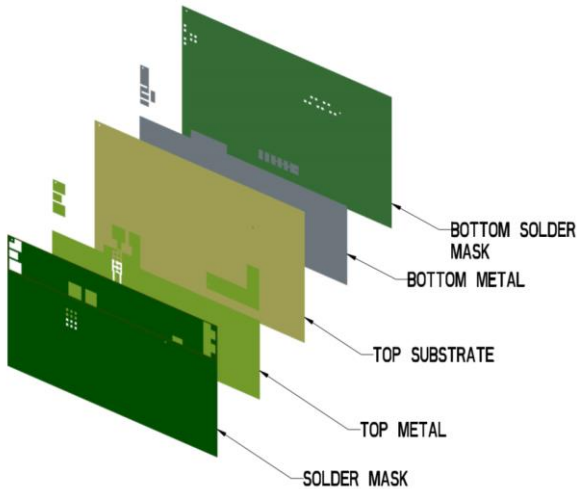


- Additional VIAS: Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

*P822602 uses the same layout but mirrored.


Default Pi Matching Network values with instructions can be found under Antenna Matching Network.

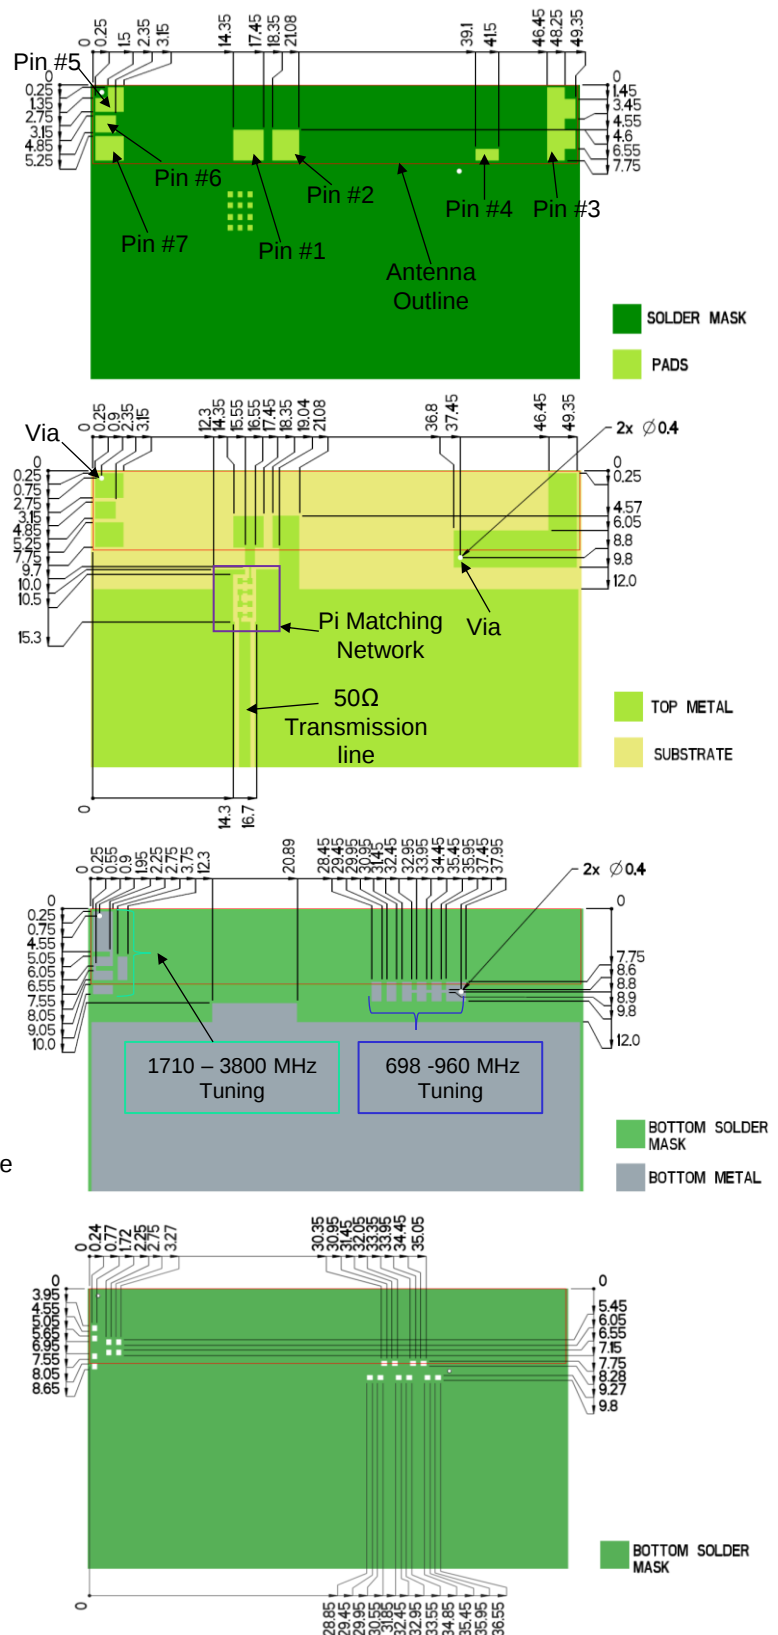

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout (P822602)

Typical layout dimensions (mm)

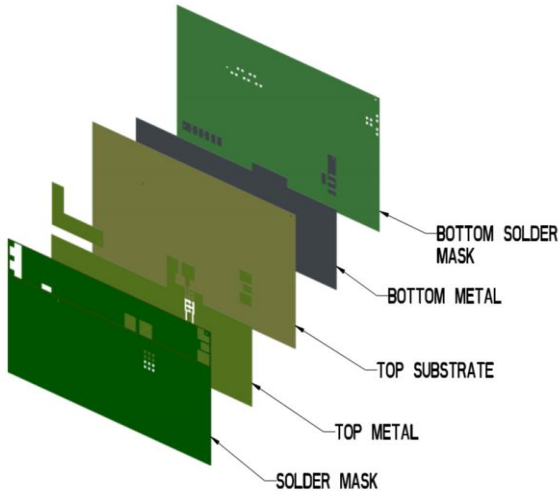


- Additional VIAS : Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

*P822601 uses the same layout but mirrored.


Default Pi Matching Network values with instructions can be found under Antenna Matching Structure.

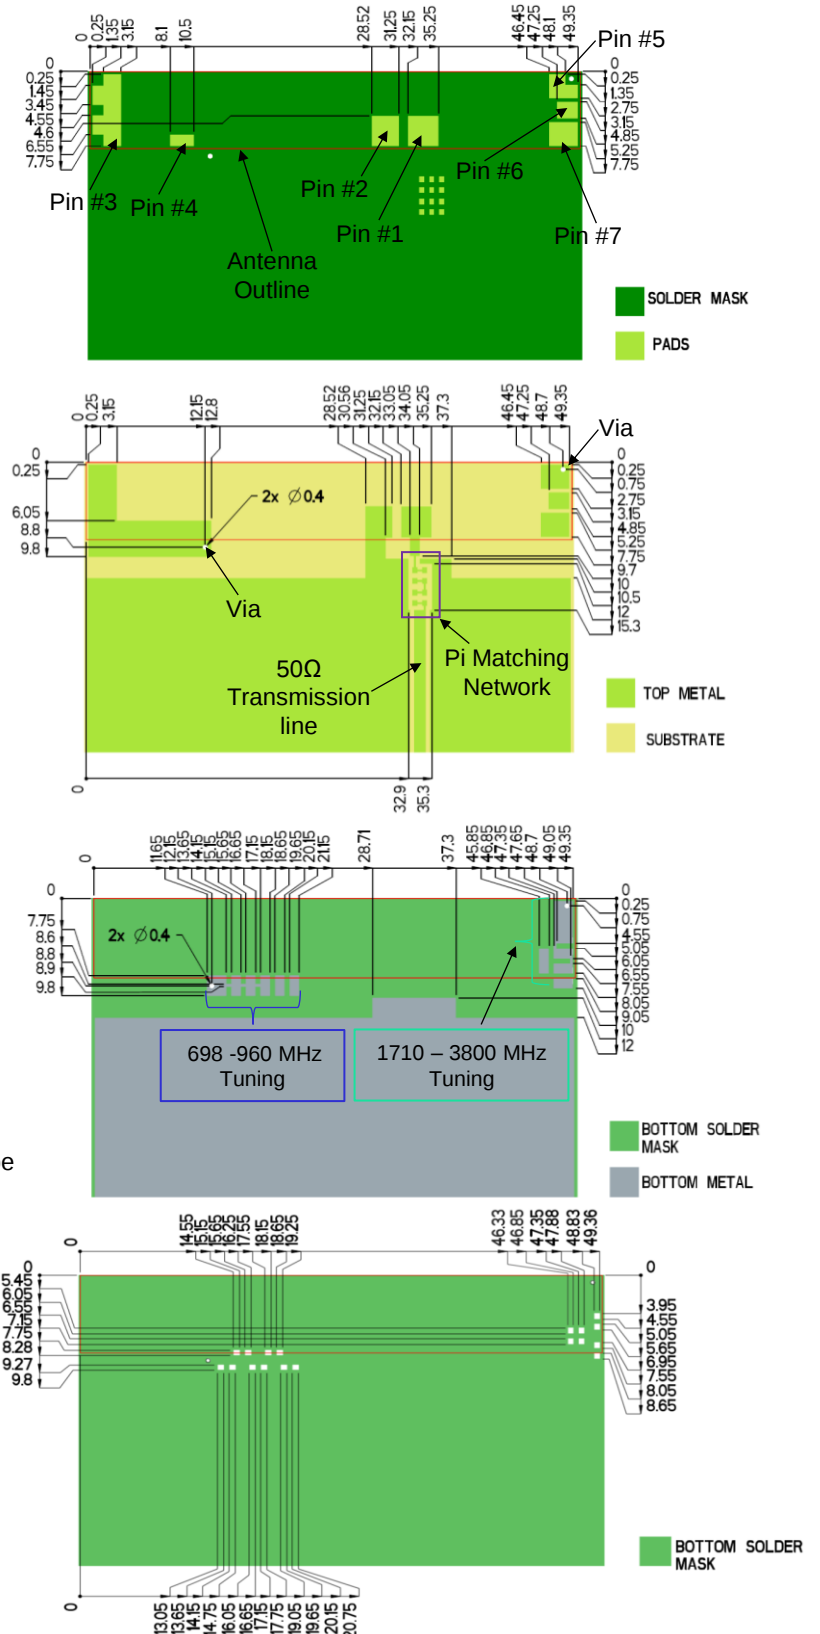


P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Matching Structure (P822601)

Typical matching values on 140 x 50 mm PCB

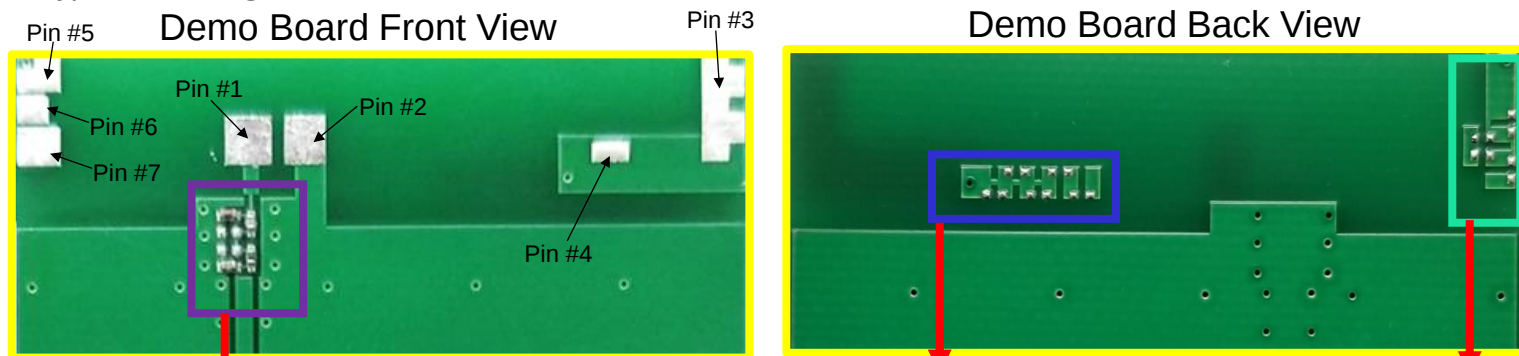

Antenna Matching




(Antenna Matching):
pads are directly inline with
the antenna feed trace.

698-960 MHz Tuning




1710-3800 MHz Tuning

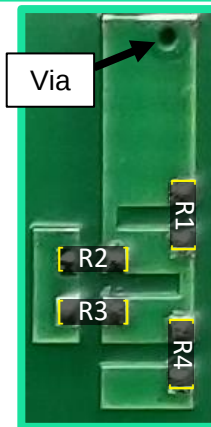

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Low Band Tuning
5	High Band Tuning
6	Dummy Pad
7	Dummy Pad

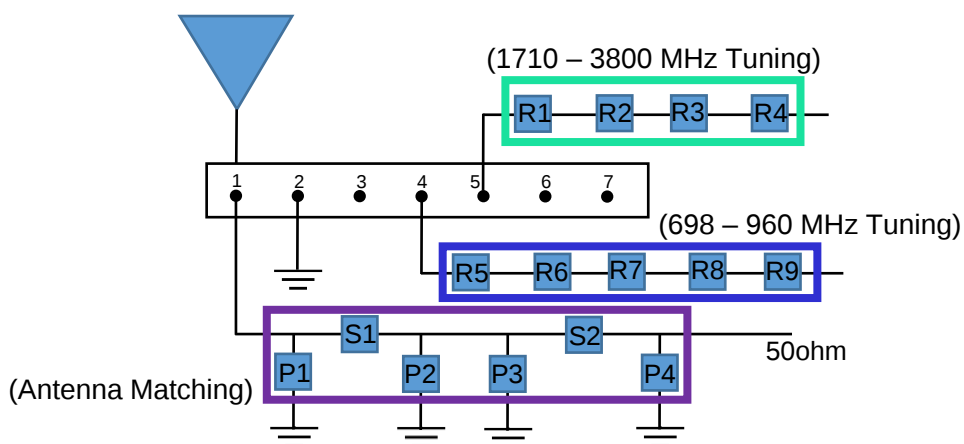


*P822602 uses same matching values

	P1	S1	P2	P3	S2	P4	R1-R4	R5-R9
Default Matching	24nH	2.4pF	DNI	DNI	1.0nH	0.3pF	DNI	DNI
Tolerance	± 20%	± 0.25pF	N/A	N/A	± 0.3nH	± 0.1pF	N/A	N/A

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Matching Structure (P822601)

Typical matching values on 140 x 50 mm PCB

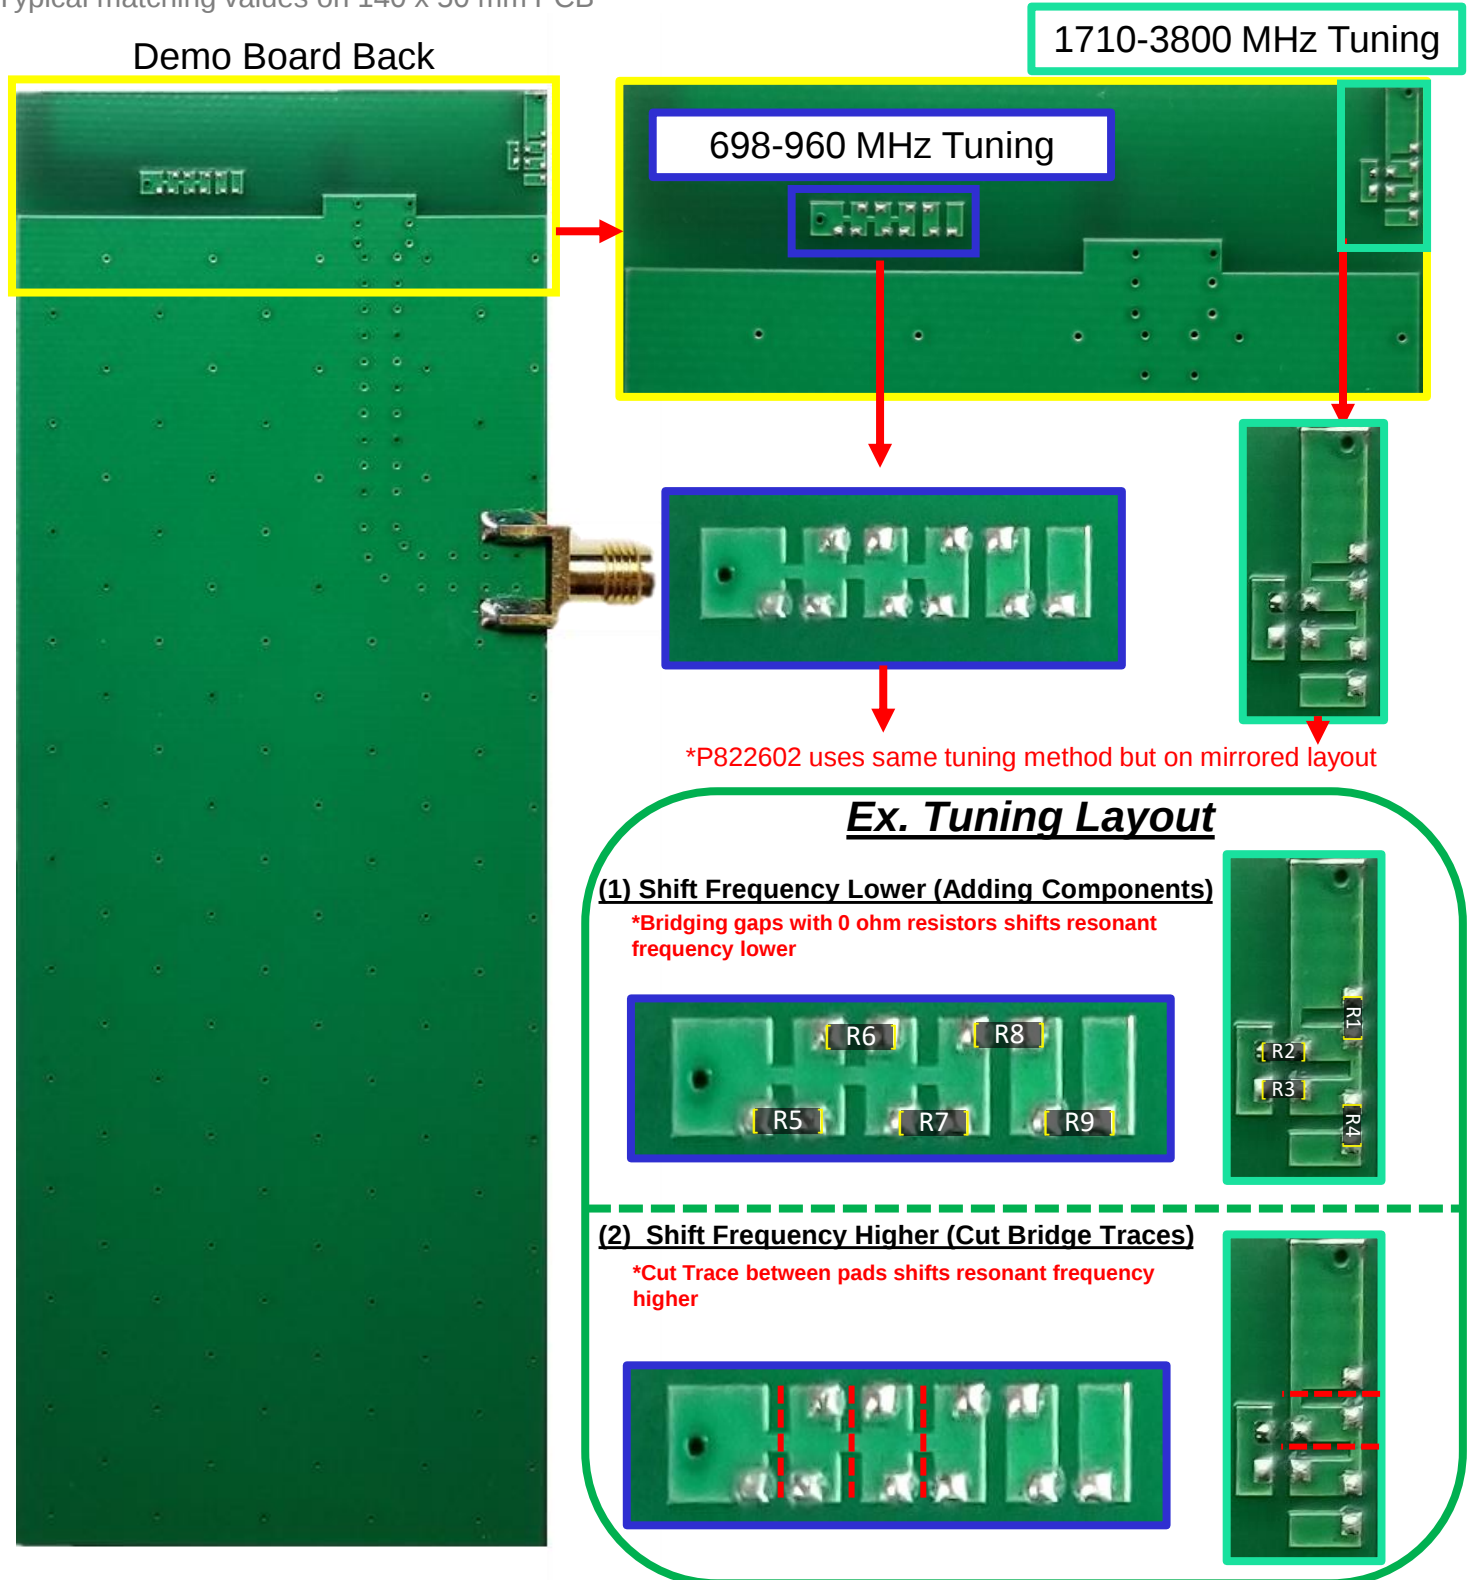

Appendix 1

Appendix 1 gives instructions on how to achieve increased bandwidth to cover Cellular 4G/5G and NTN bands through antenna's matching circuit.

(700 – 960 MHz, Cellular 4G/5G)
(1710 – 2690 MHz, Cellular 4G/5G)
(1525 – 1660 MHz, NTN L-Band)
(1980 – 2200 MHz, NTN S-Band)

Electrical Specifications



Typical Characteristics, using 140 x 50 mm ground plane.

Frequency (MHz)	700 – 960	1710 - 2690	1525 - 1660	1980 - 2200
Peak Gain	2.5 dBi	3.4 dBi	2.2 dBi	2.2 dBi
Average Efficiency	-1.8 dB	-3 dB	-2.5 dB	-2.4 dB
VSWR Match	<3:1	<3:1	<3:1	<3:1
Feed Point Impedance	50 Ω unbalanced			
Polarization	Linear			
Power Handling	2 W			
Radiation Pattern	Omni-directional			

P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Matching Structure (P822601)

Typical matching values on 140 x 50 mm PCB

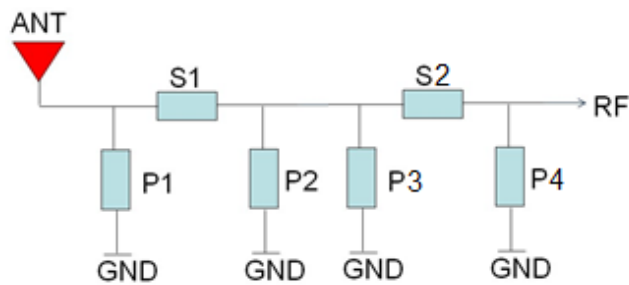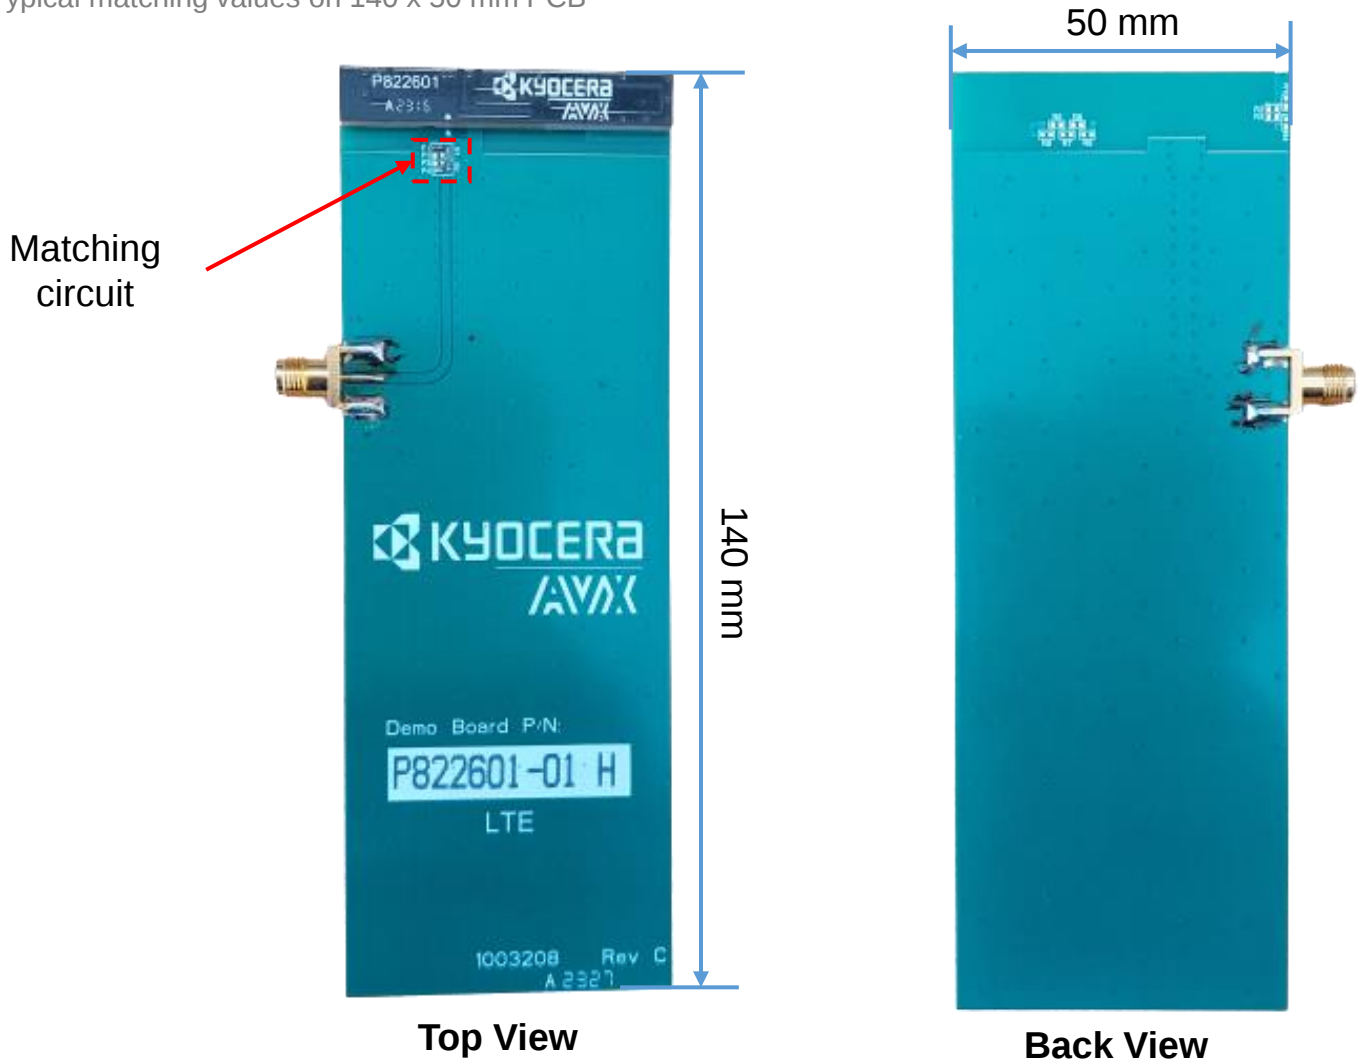


	P1	S1	P2	P3	S2	P4	R1-R4	R5-R9
Default Matching	24nH	2.4pF	DNI	DNI	4.7nH	DNI	DNI	DNI
Tolerance	± 2%	± 0.1pF	N/A	N/A	± 0.1nH	N/A	N/A	N/A

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR and Efficiency Plots

Typical P822601/P822602 performance 140 x 50 mm PCB


Return Loss (500 – 2700 MHz)

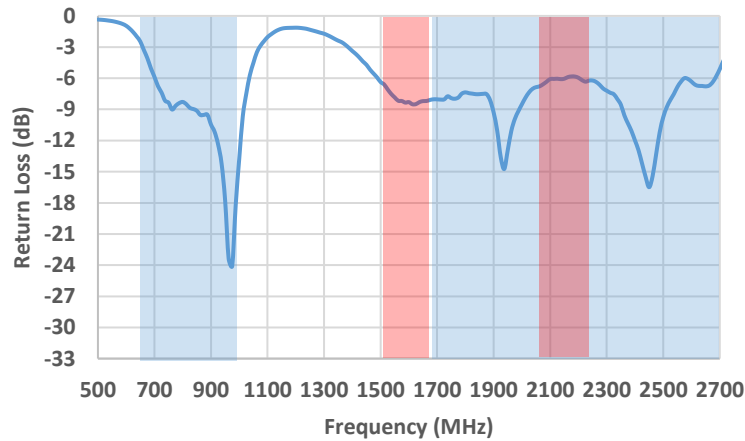


Efficiency Low Band (700 – 960 MHz)

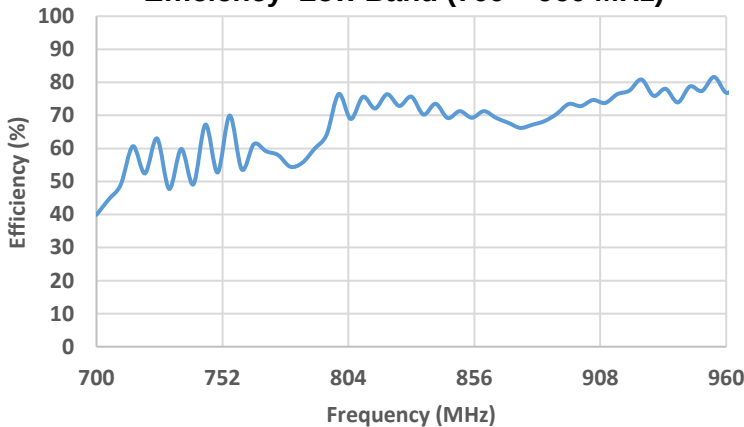


Efficiency High Band (1710 – 2690 MHz)

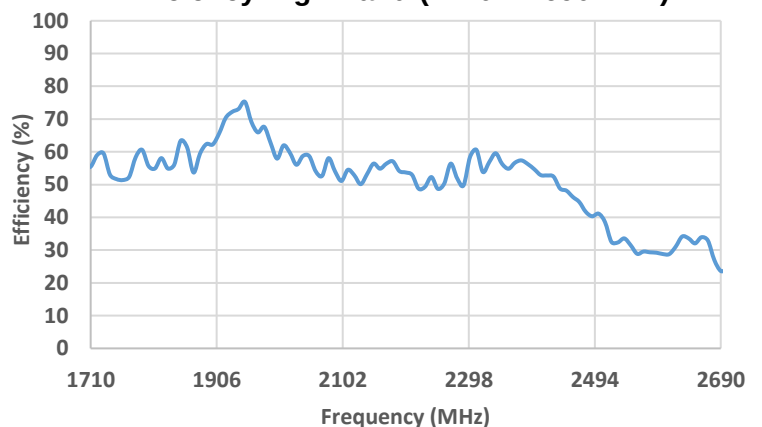

Efficiency L-Band (1525 – 1660 MHz)

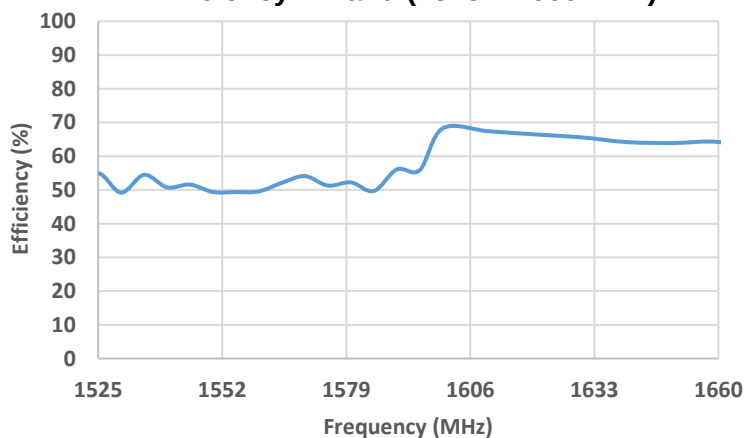

Efficiency S-Band (1980 – 2200 MHz)

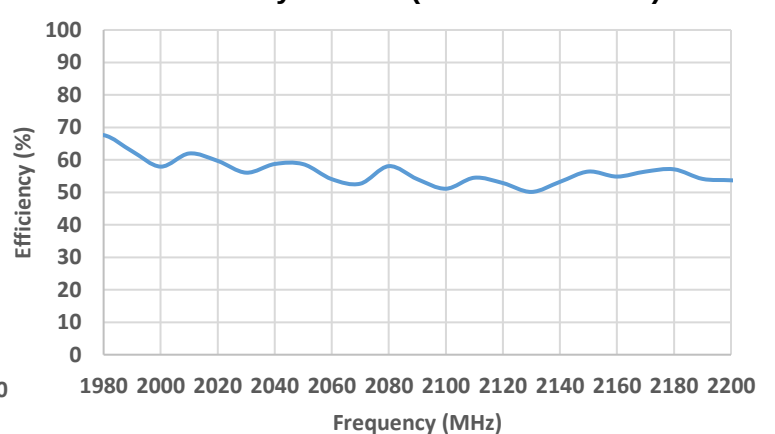


P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Peak Gain Data

Typical P822601/P822602 performance 140 x 50 mm PCB


Peak Gain Low Band (700 – 960 MHz)

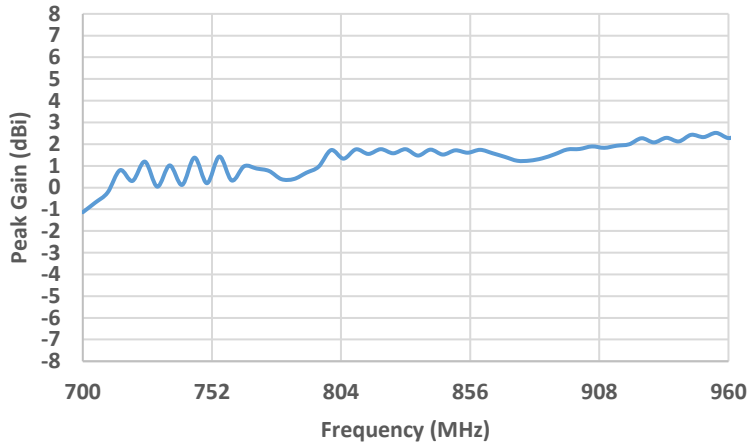


Peak Gain High Band (1710 – 2690 MHz)

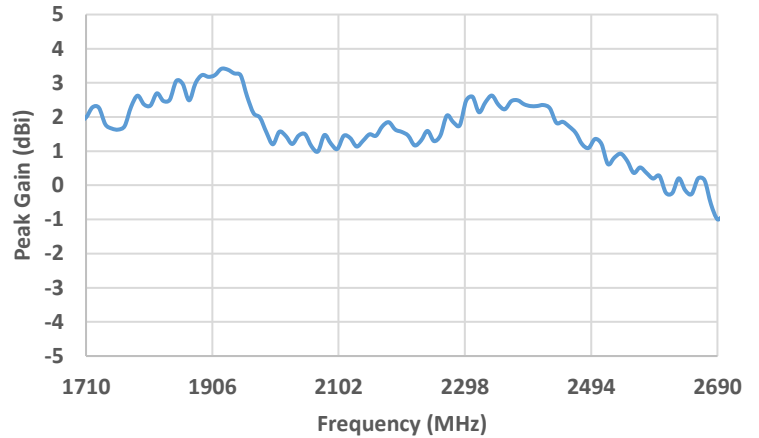

Peak Gain L-Band (1525 – 1660 MHz)

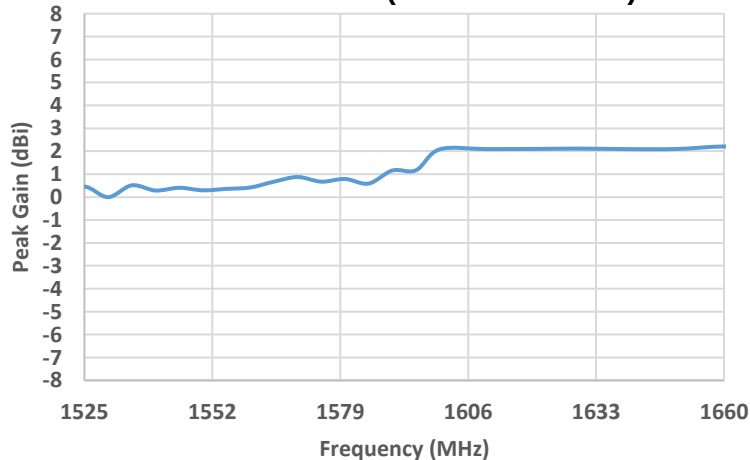





Peak Gain S-Band (1980 – 2200 MHz)

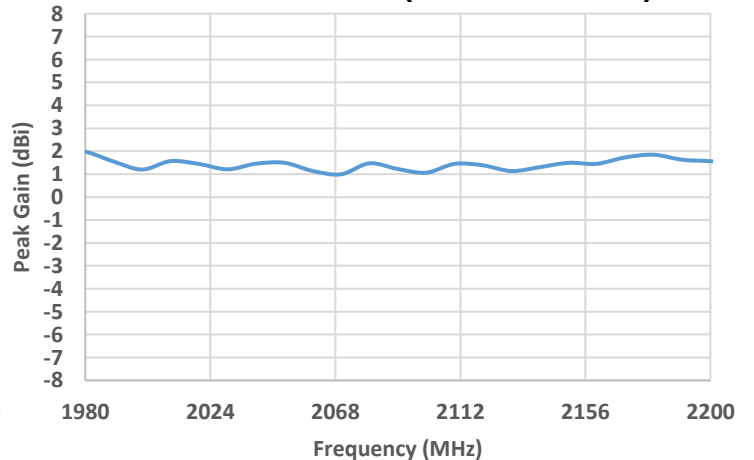

P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns (700 MHz – 960 MHz)





Typical P822601/P822602 performance 140 x 50 mm PCB

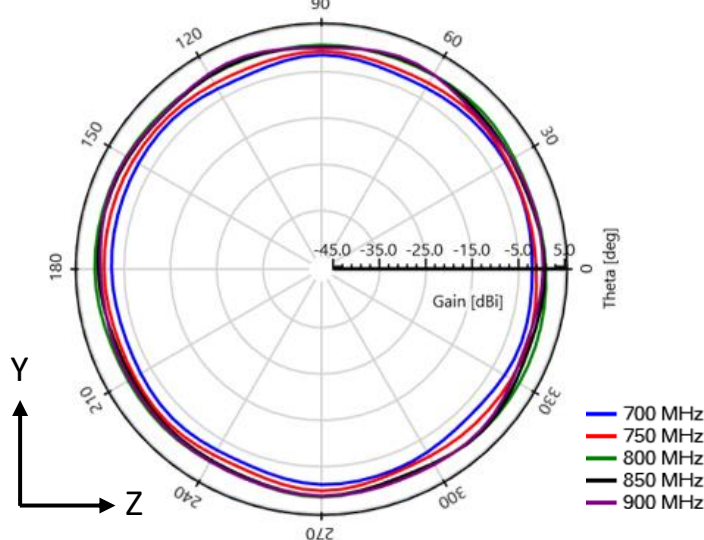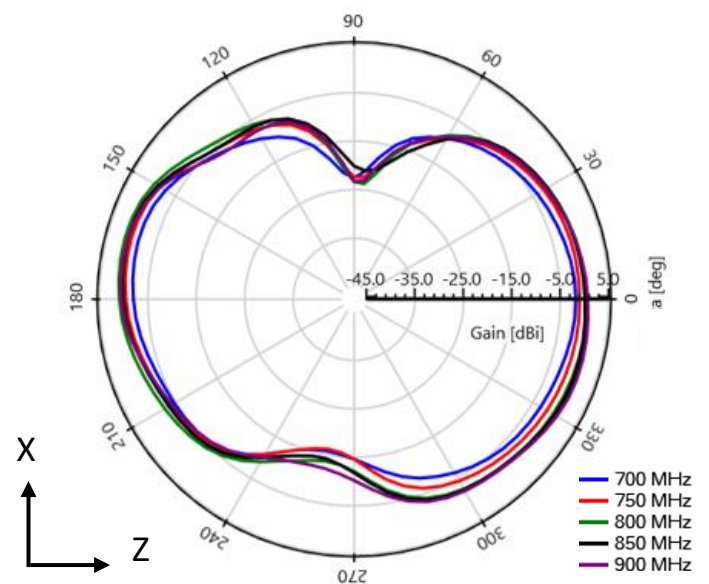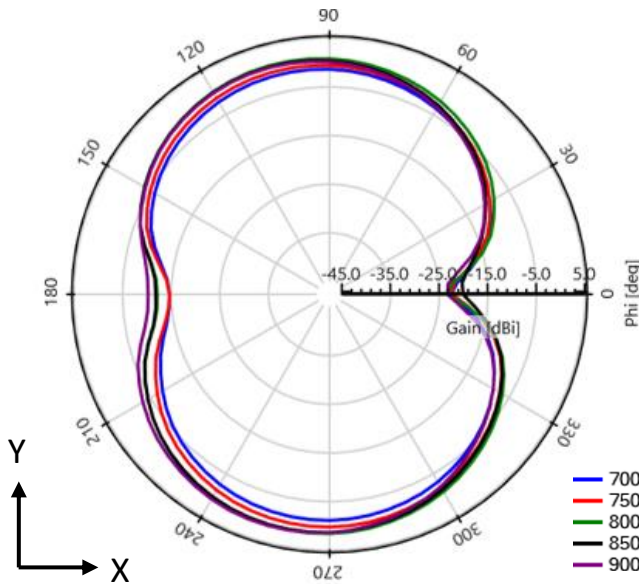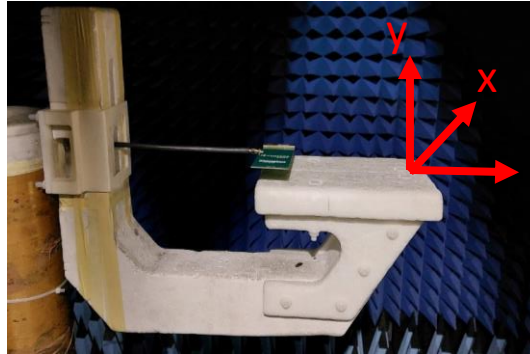

P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns (1710 MHz – 2690 MHz)





Typical P822601/P822602 performance 140 x 50 mm PCB

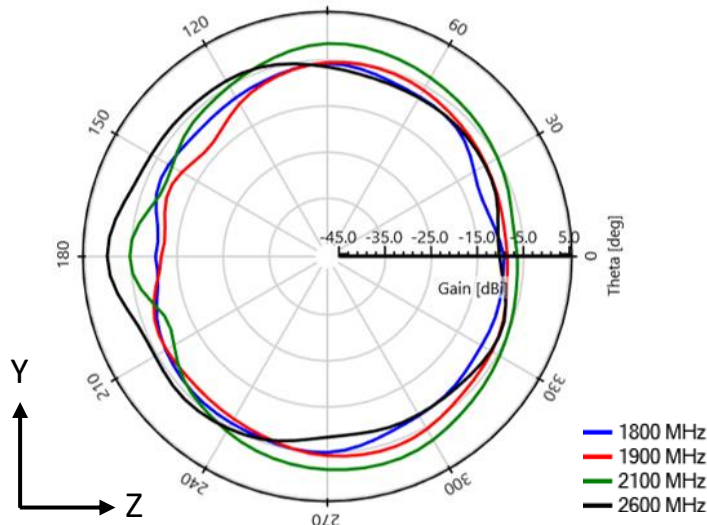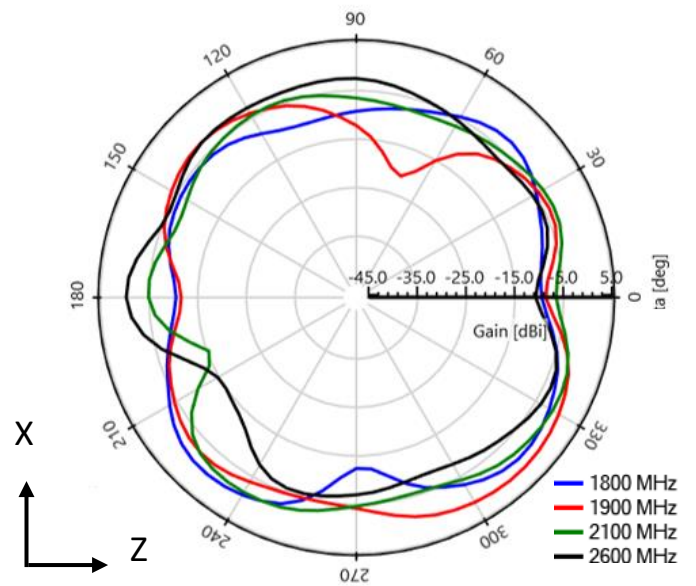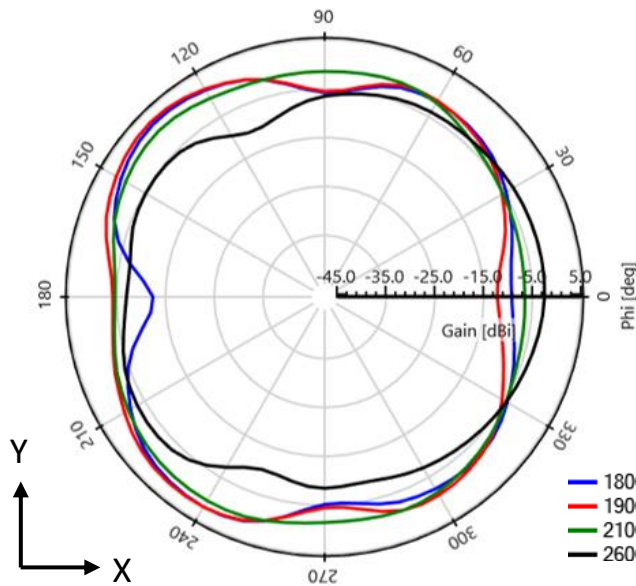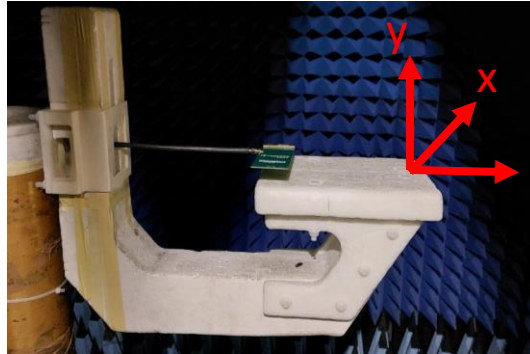

P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns (1525 MHz – 1660 MHz)





Typical P822601/P822602 performance 140 x 50 mm PCB

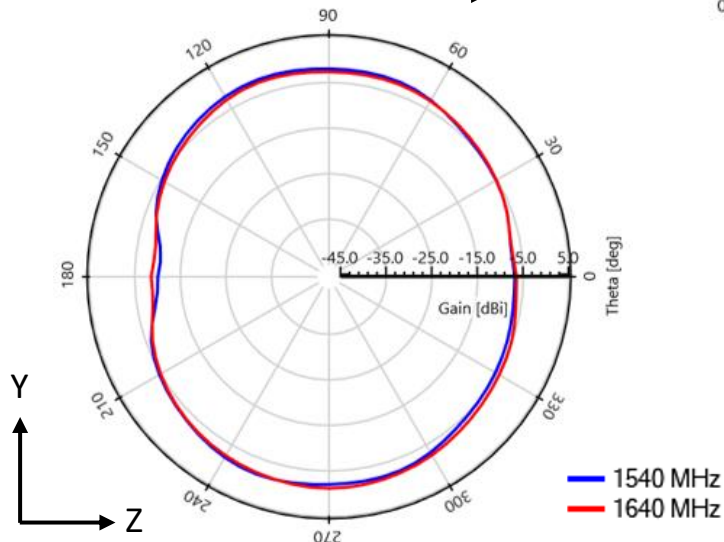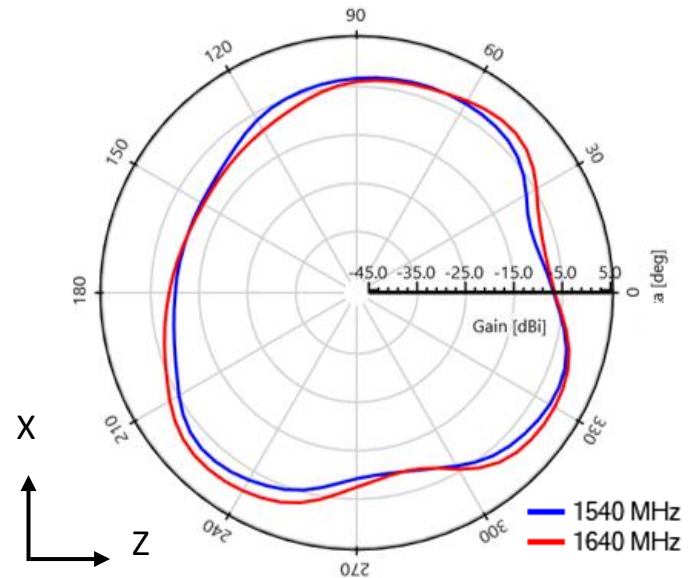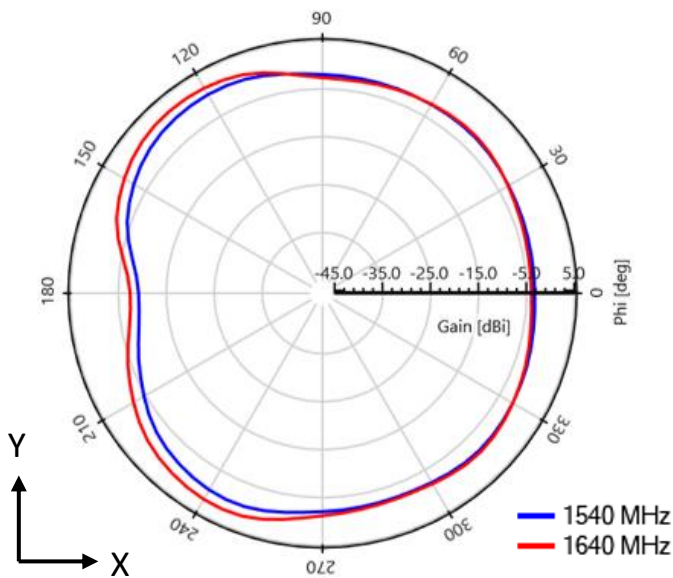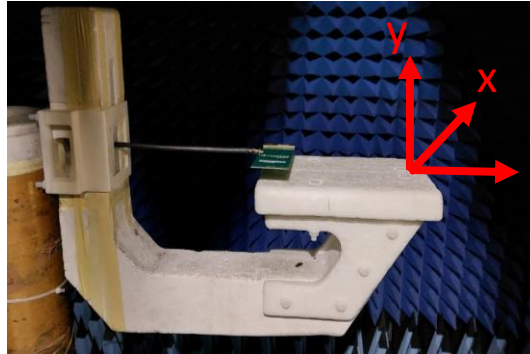

P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns (1980 MHz – 2200 MHz)


Typical P822601/P822602 performance 140 x 50 mm PCB

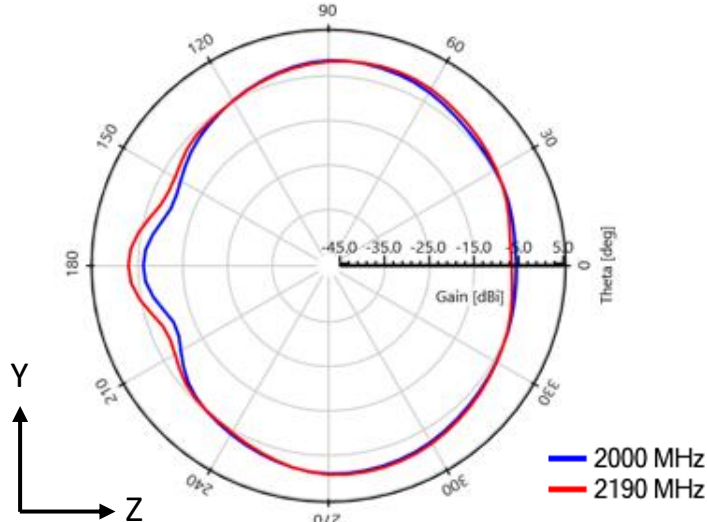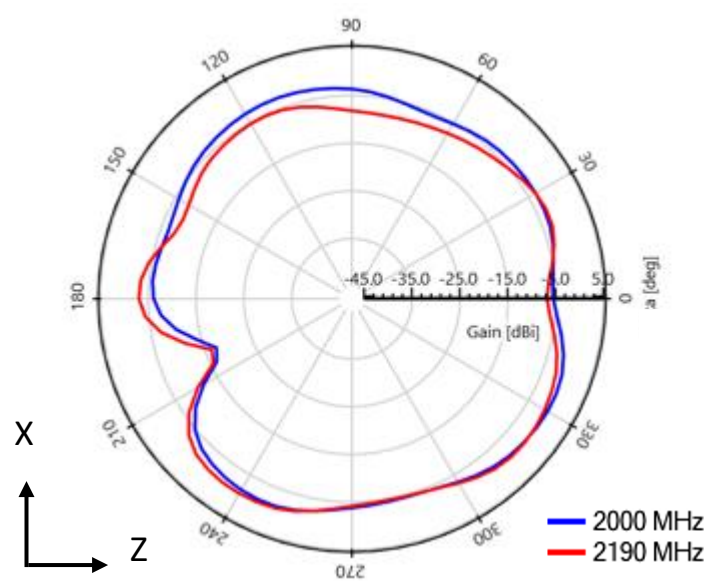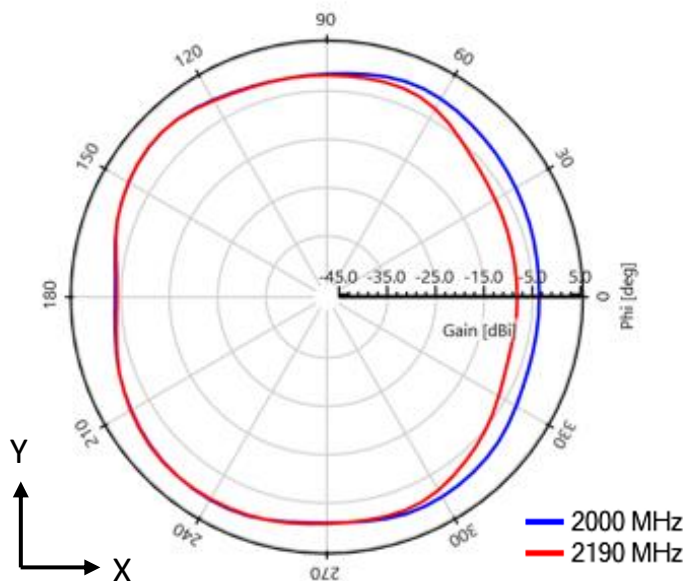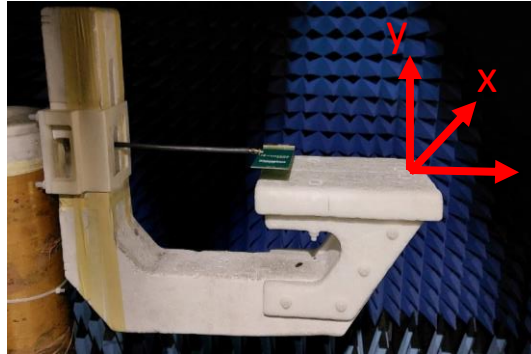

P822601 / P822602 Universal Broadband Embedded 5G NTN/LTE/LPWA Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Demo Board (P822601-01)


Demo Board Front/Back View

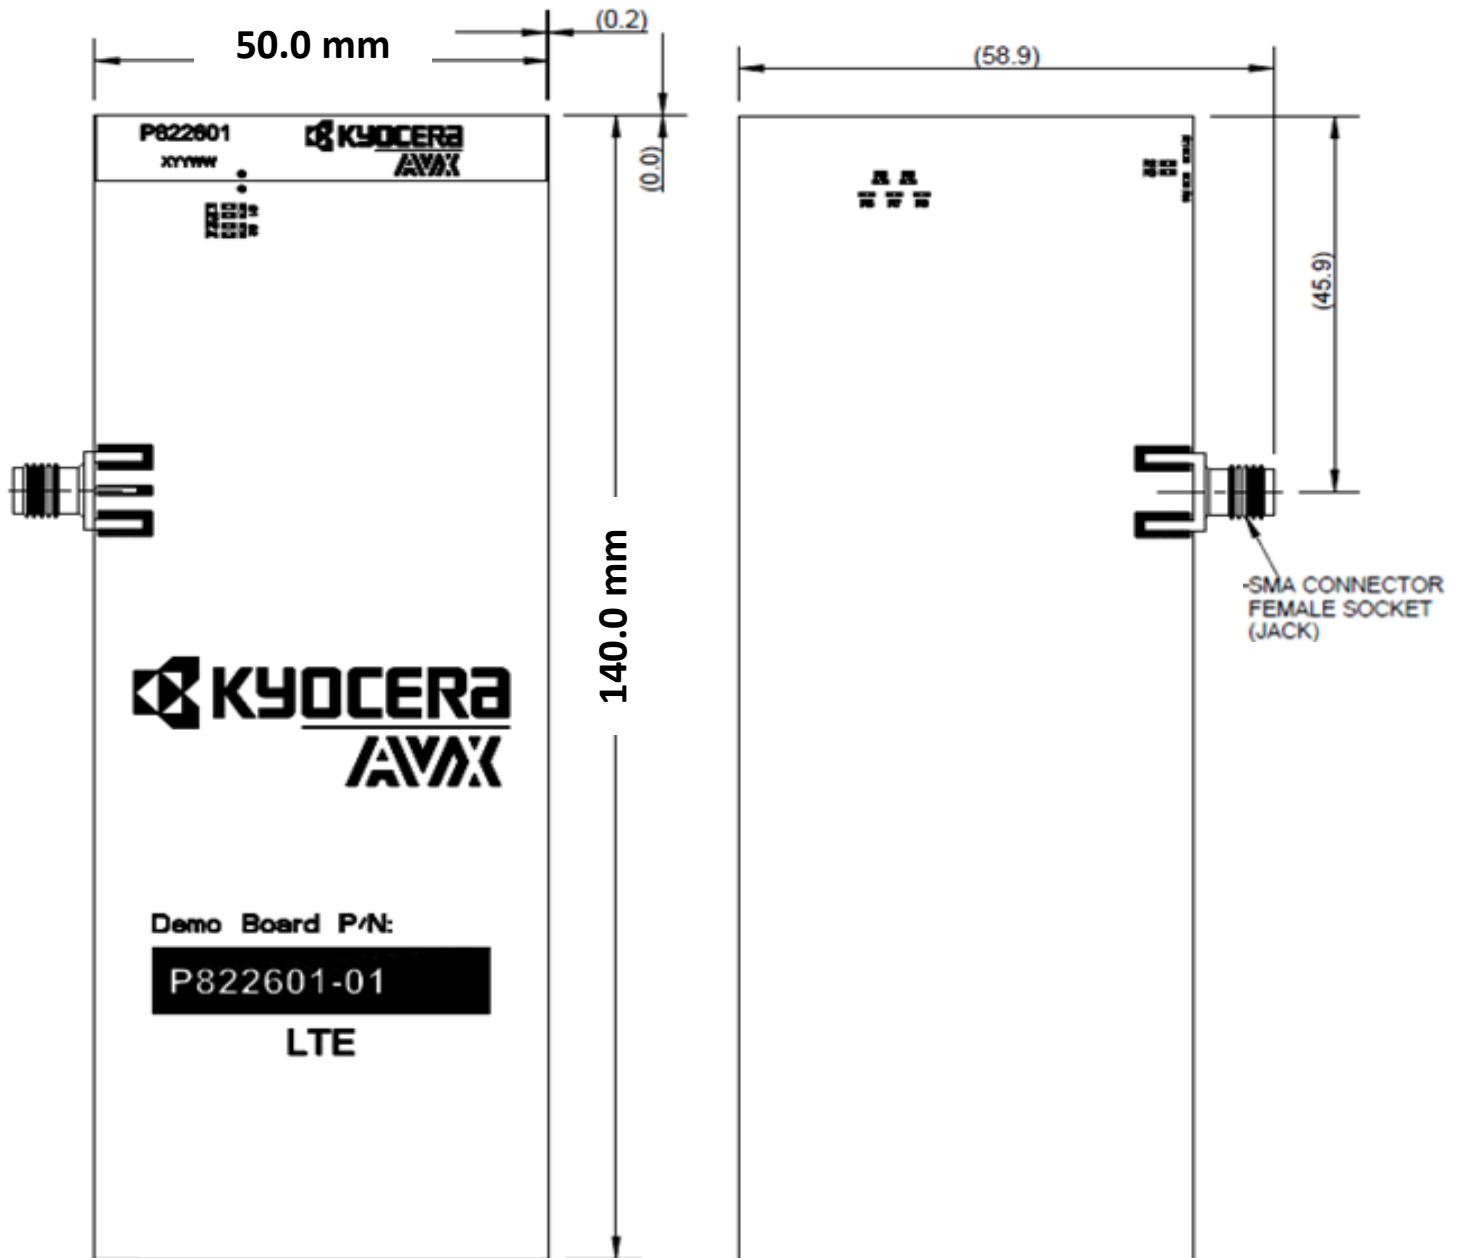

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Recommended Reflow Soldering Profile

The recommended method for soldering the antenna to the board is forced convection reflow soldering. The following suggestions provide information on how to optimize the reflow process for the FR4 antenna:

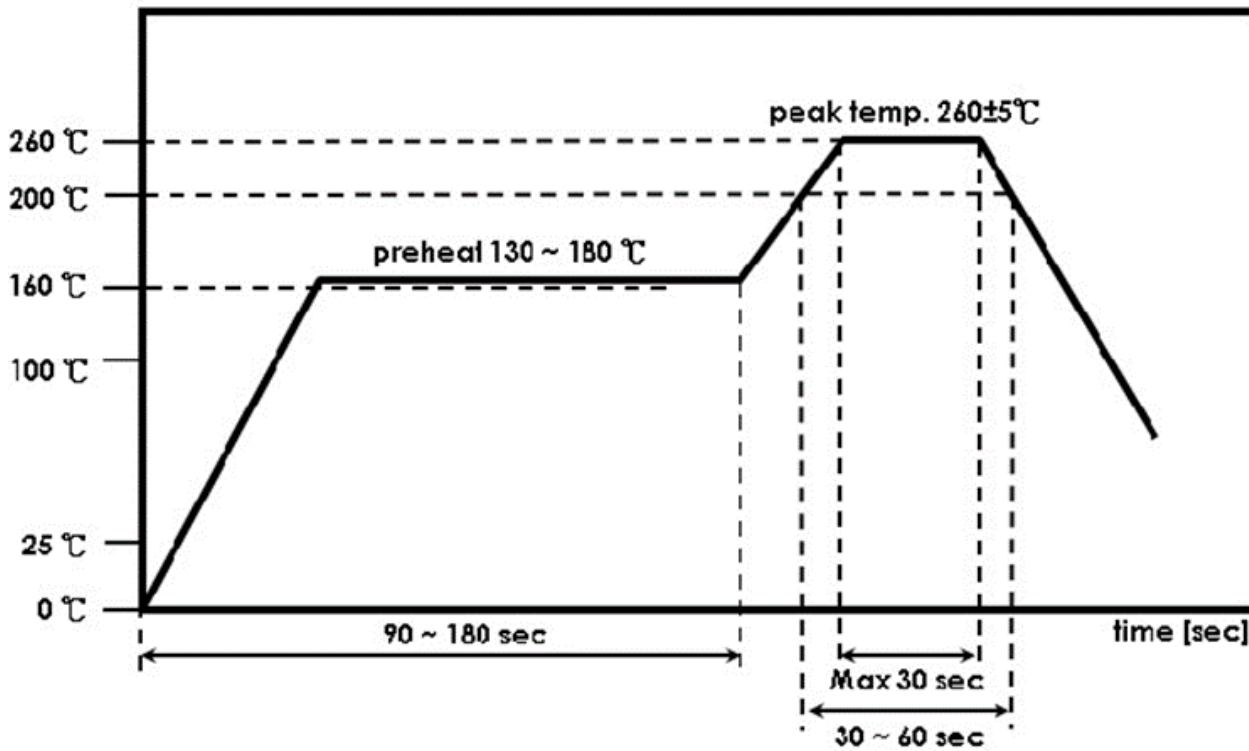

*Adjust the reflow duration to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260° C.

P822601 / P822602 Universal Broadband Embedded LTE/LPWA Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Additional Resources – P822601

Application Note:

https://www.kyocera-avx.com/docs/techinfo/ApplicationNotes/Antenna-AppNotes/AVX-E_AppNote-P822601-P822602.pdf

3D FIT File:

https://www.kyocera-avx.com/download/antennas/ME-FIT/P822601_ME_fit.zip

DXF File:

https://www.kyocera-avx.com/download/antennas/3D-DXF/P822601_3D-DXF.zip

Gerber File:

https://www.kyocera-avx.com/download/antennas/GERBER/P822601_GERBERS.zip

Simulation Files:

HFSS (23R1) : https://www.kyocera-avx.com/download/antennas/ansys-hfss/23r1/P822601_08232022_23r1.zip

HFSS (19R3-22R2) : https://www.kyocera-avx.com/download/antennas/ansys-hfss/19r3/P822601_08232022_19r3.zip

CST : https://www.kyocera-avx.com/download/antennas/CST/P822601_CST2023_09282023.zip

Additional Resources – P822602

Application Note:

https://www.kyocera-avx.com/docs/techinfo/ApplicationNotes/Antenna-AppNotes/AVX-E_AppNote-P822601-P822602.pdf

3D FIT File:

https://www.kyocera-avx.com/download/antennas/ME-FIT/P822602_ME_fit.zip

DXF File:

https://www.kyocera-avx.com/download/antennas/3D-DXF/P822602_3D-DXF.zip

Gerber File:

https://www.kyocera-avx.com/download/antennas/GERBER/P822602_GERBERS.zip

Simulation Files:

HFSS (23R1) : https://www.kyocera-avx.com/download/antennas/ansys-hfss/23r1/P822602_08232022_23r1.zip

HFSS (19R3-22R2) : https://www.kyocera-avx.com/download/antennas/ansys-hfss/19r3/P822602_08232022_19r3.zip

Reference Designs



Nordic Semiconductor nRF9160 DK in a 155.0 x 63.0 mm² PCB:

<https://datasheets.kyocera-avx.com/nordic-nRF9160dk.pdf>



u-blox Blueprint board B36 in a 50 x 72.5 mm² PCB:

https://content.u-blox.com/sites/default/files/documents/B36-VehicleTracking-Blueprint_AppNote_UBX-19027798.pdf