

**W-Series**  
**WEW 35/2 V0 GF SW****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

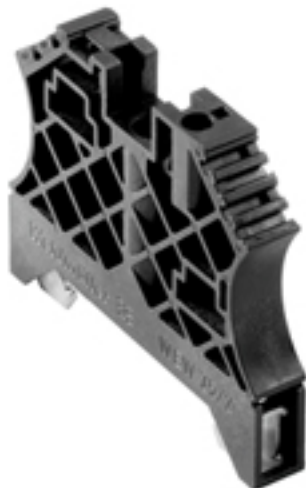
D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

**General ordering data**

|            |                            |
|------------|----------------------------|
| Type       | WEW 35/2 V0 GF SW          |
| Order No.  | <a href="#">1479000000</a> |
| Version    | W-Series, End bracket      |
| GTIN (EAN) | 4050118286779              |
| Qty.       | 100 pc(s).                 |

**W-Series**  
**WEW 35/2 V0 GF SW**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Width      | 8 mm    | Width (inches)  | 0.315 inch |
| Height     | 56 mm   | Height (inches) | 2.205 inch |
| Depth      | 46.5 mm | Depth (inches)  | 1.831 inch |
| Net weight | 14.81 g |                 |            |

**Temperatures**

|                                  |        |                                  |        |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 130 °C |
|----------------------------------|--------|----------------------------------|--------|

**Material data**

|                           |             |        |       |
|---------------------------|-------------|--------|-------|
| Material                  | PA 66 GF 30 | Colour | Black |
| UL 94 flammability rating | V-0         |        |       |

**System specifications**

|         |                   |               |       |
|---------|-------------------|---------------|-------|
| Version | For the terminals | Mounting rail | TS 35 |
|---------|-------------------|---------------|-------|

**Additional technical data**

|                     |                 |                  |                  |
|---------------------|-----------------|------------------|------------------|
| Installation advice | Direct mounting | Interlock        | for screw fixing |
| Type of fixing      | Screwed         | Type of mounting | Screwed          |

**Conductors for clamping (rated connection)**

|                         |      |
|-------------------------|------|
| Tightening torque, min. | 1 Nm |
|-------------------------|------|

**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 6.0   | EC001041    | eClass 6.2 | 27-08-10-03 |
| eClass 7.1 | 27-08-10-03 | eClass 8.1 | 27-14-11-35 |
| eClass 9.0 | 27-14-11-35 | eClass 9.1 | 27-14-11-35 |

**Approvals**

Approvals



ROHS Conform

**Downloads**

 Engineering Data [EPLAN, WSCAD, Zuken E3.S](#)