

SPECIFICATION

Part No.	: OMB.433.B06F21
Description	: 433MHz 6dBi Omni Directional Outdoor Antenna with N Type Female Connector, U-Bolt, 1094mm Length
Features	: Omni-Directional Radiation Pattern Collinear 6dBi Peak gain, 433 MHz Fiberglass Housing Robust design for all weather operation IP65 waterproof Length: 1,094mm Weight: 1,300g N type Female connector Wall mount bracket included RoHS compliant



1. Introduction

The OMB.433.B06F21 is a 6dBi fiberglass omni-directional outdoor antenna, operating in 433 MHz ISM band. The antenna is designed for applications such as metering, industrial/environmental monitoring, remote asset monitoring and mesh network applications.

The OMB.433 operates at 433MHz, one of the most widely used license free ISM bands, with a 6dBi peak gain. The omni-directional antenna radiates uniformly in the azimuth providing coverage over long distances. Coupled with a very low VSWR, this characteristic provides the best performance because the antenna gives maximum coverage range in the horizontal plane over 360 degrees, thus minimizing the amount of nodes needed for a mesh network.

The UV resistant fiberglass housing enables the OMB antenna to be utilized in all kinds of harsh environments, making it more robust and safer than traditional whip antennas. It can be connected directly to the access point or telemetry unit, or can be mounted on wall or device surface via the N-type connector.

A smaller model, OMB.433.B03F21, with 3dBi peak gain, is also available.


2. Specification

ELECTRICAL	
Standard	ISM 433
Band	433 MHz
Antenna Type	Collinear Dipole Array
Peak Gain	6 dBi
Polarization	Vertical
Impedance	50 ohms
Max Input Power	100 watts
VSWR	1.5:1
Radiation	Omni-Directional
Vertical Beamwidth	36 Deg
Horizontal Beamwidth	360 Deg
Internal Material	Copper
Connector	N Type Female
MECHANICAL	
Length	1094 mm(Max)
Bracket Dimension	70 x 35mm(Max)
Antenna Weight	1300g
Mounting Accessories Weight	70g
Application	Indoor/Outdoor
Radome Material	White Fiberglass
Bracket Material	Aluminum
Mount Style	Pole Mount/Wall Mount
Mount Hardware Material	Stainless Steel
Wind Resistance	>150mph (>241km/h)
Waterproof	IP65

ENVIRONMENTAL	
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing


3. Antenna Characteristics

3.1 VSWR

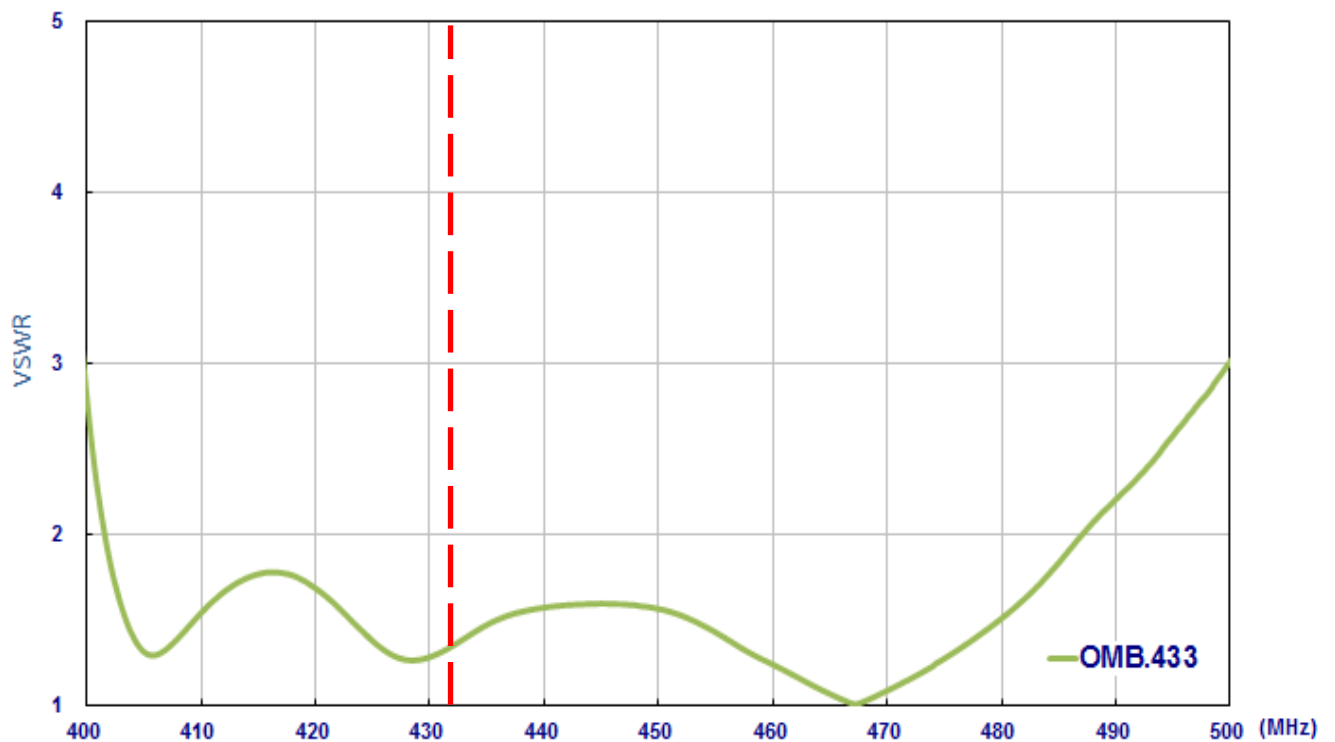


3.2 Peak Gain

E-plane

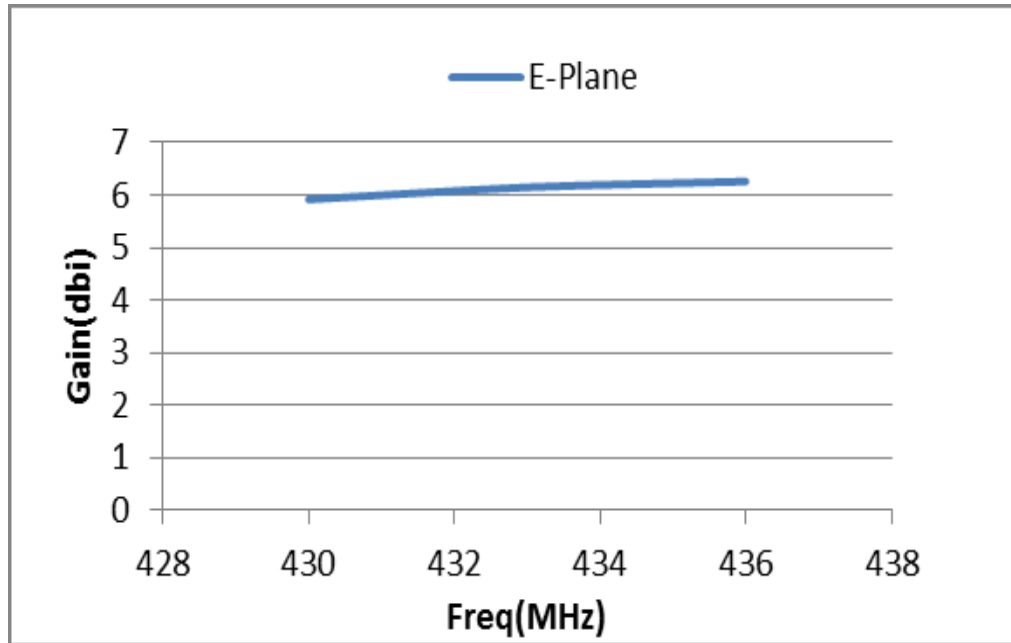


H-plane

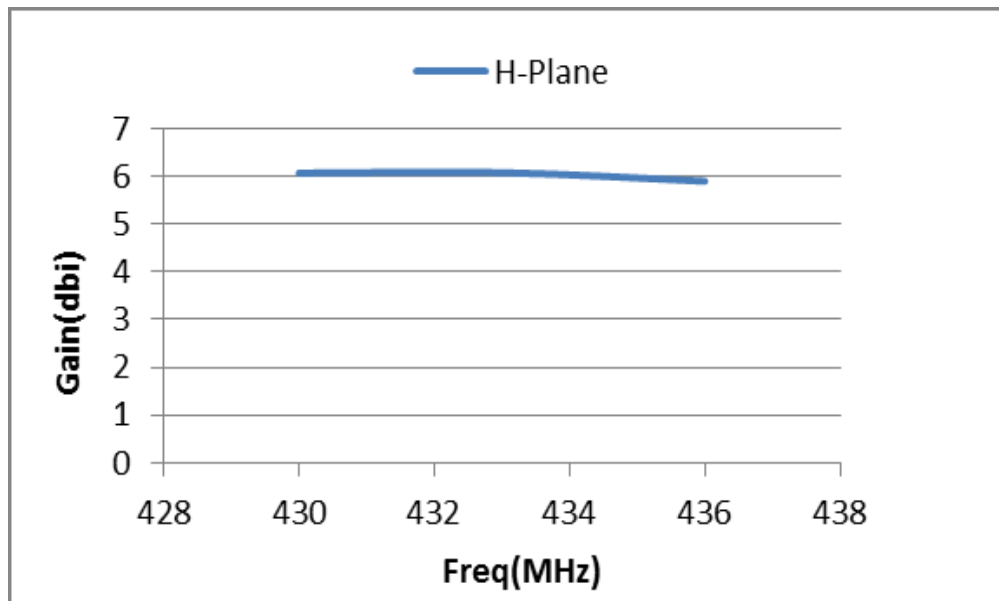


4. Antenna Radiation Pattern

4.1 Measurement Setup

Vertical Pattern – E plane

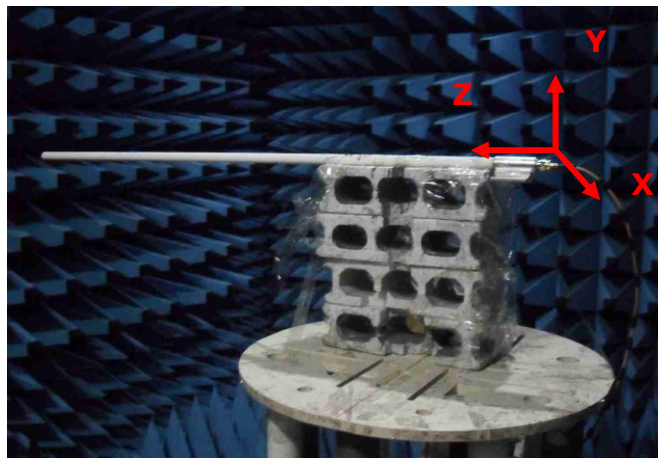


Horizontal Pattern – H plane

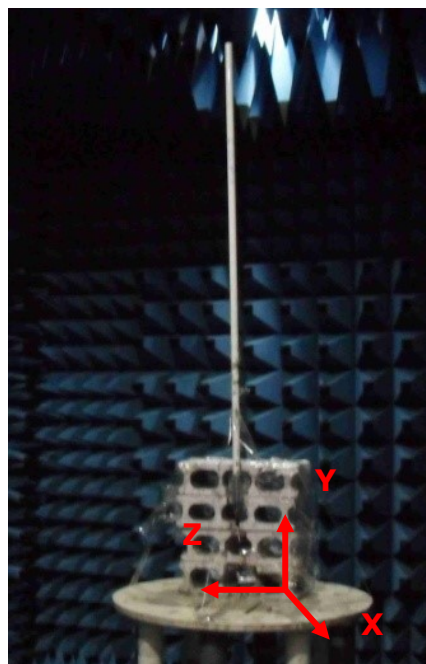


4.2 2D Radiation Pattern



Vertical Pattern – E plane




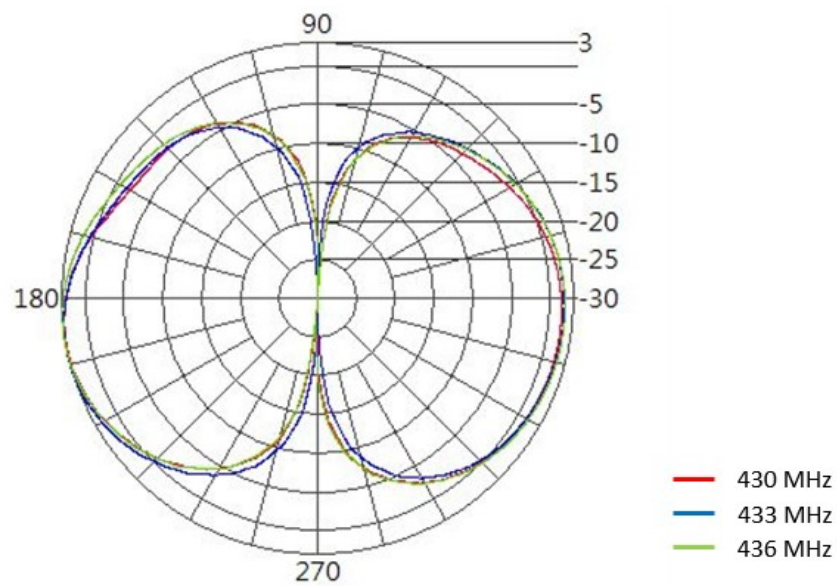


Horizontal Pattern – H plane

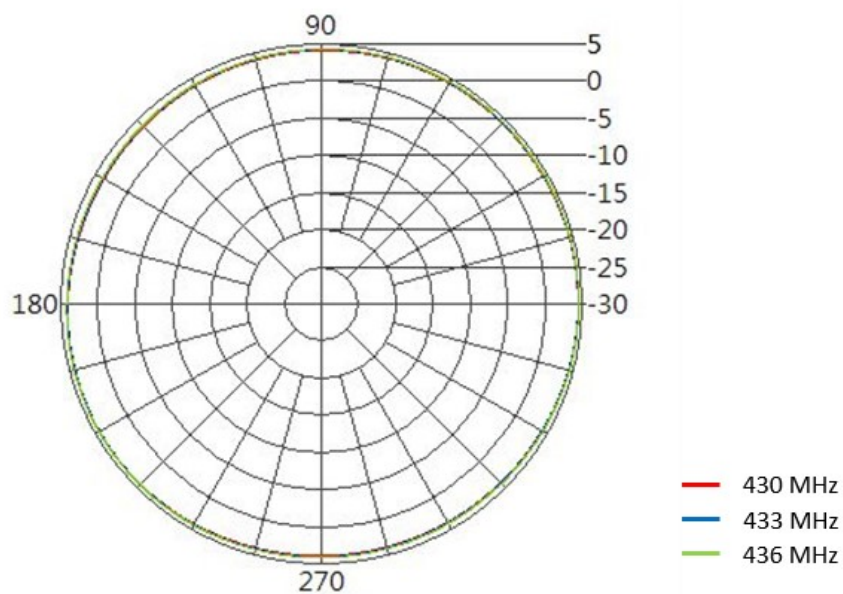

5. Mechanical Drawing (Unit: mm)

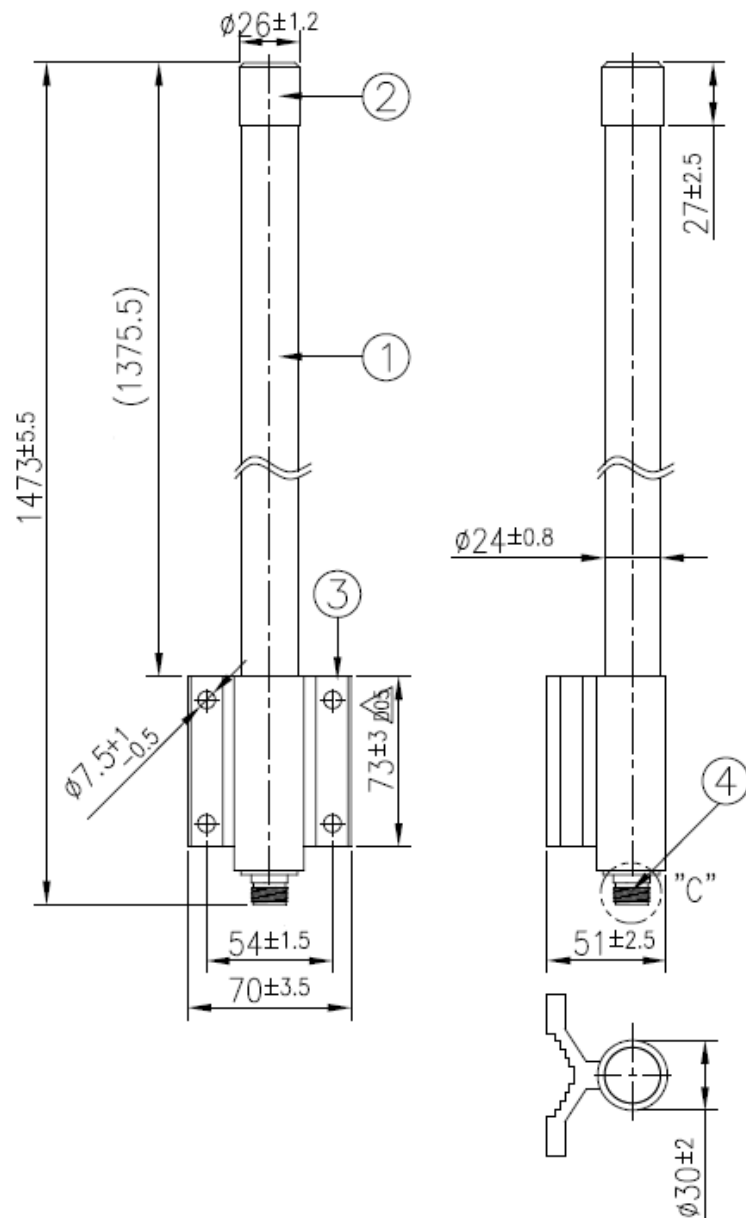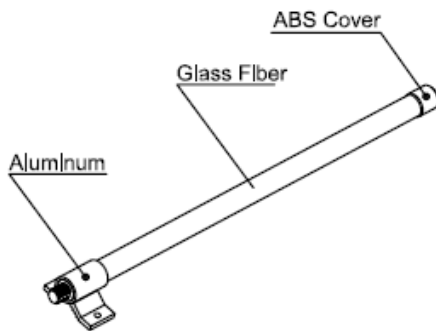

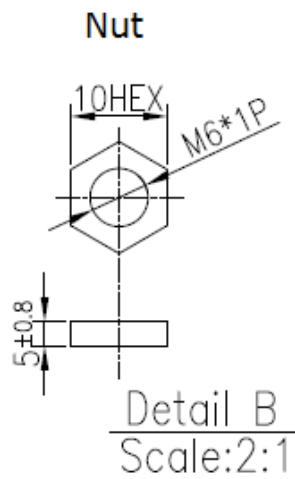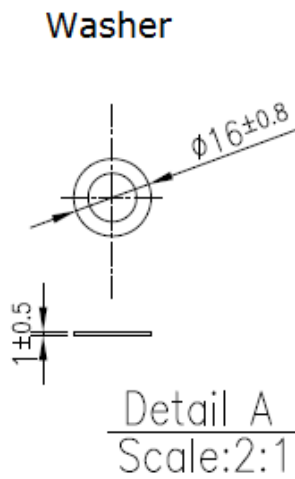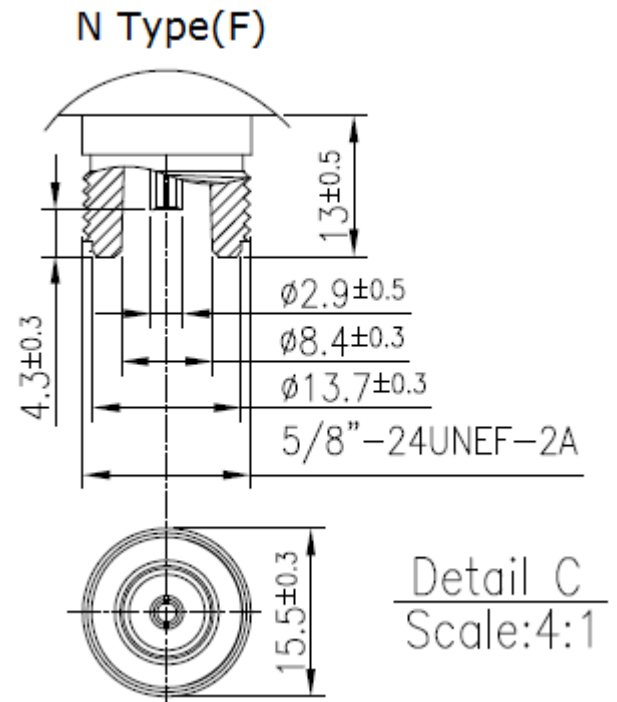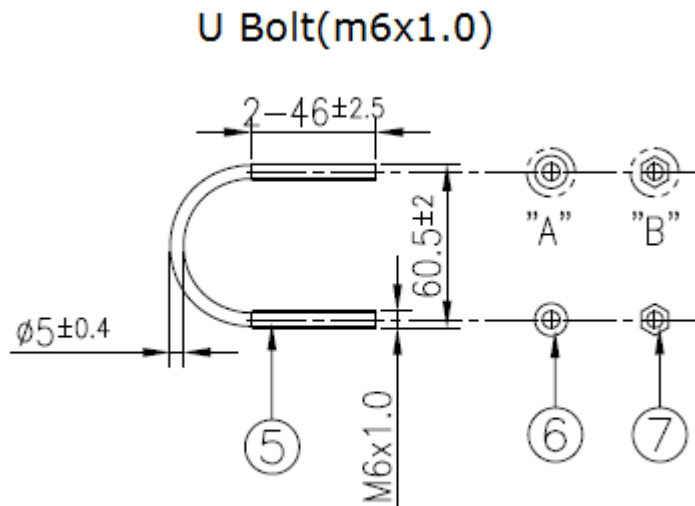


	Name	P/N	Material	Finish	QTY
1	OMB.433 Antenna	001215A000021A	Fiberglass	White	1
2	Cover	000111K000021A	ABS	Sliver	1
3	Bracket	000312B000021A	Aluminum	Silver	1
4	N Type(F)	201211K000021A	Brass	Ni Plated	1
5	M6 U Bolt	000412B000021A	Stainless Steel	Sliver	2
6	M6 Washer	000411K010021A	Stainless Steel	Silver	4
7	M6 Nut	000411K020021A	Stainless Steel	Sliver	4

6. Packaging


OMB.433.B06F21

Packaging Specifications


1 OMB.433.B06F21 per PE Bag
 Bag Dimensions 130mm*1300mm
 1 PE Bag per Tube
 Tube Dimensions - Ø80mm*Height 1150mm
 Total Weight - 1.16Kg

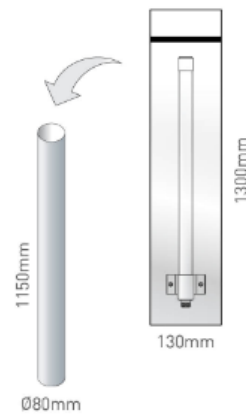

10 tubes per carton
 Carton Dimensions - 1160*410*180mm
 Weight - 13.12Kg

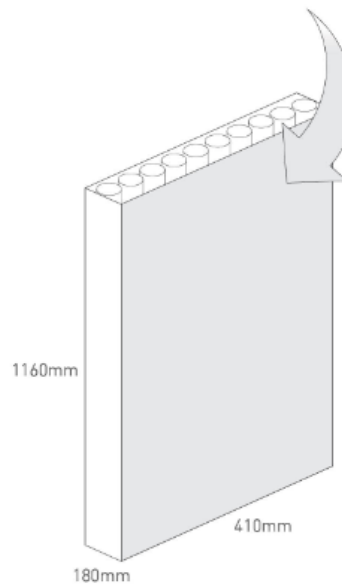

Pallet dimensions 1200*1100*1410mm
 14 Cartons per pallet

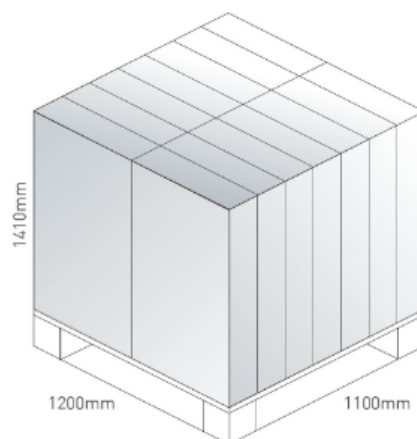

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.