

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



PCB terminal block, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of potentials: 2, number of rows: 1, number of positions per row: 2, product range: PTSM 0,5/..-V-THR, pitch: 2.5 mm, connection method: Push-in spring connection, mounting: THR soldering, conductor/PCB connection direction: 90 °, color: black, Pin layout: Linear pinning, Solder pin [P]: 2.1 mm, number of solder pins per potential: 2, type of packaging: 44 mm wide tape

## Your advantages

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- High current carrying capacity of 6 A in very compact dimensions
- Designed for integration into the SMT soldering process
- Vertical connection enables multi-row arrangement on the PCB

## Commercial Data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 1770953            |
| Packing unit                         | 310 pc             |
| Minimum order quantity               | 310 pc             |
| Sales Key                            | AAK                |
| Product Key                          | AAKCAC             |
| Catalog Page                         | Page 51 (C-1-2013) |
| GTIN                                 | 4046356459532      |
| Weight per Piece (including packing) | 2.4 g              |
| Weight per Piece (excluding packing) | 2.16 g             |
| Customs tariff number                | 85369010           |
| Country of origin                    | IN                 |

## Technical Data

### Product properties

|                           |                                            |
|---------------------------|--------------------------------------------|
| Type                      | Component suitable for through hole reflow |
| Product line              | COMBICON Terminals XS                      |
| Product type              | Printed circuit board terminal             |
| Product family            | PTSM 0,5/...-V-THR                         |
| Number of positions       | 2                                          |
| Pitch                     | 2.5 mm                                     |
| Number of connections     | 2                                          |
| Number of rows            | 1                                          |
| Number of potentials      | 2                                          |
| Pin layout                | Linear pinning                             |
| Solder pins per potential | 2                                          |

### Electrical properties

|                             |        |
|-----------------------------|--------|
| Nominal current $I_N$       | 6 A    |
| Nominal voltage $U_N$       | 160 V  |
| Degree of pollution         | 3      |
| Rated voltage (III/3)       | 63 V   |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated voltage (III/2)       | 160 V  |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated voltage (II/2)        | 200 V  |
| Rated surge voltage (II/2)  | 2.5 kV |

### Connection data

#### Connection technology

|                       |                                            |
|-----------------------|--------------------------------------------|
| Type                  | Component suitable for through hole reflow |
| Nominal cross section | 0.5 mm <sup>2</sup>                        |

#### Conductor connection

|                                                                       |                                                                                                                                                                       |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection method                                                     | Push-in spring connection                                                                                                                                             |
| Conductor cross section solid                                         | 0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>                                                                                                                          |
| Conductor cross section flexible                                      | 0.2 mm <sup>2</sup> ... 0.5 mm <sup>2</sup> (up to 0.75 mm <sup>2</sup> supported, with a stripping length of 7.5 mm and a rated insulation voltage of 32 V at III/2) |
| Conductor cross section AWG                                           | 26 ... 20                                                                                                                                                             |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>                                                                                                                          |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.25 mm <sup>2</sup> ... 0.34 mm <sup>2</sup>                                                                                                                         |
| Cylindrical gauge a x b / diameter                                    | - / 1.2 mm                                                                                                                                                            |
| Stripping length                                                      | 6 mm                                                                                                                                                                  |

### Mounting

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

|               |                |
|---------------|----------------|
| Mounting type | THR soldering  |
| Pin layout    | Linear pinning |

## Processing notes

|                                           |                       |
|-------------------------------------------|-----------------------|
| Process                                   | Reflow/wave soldering |
| Moisture Sensitive Level                  | MSL 1                 |
| Classification temperature T <sub>c</sub> | 260 °C                |
| Solder cycles in the reflow               | 3                     |

## Material specifications

### Material data - contact

|                                          |                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                         |
| Surface characteristics                  | hot-dip tin-plated                                                               |
| Metal surface terminal point (top layer) | Tin (4 - 8 µm Sn)                                                                |
| Metal surface soldering area (top layer) | Tin (4 - 8 µm Sn)                                                                |

### Material data - housing

|                                        |              |
|----------------------------------------|--------------|
| Color (Housing)                        | black (9005) |
| Insulating material                    | LCP          |
| Insulating material group              | IIIa         |
| CTI according to IEC 60112             | 175          |
| Flammability rating according to UL 94 | V0           |

### Material data – actuating element

|           |     |
|-----------|-----|
| Color ( ) | ( ) |
|-----------|-----|

## Notes

|                     |                                                                                                                                               |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Note on application | Pick and place pads may protrude beyond the components. The PCB layout must ensure that collisions are avoided when components are assembled. |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|

## Dimensions

### PCB design

|             |        |
|-------------|--------|
| Pin spacing | 2.5 mm |
|-------------|--------|

## Mechanical tests

### Connection test

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60998-2-2:2002-12 |
| Result        | Test passed           |

### Test for conductor damage and slackening

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60998-2-2:2002-12 |
| Result        | Test passed           |

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

## Pull-out test

|                                                                             |                                          |
|-----------------------------------------------------------------------------|------------------------------------------|
| Specification                                                               | IEC 60998-2-2:2002-12                    |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.14 mm <sup>2</sup> / solid / > 10 N    |
|                                                                             | 0.2 mm <sup>2</sup> / flexible / > 10 N  |
|                                                                             | 0.5 mm <sup>2</sup> / solid / > 20 N     |
|                                                                             | 0.75 mm <sup>2</sup> / flexible / > 30 N |

## Flexion test

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60998-2-2:2002-12 |
| Result        | Test passed           |

## Electrical tests

### Temperature-rise test

|                                   |                                |
|-----------------------------------|--------------------------------|
| Specification                     | IEC 60998-2-1:2002-12          |
| Requirement temperature-rise test | Increase in temperature ≤ 45 K |

### Insulation resistance

|                                              |                     |
|----------------------------------------------|---------------------|
| Specification                                | IEC 60998-1:2002-12 |
| Insulation resistance, neighboring positions | > 5 MΩ              |

### Air clearances and creepage distances |

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| Specification                                          | IEC 60664-1:2007-04 |
| Insulating material group                              | IIIa                |
| Comparative tracking index (IEC 60112)                 | CTI ≥ 175 to < 400  |
| Rated insulation voltage (III/3)                       | 63 V                |
| Rated surge voltage (III/3)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/3) | 1.5 mm              |
| minimum creepage distance (III/3)                      | 2 mm                |
| Rated insulation voltage (III/2)                       | 160 V               |
| Rated surge voltage (III/2)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/2) | 1.5 mm              |
| minimum creepage distance (III/2)                      | 2 mm                |
| Rated insulation voltage (II/2)                        | 200 V               |
| Rated surge voltage (II/2)                             | 2.5 kV              |
| minimum clearance value - non-homogenous field (II/2)  | 1.5 mm              |
| minimum creepage distance (II/2)                       | 2 mm                |

## Environmental and real-life conditions

### Vibration test

|               |                             |
|---------------|-----------------------------|
| Specification | IEC 60068-2-6:2007-12       |
| Frequency     | 10 - 150 - 10 Hz            |
| Sweep speed   | 1 octave/min                |
| Amplitude     | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed   | 5g (60.1 Hz ... 150 Hz)     |

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

|                        |       |
|------------------------|-------|
| Test duration per axis | 2.5 h |
|------------------------|-------|

## Glow-wire test

|                  |                     |
|------------------|---------------------|
| Specification    | IEC 60998-1:2002-12 |
| Temperature      | 850 °C              |
| Time of exposure | 5 s                 |

## Ambient conditions

|                                         |                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 100 °C (Depending on the current carrying capacity/derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                                              |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                                                 |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                                              |

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block




1770953

<https://www.phoenixcontact.com/in/products/1770953>

## Drawings

Dimensional drawing

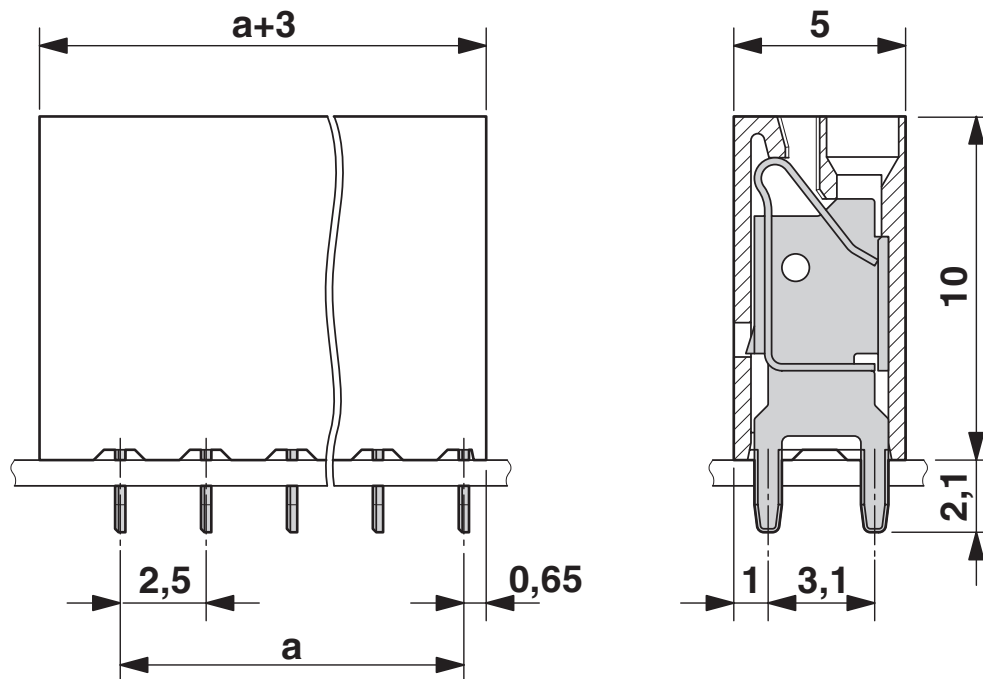


# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block


1770953

<https://www.phoenixcontact.com/in/products/1770953>



Dimensional drawing

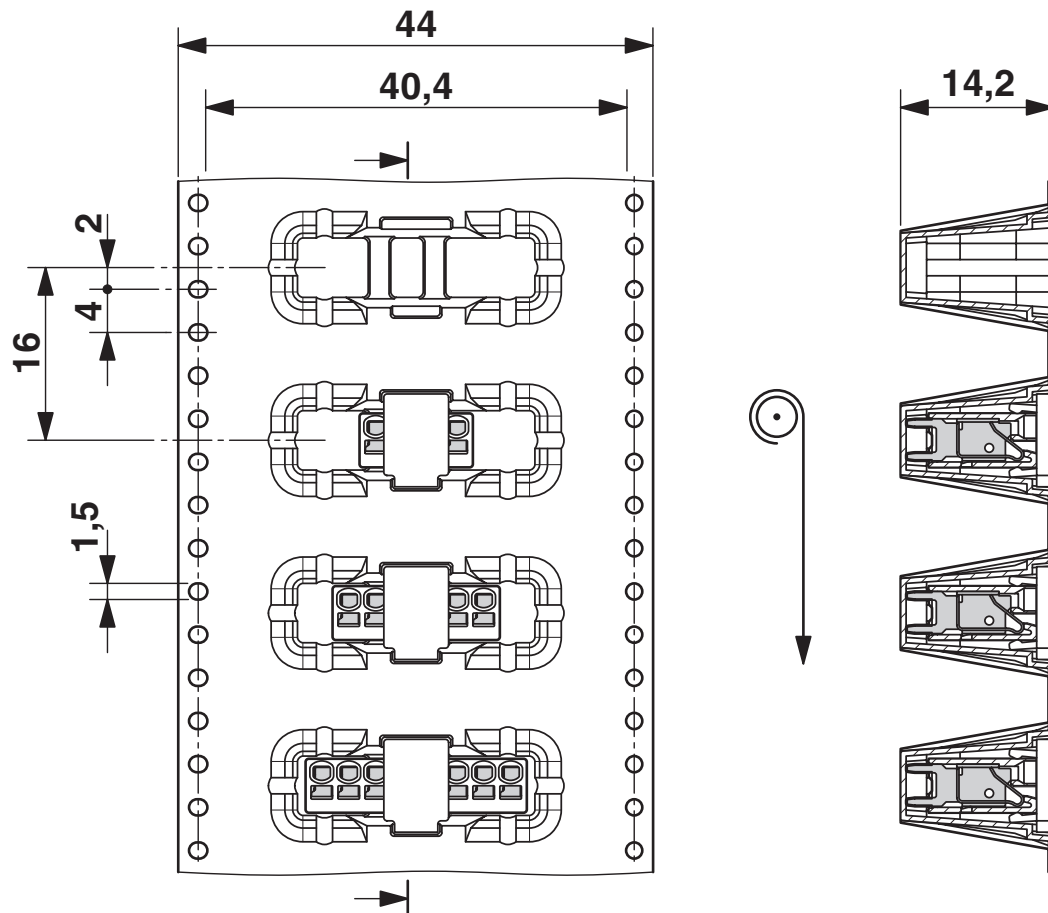

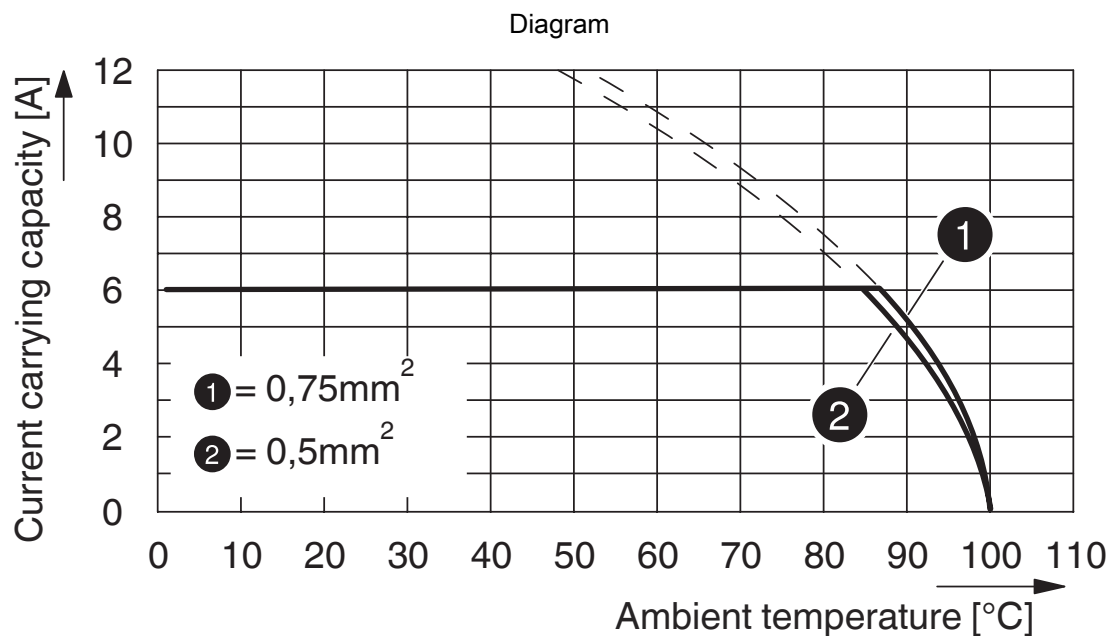


Type: PTSM 0,5/...-2,5-V THR R44

Tested according to DIN EN 60512-5-2:2003-01

Reduction factor = 1

Number of positions: 5

Drilling plan/solder pad geometry

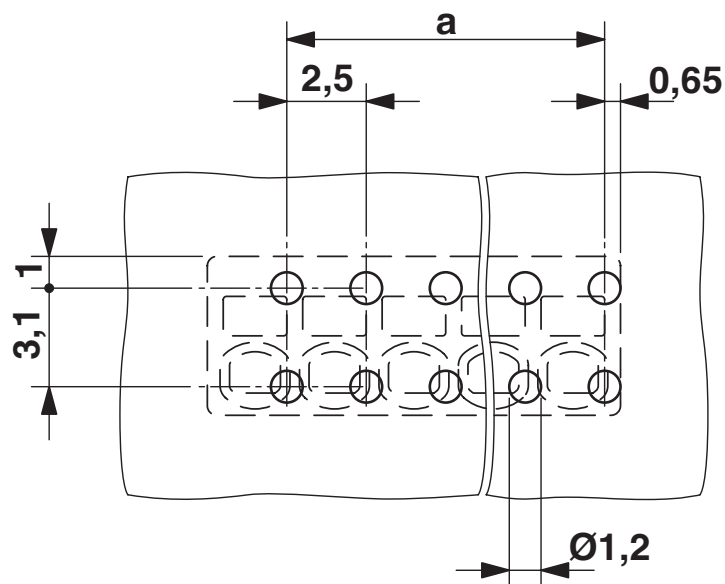



# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

## Approvals



**UL Recognized**

Approval ID: E118976-20130619



**EAC**

Approval ID: B.01687



**cULus Recognized**

Approval ID: E60425-20030527



**VDE Zeichengenehmigung**

Approval ID: 40048725

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-10.0.1 | 27440401 |
| ECLASS-11.0   | 27460101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002643 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

## Accessories

### SZS 0,4X2,0 - Screwdriver

1205202

<https://www.phoenixcontact.com/in/products/1205202>



Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap

---

### AI 0,25- 6 BU - Ferrule

3203040

<https://www.phoenixcontact.com/in/products/3203040>



Ferrule, sleeve length: 6 mm, length: 10.5 mm, color: blue

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

## AI 0,25- 6 YE - Ferrule

3203024

<https://www.phoenixcontact.com/in/products/3203024>



Ferrule, sleeve length: 6 mm, length: 10.5 mm, color: yellow

---

## AI 0,34- 6 TQ - Ferrule

3203053

<https://www.phoenixcontact.com/in/products/3203053>



Ferrule, sleeve length: 6 mm, length: 10.5 mm, color: turquoise

# PTSM 0,5/ 2-2,5-V THR R44 - PCB terminal block



1770953

<https://www.phoenixcontact.com/in/products/1770953>

## SAMPLE PTSM 0,5/ 2-2,5-V-THR - PCB terminal block

1701100

<https://www.phoenixcontact.com/in/products/1701100>



PCB terminal block, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of potentials: 2, number of rows: 1, number of positions per row: 2, product range: PTSM 0,5/..-V-THR, pitch: 2.5 mm, connection method: Push-in spring connection, mounting: THR soldering, conductor/PCB connection direction: 90 °, color: black, Pin layout: Linear pinning, Solder pin [P]: 2.1 mm, number of solder pins per potential: 2, type of packaging: packed in cardboard. SAMPLE set with 5 items in belt section. When used as part of soldering process, please use items without SAMPLE marking

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)